SATCO® | NUVO®

LED LAMPS & DOWNLIGHT RETROFITS

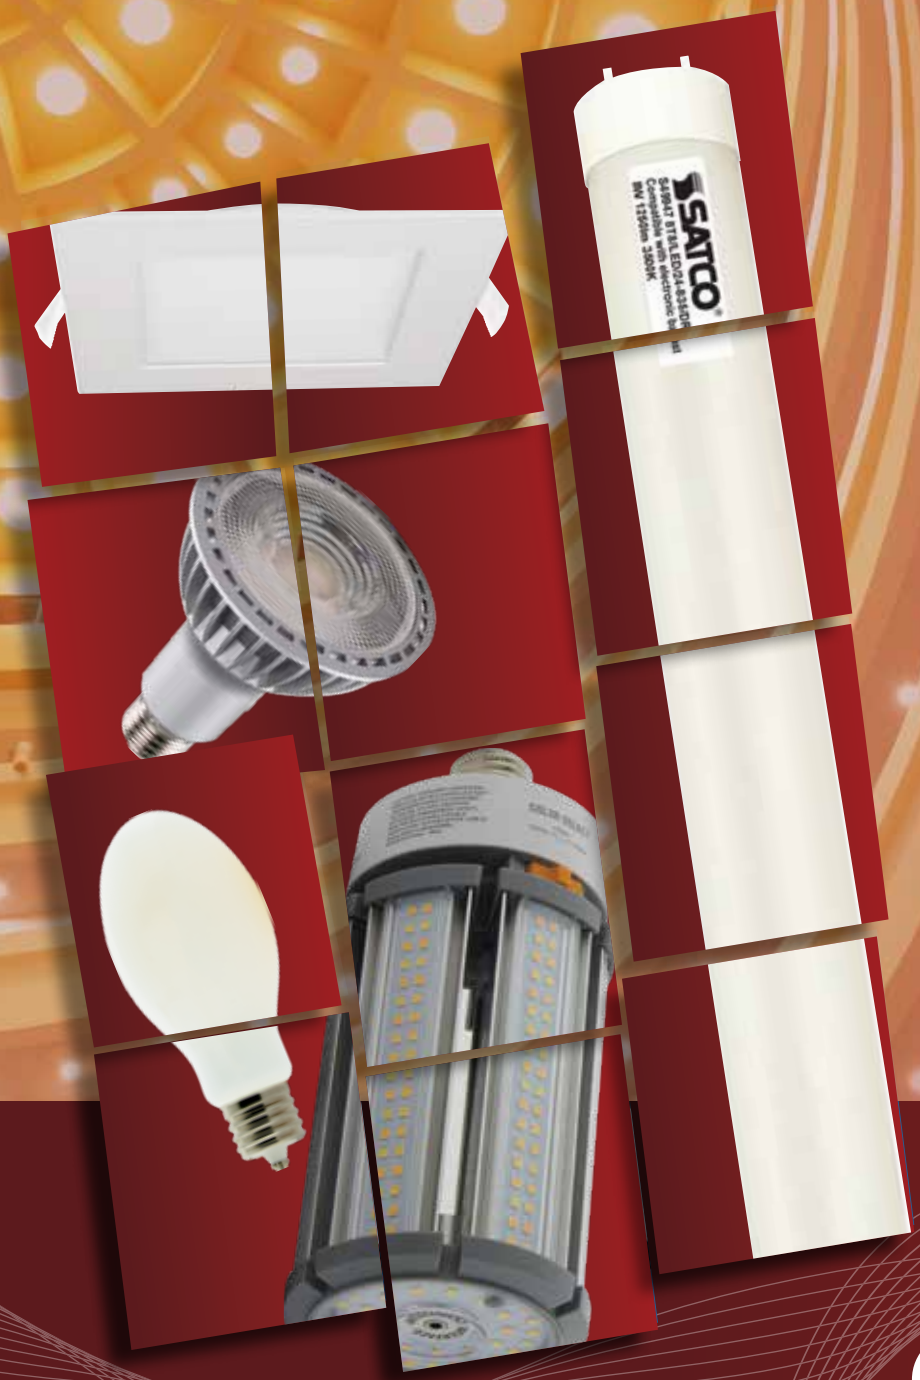

SATCO **LED LAMPS**

SATCO® | NUVO®

SATCO LED lamps offer one of today's largest selections of LED products — providing solutions for the commercial, industrial and residential markets.

We bring quality, value and design to every product we create. With advancing technology, we improve performance, energy savings, safety, ease of installation and maintenance, and overall satisfaction.

We are your partners in success — from convenient packaging options and retail support to inventory supply.

SATCO is the lighting solution you can count on for the products you can rely on!

We do the LIGHT thing.
We do the RIGHT thing.™

SATCO is your single source solution for all of your lighting needs. From emerging LED technologies to decorative fixtures and lighting components, we carryproducts for nearly every industry and application. As a turnkey lighting operation, SATCO brings efficiency, value and an ease of doing business to our customers.

Independent and privately owned for over 50 years, SATCO continues to grow because of our traditional values: trust, quality, loyalty and hard work. Agile in practice, unwavering in customer focus...

...we deliver on product, promise & partnership.

Est. 1966

50+ YEARS IN BUSINESS

100% INDEPENDENT PRIVATELY OWNED

15,000 + PRODUCTS

2 MILLION SQ. FT OF INVENTORY

6 WAREHOUSE LOCATIONS

Satco has two lines of product to help you meet California's Building and Appliance codes:
Building Code (Title 24): The full line of Joint Appendix 8 (JA8) lamps are certified to the Title 24 2016 building code. These products will help you comply with the newest California residential building codes.
Appliance Code (Title 20): Lamps and Retrofit Kits are considered appliances in the California Code, and Title 20 is one of the most stringent in the country. Satco has a full line of products that are compliant with this code.

As an ongoing effort on behalf of Satco Products, Inc. to remain dedicated to the improvement of our products, we reserve the right to change specifications. The information contained in this specification guide is subject to change without notice. We cannot be responsible for typographical errors.

Table of Contents

Starfish™ (Smart Lighting) 6-11
LED Filament (A-Type) 12-16
LED Filament (Decorative) 17-25
LED Filament (Specialty/Carded) 26-37
Indicator and sign bulbs 38-39
A-type and Deco Traditional heat sink 40-55
LED A-Type High Lumen 56-59
Specialty lamps 60-67
R20, BR30, BR40 68-71
PAR20, PAR30, PAR38 72-83
AR111 and MR 84-91
T3 and T4 replacements 92-93
Downlight Retrofits 94-101
Hi-PRO lamps (HID replacements) 102-121
Pin Based CFL replacements 122-129
Linear T8 and T5 replacements (Types A,B,C) 130-153
Circline T9 154
Emergency Drivers (for Type B lamps) 155
Linear T8 Sign Lamps 156
Circular LED Module Retrofit Kits 157
Index 159

SATCO® | NUVO®

LED FILAMENT & DECORATIVE LAMPS

The popularity of the exposed bulb in lighting design continues the evolution in filament lamp design. From new shapes in the the filament and structure to amber toned, silver domed and frosted lamps.

Advanced technologies improve energy efficiency, enhance light quality, expand damp and wet location options and offer new lamps in a variety of bases.

Plus, new packaging alternatives are available for your convenience.

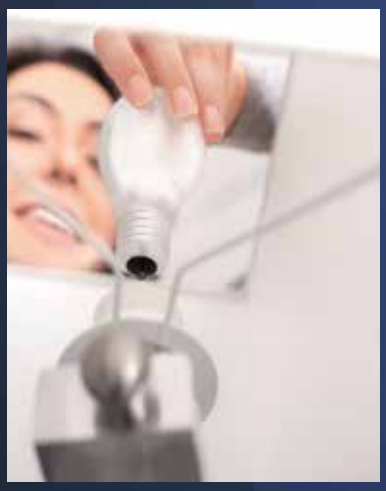

GENERAL SERVICE LAMPS

SATCO's vast offering of LED lamps continues to grow with technologies that help retrofit fixtures in nearly every setting.

Our lamps provide significant energy efficiency while preserving the look and feel traditional bulbs.

We are committed to our customers at every level of business, from retail display packaging, single bulb packs, to contractor's packs for convenience.

All with the quality and assurance you can be confident in.

BR & REFLECTOR LAMPS

SATCO's 2022 offering of LED BR & PAR lamps includes improved efficiency, higher CRI and greater values—all in a significantly broader range!
From our expanded line of GEN2 PAR Silver PARs to our new generation of high lumen and range voltage industrial and commercial PAR lamps; to new choices in MR11 and MR16 lamps, the solutions just keep growing!

We do the LIGHT thing.
We do the RIGHT thing.™

DOWNLIGHT RETROFITS

SATCO's LED vast line of recessed downlight retrofits offers options in various aesthetics, improved efficiency, and easy installation.

The new generations include additional sizes, finishes and features including gimbals and CCT selectable options.

Downlight retrofits remain one of SATCO's most popular categories of lighting for their value and convenience.

HI-PRO HID REPLACEMENTS

Advancements in our commercial and industrial line of High Lumen Professional Grade lamps continue. From quality of light including higher efficiency to design improvements featuring lighter body weight, advanced heat dissipation and increased internal surge protection—they just keep getting better.

Plus, many of SATCO's lamps offer add-on sensors and smart options. Large scale lighting projects just got easier!

CFL & LINEAR FLUORESCENT REPLACEMENT

SATCO's CFL and linear replacement options continue to focus on safety, light quality and the ease of installation when it comes to replacing traditional CFL and linear bulbs.

SATCO's broad line of CFL and linear replacement options for traditional fixture retrofits provide solutions to help bridge your customers' needs into tomorrow.

STARFISH SMART LED LIGHTING AND CONTROL

Welcome to STARFISH™

The simple, scalable, smart lighting solution brought to you by SATCO®, America's lighting resource for over 50 years.

STARFISH™ smart lighting connects life and home together helping enhance convenience, security, atmosphere and wellness.

Through Wi-Fi, STARFISH™ synchronizes your life and your home using mobile and voice activated devices. It's easy and convenient; no hub required.

Features:

- Color changeable
- Tunable white, 80 or 90 CRI, 2700K-5000K
- Dimmable with Starfish App
- Scalable
- Wi-fi enabled
- No hub required

connection security atmosphere convenience wellness

WI-FI LED RGB & TUNABLE WHITE BULBS

STARFISH™

LED Color Changing and Tunable White bulbs replace standard medium base lamps with smart technology adding dynamic color changes and toning whites from warm-to-cool light.

- RGB Color✢
- Tunable White, 80 or 90 CRI 2700–5000K✹
- Damp or wet location
- Dimmable, with app

S11252✢, S11253✢, S11254✢, S11275✢

S11250✹

S11274✹

S11251✹

S11255✢, S11256✢, S11257✢, S11276✢

S11258✢, S11277✢

S11271✢, S11278✢

Item	Description	W	V	Bulb Type	Base	Lm	CRI	MOD (in.)	MOL (in.)	Life (hrs.)	UPC	Pack
Standard A19 Color Changeable & Tunable White												
S11252	9.5A19/LED/RGB/TW/SF	9.5	120	A19	E26	800	80	2.36	4.57	25K	045923112522	1/24
S11253	9.5A19/LED/RGB/TW/SF/2PK	9.5	120	A19	E26	800	80	2.36	4.57	25K	045923112539	2/24
S11254▲	10A19/LED/RGB/TW/T20/SF	10	120	A19	E26	800	90	2.36	4.57	15K	045923112546	1/24
S11275▲	10A19/LED/RGB/TW/T20/SF/2PK	10	120	A19	E26	800	90	2.36	4.57	15K	045923112751	2/24
LED Filament Tunable White												
S11250	5A19/LED/TW/CL/SF	5	120	A19	E26	450	80	2.36	4.33	15K	045923112508	1/24
S11274▲	7.5A19/LED/TW/CL/T20/SF	7.5	60	A19	E26	800	90	2.36	4.33	15K	045923112744	12/24
S11251	4.5G25/LED/TW/CL/SF	4.5	120	G25	E26	450	80	3.15	4.45	15K	045923112515	1/24
Directional Reflectors Color Changeable & Tunable White												
S11255	9.5BR30/LED/RGB/TW/SF	9.5	120	BR30	E26	800	80	3.70	5.12	25K	045923112553	1/12
S11256	9.5BR30/LED/RGB/TW/SF/2PK	9.5	120	BR30	E26	800	80	3.70	5.12	25K	045923112560	2/12
S11257▲	9.5BR30/LED/RGB/TW/T20/SF	9.5	120	BR30	E26	760	90	3.70	5.12	25K	045923112577	1/12
S11276▲	9.5BR30/LED/RGB/TW/T20/SF/2PK	9.5	120	BR30	E26	760	90	3.70	5.12	25K	045923112768	2/12
S11258	15PAR38/LED/RGB/TW/SF	15	120	PAR38	E26	1200	80	4.72	5.00	25K	045923112584	1/12
S11277▲	15PAR38/LED/RGB/TW/T20/SF	15	120	PAR38	E26	1200	90	4.72	5.00	25K	045923112775	1/12
S11271	5.5MR16/GU10/RGB/TW/SF	5.5	120	MR16	GU10	400	80	2.20	1.97	25K	045923112713	1/48
S11278▲	5.5MR16/GU10/RGB/TW/T20/SF	5.5	120	MR16	GU10	385	90	2.20	1.97	25K	045923112782	1/48

STARFISH™

WI-FI LED TUNABLE WHITE DOWNLIGHTS

LED Tunable White Downlights are a practical solution for converting existing recessed lighting into energy efficient smart lighting that is dimmable and adjusts from warm-to-cool settings with the STARFISH™ app.

- RGB Color✢
- Tunable White, 80 and 90 CRI 2700–5000K✺
- Wet location
- Dimmable, with app
- Connector or Adapter

S11279✢

S11280✢

S11259✺

S11260✺

S11261✺

S11262✺

Item	Description	W	V	Type	Base	Lm	CRI	Diameter (in.)	Height (in.)	Life (hrs.)	UPC	Pack
S11259	8.7W/LED/RDL/4/TW/T20/JA8/SF	8.7	120	Retrofit	E26 Adapter	700	90	5.12	2.80	25K	045923112591	1/6
S11260	10W/LED/RDL/5-6/TW/T20/JA8/SF	10	120	Retrofit	E26 Adapter	800	90	7.36	2.89	25K	045923112607	1/6
S11279	10WLED/DW/4"/RGB/TW/RD/T24/SF	10	120	Retrofit	Remote Driver	650	90	5.31	1.50	25K	045923112799	1/6
S11280	12WLED/DW/6"/RGB/TW/RD/T24/SF	12	120	Retrofit	Remote Driver	800	90	7.20	1.50	25K	045923112805	1/6
S11261	10WLED/DW/4"/TW/RD/SF	10	120	EdgeLit	Remote Driver	650	80	5.31	1.50	25K	045923112614	1/6
S11262	12WLED/DW/6"/TW/RD/SF	12	120	EdgeLit	Remote Driver	850	80	7.20	1.50	25K	045923112621	1/6

STARFISH™

WI-FI LED COLOR CHANGING & TUNABLE WHITE TAPE LIGHT

Color changing and tunable white indoor and outdoor tape lights are dimmable with thousands of color and warm-to-cool white settings, damp location certified and offer an ever-changing array of versatility.

- RGB Color✢
- Tunable White, 80 CRI 3000–6500K
- Wet location, outdoor
- Damp location, Indoor
- Dimmable, with app

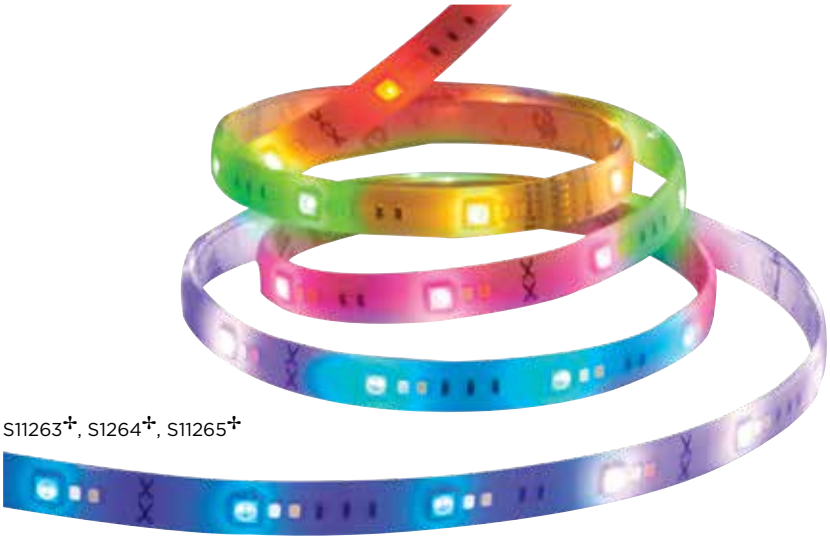

S11263✢, S1264✢, S11265✢

Plug & In-Line Controller Included

Item	Description	W	V	Type	CRI	Length (Ft.)	UPC	Pack
S11263	20W/LED/STRIP/IP20/SF/6FT	20	120	Indoor Tape	80	6'	045923112638	1/4
S11264	8W/LED/STRIP/IP20/SF/3FT-EXT	8	120	Indoor Tape Ext.»	80	3'	045923112645	1/48
S11265	28W/LED/STRIP/IP65/SF/16FT	28	120	Outdoor Tape	80	16	045923112652	1/4

»Up to 8 extensions can be used with S11263 6' indoor tape

WI-FI 24′ LED RGB & WARM WHITE 10-LIGHT OUTDOOR STRING LIGHT

STARFISH™

Dimmable, long lasting and wet location certified, STARFISH™ plug-in string lights are portable and can be used indoors or out.

Features:

- Durable black wire
- Connect up to 3 sets

S11272✢

RGB Color✢

Warm White, 80 CRI 2700K

Wet location

Dimmable, with app

S11273✢

Item	Description	W	V	Type	CRI	Length (Ft.)	Width (In.)	Height (In.)	UPC	Pack
S11272	10W/LED/STRING/RGBW/SF	10	120	String Lights	80	24	1.77	7.48	045923112720	1 Set Box/4
S11273	1S14/LED/RGBW/12V/SF/2PK	1	12	Replacement Bulb	80	—	1.77	3.46	045923112737	2 Pk. Card/48

STARFISH™ WI-FI SMART SWITCHES & OUTLETS

Enable smart on-off or dimming control throughout a circuit utilizing STARFISH™ Wall and Dimmer Switches and Outlets.

- Dry location
- Dimmer Only
- Direct Wire, Neutral Wire required

Enable smart ON-OFF of small appliances with STARFISH™ plug-in outlets.

- Dry location
- Plug-in

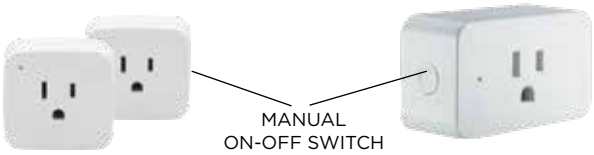

The rectangular Wi-Fi DIMMER outlet allows for ON-OFF and dimming operation of lighting to a maximum of 300W of incandescent or 150W LED loads.

- Dry location
- Dimmable, with app
- Plug-in

Item	Description	W	V	Type	Amps	Length (In.)	Width (In.)	Height (In.)	UPC	Pack
S11267	SF/ON-OFF/WALL/WHITE	720	120	ON-OFF Switch	—	2.951	2.17	5.12	045923112676	1/12
S11268	SF/DIM/WALL/WHITE	720	120	Dimmer	—	2.95	2.17	5.12	045923112683	1/12
S11266	15A/SMART-PLUG/SF	1875	125	ON-OFF Outlet	15	1.71	2.76	4.53	045923112669	1/12
S11269	10A/SMART-PLUG/SF/2PK (MINI SQ)	1250	125	Mini Square Plug-In Outlet	10	1.99	1.99	1.99	045923112690	2/12
S11270	15A/SMART-PLUG/SF/DIM (RECTANG)	300	125	ON-OFF DIMMER Outlet	—	2.87	1.69	1.97	045923112706	1/12

90 CRI LED A15, A19 FILAMENT LAMPS

Features:

- 90 CRI "A" lamps
- 40-100w replacements
- High lumens & efficiency
- Clear and soft white options
- 4 CCT options
- Approves for enclosed fixtures^
- Dimmable
- Long life

Applications:

- Residential
- Hospitality
- Commercial
- Retail
- Display

90 CRI LED A15 FILAMENT LAMPS 40W, 60W REPLACEMENTS

A15 SW

A15 CL



Beam Angle: 320°

Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant | WET LOCATION^ | ENCLOSED FIXTURE | DIMMABLE | 90 CRI | c UL LISTED us | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
40W Replacement														
S12400	5A15/CL/LED/E26/927/120V	5	120	A15	E26	CL	2700K	450	90	3.39	1.89	15K	045923124006	24/6
S12401	5A15/CL/LED/E26/930/120V	5	120	A15	E26	CL	3000K	450	90	3.39	1.89	15K	045923124013	24/6
S12402	5A15/CL/LED/E26/940/120V	5	120	A15	E26	CL	4000K	450	90	3.39	1.89	15K	045923124020	24/6
S12403	5A15/CL/LED/E26/950/120V	5	120	A15	E26	CL	5000K	450	90	3.39	1.89	15K	045923124037	24/6
S12404	5A15/SW/LED/E26/927/120V	5	120	A15	E26	SW	2700K	450	90	3.39	1.89	15K	045923124044	24/6
S12405	5A15/SW/LED/E26/930/120V	5	120	A15	E26	SW	3000K	450	90	3.39	1.89	15K	045923124051	24/6
60W Replacement														
S12406	8.2A15/CL/LED/E26/930/120V	8.2	120	A15	E26	CL	3000K	800	90	3.39	1.89	15K	045923124068	24/6
S12407	8.2A15/SW/LED/E26/930/120V	8.2	120	A15	E26	SW	3000K	800	90	3.39	1.89	15K	045923124075	24/6

^ See warranty for details at www.satco.com

Product sheet SA2690

90 CRI LED A19 FILAMENT LAMPS 40W, 60W REPLACEMENTS

A19 SW

A19 CL



Beam Angle: 320°

Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant | WET LOCATION | ^ ENCLOSED FIXTURE | DIMMABLE | 90 CRI | c UL us LISTED | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
40W Replacement														
S12408	5A19/CL/LED/E26/927/120V	5	120	A19	E26	CL	2700K	450	90	4.02	2.36	15K	045923124082	24/6
S12409	5A19/CL/LED/E26/930/120V	5	120	A19	E26	CL	3000K	450	90	4.02	2.36	15K	045923124099	24/6
S12410	5A19/CL/LED/E26/940/120V	5	120	A19	E26	CL	4000K	450	90	4.02	2.36	15K	045923124105	24/6
S12411	5A19/CL/LED/E26/950/120V	5	120	A19	E26	CL	5000K	450	90	4.02	2.36	15K	045923124112	24/6
S12412	5A19/SW/LED/E26/927/120V	5	120	A19	E26	SW	2700K	450	90	4.02	2.36	15K	045923124129	24/6
S12413	5A19/SW/LED/E26/930/120V	5	120	A19	E26	SW	3000K	450	90	4.02	2.36	15K	045923124136	24/6

^ See warranty for details at www.satco.com

Product sheet SA2690

A19 FR

A19 CL

A19 SLV



+Beam Angle: 320°

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant | Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant | ‡ DAMP LOCATION | WET LOCATION | ^ ENCLOSED FIXTURE | DIMMABLE | 90 CRI | c UL us LISTED | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
60W Replacement														
S39879■ ‡	8A19/CL/LED/E26/927/120V	8	120	A19	E26	CL	2700K	800	90	4.13	2.38	15K	045923398797	24/6
S12414	8A19/CL/LED/E26/927/120V	8	120	A19	E26	CL	2700K	800	90	4.02	2.36	15K	045923124143	24/6
S12415	8A19/CL/LED/E26/930/120V	8	120	A19	E26	CL	3000K	800	90	4.02	2.36	15K	045923124150	24/6
S12416	8A19/CL/LED/E26/935/120V	8	120	A19	E26	CL	3500K	800	90	4.02	2.36	15K	045923124167	24/6
S12417	8A19/CL/LED/E26/940/120V	8	120	A19	E26	CL	4000K	800	90	4.02	2.36	15K	045923124174	24/6
S12418	8A19/CL/LED/E26/950/120V	8	120	A19	E26	CL	5000K	800	90	4.02	2.36	15K	045923124181	24/6
S12419	8.2A19/SW/LED/E26/927/120V	8.2	120	A19	E26	SW	2700K	800	90	4.02	2.36	15K	045923124198	24/6
S12420	8.2A19/SW/LED/E26/930/120V	8.2	120	A19	E26	SW	3000K	800	90	4.02	2.36	15K	045923124204	24/6
S12421+	6A19/SLV/LED/E26/927/120V	6	120	A19	E26	SLVR CRWN	2700K	650	90	4.02	2.36	15K	045923124211	24/6
S11355■	8A19/CL/LED/E26/930/120V	8	120	A19	E26	CL	3000K	800	90	4.13	2.38	15K	045923113550	24/6
S11356■	8A19/SW/LED/E26/930/120V	8	120	A19	E26	SW	2700K	800	90	4.13	2.38	15K	045923113567	24/6

^ See warranty for details at www.satco.com. +Silver crown are 180˚ beam angle

Product sheet SA2690

90 CRI LED A19 FILAMENT LAMPS 75W, 100W REPLACEMENTS

A19 SW

A19 CL



Beam Angle: 320°

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant | Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant | WET LOCATION | ^ ENCLOSED FIXTURE | DIMMABLE | 90 CRI | c UL us LISTED | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
75W Replacement														
S12422	10.5A19/CL/LED/E26/927/120V	10.5	120	A19	E26	CL	2700K	1100	90	4.02	2.36	15K	045923124228	24/6
S12423	10.5A19/CL/LED/E26/930/120V	10.5	120	A19	E26	CL	3000K	1100	90	4.02	2.36	15K	045923124235	24/6
S12424	10.5A19/CL/LED/E26/940/120V	10.5	120	A19	E26	CL	4000K	1100	90	4.02	2.36	15K	045923124242	24/6
S12425	10.5A19/CL/LED/E26/950/120V	10.5	120	A19	E26	CL	5000K	1100	90	4.02	2.36	15K	045923124259	24/6
S12426	11A19/SW/LED/E26/927/120V	11	120	A19	E26	SW	2700K	1100	90	4.02	2.36	15K	045923124266	24/6
S12427	11A19/SW/LED/E26/930/120V	11	120	A19	E26	SW	3000K	1100	90	4.02	2.36	15K	045923124273	24/6
S12428	11A19/SW/LED/E26/940/120V	11	120	A19	E26	SW	4000K	1100	90	4.02	2.36	15K	045923124280	24/6
S11357■	11A19/CL/LED/E26/927/120V	11	120	A19	E26	CL	2700K	1100	90	4.02	2.36	15K	045923113574	24/6
S11358■	11A19/CL/LED/E26/930/120V	11	120	A19	E26	CL	3000K	1100	90	4.02	2.36	15K	045923113581	24/6
S11359■	11A19/SW/LED/E26/927/120V	11	120	A19	E26	SW	2700K	1100	90	4.02	2.36	15K	045923113598	24/6

^ See warranty for details at www.satco.com

Product sheet SA2690

A19 SW

A19 CL



Beam Angle: 320°

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant | Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant | WET LOCATION | DIMMABLE | 90 CRI | c UL us LISTED | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
100W Replacement														
S12429	12.5A19/CL/LED/E26/927/120V	12.5	120	A19	E26	CL	2700K	1500	90	4.41	2.36	15K	045923124297	24/6
S12430	12.5A19/CL/LED/E26/930/120V	12.5	120	A19	E26	CL	3000K	1500	90	4.41	2.36	15K	045923124303	24/6
S12431	12.5A19/CL/LED/E26/940/120V	12.5	120	A19	E26	CL	4000K	1500	90	4.41	2.36	15K	045923124310	24/6
S12432	12.5A19/CL/LED/E26/950/120V	12.5	120	A19	E26	CL	5000K	1500	90	4.41	2.36	15K	045923124327	24/6
S12433	13.5A19/SW/LED/E26/927/120V	13.5	120	A19	E26	SW	2700K	1500	90	4.41	2.36	15K	045923124334	24/6
S12434	13.5A19/SW/LED/E26/930/120V	13.5	120	A19	E26	SW	3000K	1500	90	4.41	2.36	15K	045923124341	24/6
S12435	13.5A19/SW/LED/E26/940/120V	13.5	120	A19	E26	SW	4000K	1500	90	4.41	2.36	15K	045923124358	24/6
S11360■	14A21/CL/LED/E26/927/120V	14	120	A21	E26	CL	2700K	1600	90	5.00	2.76	15K	045923113604	24/6
S11361■	14A21/CL/LED/E26/930/120V	14	120	A21	E26	CL	3000K	1600	90	5.00	2.76	15K	045923113611	24/6
S11362■	14A21/SW/LED/E26/927/120V	14	120	A21	E26	SW	2700K	1600	90	5.00	2.76	15K	045923113628	24/6

Product sheet SA2690

LED FILAMENT LAMPS MULTI-PACKS

60-75 Watt Replacement

100 Watt Replacement



Beam Angle: 360°

360° BEAM | DIMMABLE ^ | ENCLOSED FIXTURE ‡ | DAMP LOCATION § | WET LOCATION | c UL us LISTED * | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
40 Watt Replacement														
S21712*‡	5A19/CL/LED/E26/27K/120V/4PK	5	120	A19	E26	CL	2700K	450	80	4.00	2.38	15K	045923217128	12-4pks
60 Watt Replacement														
S21713*‡	7.5A19/CL/LED/E26/27K/120V/4PK	7.5	120	A19	E26	CL	2700K	800	80	4.00	2.38	15K	045923217135	12-4pks
S21714*‡	7.5A19/SW/LED/E26/27K/120V/4PK	7.5	120	A19	E26	FR	2700K	800	80	4.00	2.38	15K	045923217142	12-4pks
S21734*‡	7.5A19/CL/LED/E26/3K/120V/4PK	7.5	120	A19	E26	CL	3000K	800	80	4.06	2.38	15K	045923217340	12-4pks
75 Watt Replacement														
S12436§	10.5A19/CL/LED/927/120V/4PK	10.5	120V	A19	E26	CL	2700K	1100	90	4.02	2.36	15K	045923124365	12-4pks
S12437§	10.5A19/CL/LED/930/120V/4PK	10.5	120V	A19	E26	CL	3000K	1100	90	4.02	2.36	15K	045923124372	12-4pks
S12438§	11A19/FR/LED/927/120V/4PK	11	120V	A19	E26	FR	2700K	1100	90	4.02	2.36	15K	045923124389	12-4pks
S12439§	11A19/FR/LED/930/120V/4PK	11	120V	A19	E26	FR	3000K	1100	90	4.02	2.36	15K	045923124396	12-4pks
100 Watt Replacement														
S12442§	12.5A19/CL/LED/927/120V/4PK	12.5	120	A19	E26	CL	2700K	1500	80	4.41	2.36	15K	045923124426	12-4pks
S12443§	12.5A19/CL/LED/930/120V/4PK	12.5	120	A19	E26	CL	3000K	1500	80	4.41	2.36	15K	045923124433	12-4pks
S12440§	13.5A19/FR/LED/927/120V/4PK	13.5	120	A19	E26	FR	2700K	1500	80	4.41	2.36	15K	045923124402	12-4pks
S12441§	13.5A19/FR/LED/930/120V/4PK	13.5	120	A19	E26	FR	3000K	1500	80	4.41	2.36	15K	045923124419	12-4pks

^ See warranty for details at www.satco.com

LED FILAMENT LAMPS GLOBES - G16½ 25W, 40W & 60W REPLACEMENTS

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures^
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty

G16½ FR
E26

G16½ CL
E26

G16½ WH
E12

G16½ CL
E12



Beam Angle: 360°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
25 Watt Replacement														
S9870	2.5G16.5/LED/CL/27K/120V/E12	2.5	120	G16 1/2	E12	CL	2700K	200	80	3.19	2.06	15K	045923098703	24/6
40 Watt Replacement														
S29871*	4G16.5/LED/CL/27K/120V/E12	4	120	G16 1/2	E12	CL	2700K	350	80	3.13	2.00	15K	045923298714	24/6
60 Watt Replacement														
S29988*	5.5G16.5/LED/CL/27K/120V/E12	5.5	120	G16 1/2	E12	CL	2700K	500	80	3.13	2.00	15K	045923299889	24/6
S12100*	5.5G16.5/LED/CL/3K/120V/E12	5.5	120	G16 1/2	E12	CL	3000K	500	80	3.13	2.00	15K	045923121005	24/6
S12101*	5.5G16.5/LED/SW/3K/120V/E12	5.5	120	G16 1/2	E12	FR	3000K	500	80	3.13	2.00	15K	045923121012	24/6
S12102*	5.5G16.5/LED/CL/27K/120V/E26	5.5	120	G16 1/2	E26	CL	2700K	500	80	3.13	2.00	15K	045923121029	24/6
S12103*	5.5G16.5/LED/CL/3K/120V/E26	5.5	120	G16 1/2	E26	CL	3000K	500	80	3.13	2.00	15K	045923121036	24/6
S12104*	5.5G16.5/LED/CL/4K/120V/E26	5.5	120	G16 1/2	E26	CL	4000K	500	80	3.13	2.00	15K	045923121043	24/6
S12105*	5.5G16.5/LED/SW/3K/120V/E26	5.5	120	G16 1/2	E26	FR	3000K	500	80	3.13	2.00	15K	045923121050	24/6
90 CRI—CEC/T20▲														
40 Watt Replacement														
S8553*	4G16.5/LED/CL/27K/120V/E12	4	120	G16 1/2	E12	CL	2700K	350	90	3.25	2.00	15K	045923085536	24/6
S11364*	4.5G16.5/LED/SW/927/120V/E12	4.5	120	G16 1/2	E12	SW	2700K	360	90	3.25	1.97	15K	045923113642	24/6
S11363*	4.5G16.5/LED/CL/930/120V/E12	4.5	120	G16 1/2	E12	CL	3000K	360	90	3.25	1.97	15K	045923113635	24/6

^ See warranty for details at www.satco.com

Product sheet SA1980

LED FILAMENT LAMPS GLOBES - G25 40W & 60W REPLACEMENTS

G25 Clear
2 Pack

Clear G25

White G25

G25



360° Illumination+

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant 360° ILLUM DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
40 Watt Replacement														
S12107	4G25/SW/LED/E26/3K/120V	4	120	G25	E26	FR	3000K	350	80	4.50	3.13	15K	045923121074	24/6
S29563*	4.5G25/CL/LED/E26/27K/120V	4.5	120	G25	E26	CL	2700K	450	80	4.38	3.13	15K	045923295638	24/6
S9893*	4.5G25/CL/LED/E26/30K/120V	4.5	120	G25	E26	CL	3000K	450	80	4.38	3.13	15K	045923098932	24/6
S8849*	4.5G25/CL/LED/E26/40K/120V	4.5	120	G25	E26	CL	4000K	450	80	4.38	3.13	15K	045923088490	24/6
S12106	4.5G25/CL/LED/E26/5K/120V	4.5	120	G25	E26	CL	5000K	450	80	4.50	3.13	15K	045923121067	24/6
S9827*	4.5G25/SW/LED/E26/27K/120V	4.5	120	G25	E26	WH	2700K	420	80	4.38	3.13	15K	045923098277	24/6
S9828+	4.5G25/SLV/LED/E26/27K/120V	4.5	120	G25	E26	SLVR CRWN	2700K	430	80	4.38	3.13	15K	045923098284	24/6
60 Watt Replacement														
S9564	6.5G25/CL/LED/E26/27K/120V	6.5	120	G25	E26	CL	2700K	810	80	4.38	3.13	15K	045923095641	24/6
S12110	6.5G25/CL/LED/E26/3K/120V	6.5	120	G25	E26	CL	3000K	810	80	4.50	3.13	15K	045923121104	24/6
S12108	6.5G25/SW/LED/E26/27K/120V	6.5	120	G25	E26	WH	2700K	650	80	4.50	3.13	15K	045923121081	24/6
90 CRI—CEC/T20														
S29878*■▲	5.5G25/LED/927/CL/120V	5.5	120	G25	E26	CL	2700K	500	90	4.00	3.13	15K	045923298783	24/6
S11365*■▲	5.5G25/LED/930/CL/120V	5.5	120	G25	E26	CL	3000K	500	90	4.50	3.15	15K	045923113659	24/6
S11366*■▲	5.5G25/LED/930/SW/120V	5.5	120	G25	E26	WH	3000K	500	90	4.50	3.15	15K	045923113666	24/6
S12109	6.5G25/SW/LED/E26/3K/120V	6.5	120	G25	E26	WH	3000K	650	80	4.50	3.13	15K	045923121098	24/6
Multi-Pks														
40 Watt Replacement														
S21737*	4.5G25/LED/CL/27K/120V/2PK	4.5	120	G25	E26	CL	2700K	350	80	4.25	3.13	15K	045923217371	12-2pks
S21738*	4.5G25/LED/WH/27K/120V/2PK	4.5	120	G25	E26	WH	2700K	350	80	4.25	3.13	15K	045923217388	12-2pks
60 Watt Replacement														
S21739*	5.5G25/LED/CL/27K/120V/2PK	5.5	120	G25	E26	CL	2700K	500	80	4.75	3.13	15K	045923217395	12-2pks
S21740*	5.5G25/LED/WH/27K/120V/2PK	5.5	120	G25	E26	WH	2700K	500	80	4.75	3.13	15K	045923217401	12-2pks

See warranty for details at www.satco.com. +Silver crown are 180˚ beam angle

Product sheet SA1980

LED FILAMENT LAMPS GLOBES - G40 40W & 60W REPLACEMENTS

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures ˆ
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty

G40

G40



360° Illumination

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant 360° ILLUM DIMMABLE ˆ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
40 Watt Replacement														
S9565	4.5G40/CL/LED/E26/27K/120V	4.5	120	G40	E26	CL	2700K	450	80	6.50	4.88	15K	045923095658	12/6
60 Watt Replacement														
S9566	6.5G40/CL/LED/E26/27K/120V	6.5	120	G40	E26	CL	2700K	810	80	6.50	4.88	15K	045923095665	12/6
S12111	6.5G40/CL/LED/E26/3K/120V	6.5	120	G40	E26	CL	3000K	810	80	6.50	4.91	15K	045923121111	12/6
S12112	6.5G40/SW/LED/E26/27K/120V	6.5	120	G40	E26	WH	2700K	650	80	6.50	4.91	15K	045923121128	12/6
S12113	6.5G40/SW/LED/E26/3K/120V	6.5	120	G40	E26	WH	3000K	650	80	6.50	4.91	15K	045923121135	12/6
90 CRI—CEC/T20▲														
S11367*■	8G40/LED/930/CL/120V	8	120	G40	E26	CL	3000K	800	90	6.90	4.92	15K	045923113673	12/6
S11368*■	8G40/LED/930/SW/120V	8	120	G40	E26	WH	3000K	800	90	6.90	4.92	15K	045923113680	12/6

ˆ See warranty for details at www.satco.com

Product sheet SA1980

LED FILAMENT LAMPS DECORATIVE - CANDELABRA BASE/ TORPEDO SHAPE

Features:

- High lumen decorative lamps
- Filament style LED with a traditional incandescent look and feel
- 3 Year warranty

B11 FR

C11/B11 CL



360° Illumination

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
25 Watt Replacement														
S29920*	2.5W CTC/LED/27K/CL/120V	2.5	120	B11	E12	CL	2700K	200	80	3.88	1.38	15K	045923299209	24/6
40 Watt Replacement														
S9868	3.5CTF/LED/FR/27K/120V	3.5	120	B11	E12	FR	2700K	350	80	4.31	1.38	15K	045923098680	24/6
S29922*	4W CTC/LED/27K/CL/120V	4	120	B11	E12	CL	2700K	350	80	3.88	1.38	15K	045923299223	24/6
S29890*	4W CTC/LED/30K/CL/120V	4	120	B11	E12	CL	3000K	350	80	3.88	1.38	15K	045923298905	24/6
S8839*	4W CTC/LED/40K/CL/120V	4	120	B11	E12	CL	4000K	350	80	3.88	1.38	15K	045923088391	24/6
S29866*	4W CTC/LED/50K/CL/120V	4	120	B11	E12	CL	5000K	350	80	3.88	1.38	15K	045923298660	24/6
40 Watt Replacement - E14 Base														
S12115	4.5W/TORP/EURO-E14/CL/830/120V	4.5	120	B11	E14	CL	3000K	350	80	3.88	1.38	15K	045923121159	24/6
S12116	4.5W/TORP/EURO-E14/CL/840/120V	4.5	120	B11	E14	CL	4000K	350	80	3.88	1.38	15K	045923121166	24/6
S12117	4.5W/TORP/EURO-E14/FR/830/120V	4.5	120	B11	E14	FR	3000K	350	80	3.88	1.38	15K	045923121173	24/6
S12118	4.5W/TORP/EURO-E14/FR/840/120V	4.5	120	B11	E14	FR	4000K	350	80	3.88	1.38	15K	045923121180	24/6
40 Watt Replacement - 90 CRI—CEC/T20▲														
S29877*■	4.5WCTC/LED/927/120/E12	4.5	120	B11	E12	CL	2700K	350	90	3.75	1.25	15K	045923298776	24/6
S11369*	4.5CTF/LED/927/120V/E12	4.5	120	B11	E12	FR	2700K	360	90	3.70	1.38	15K	045923113697	24/6
S11370*	4.5CTC/LED/930/120V/E12	4.5	120	B11	E12	CL	3000K	360	90	3.70	1.38	15K	045923113703	24/6
60 Watt Replacement														
S9960*	5.5W CTC/LED/27K/CL/120V	5.5	120	B11	E12	CL	2700K	500	80	3.88	1.38	15K	045923099601	24/6
S9961*	5.5W CTC/LED/30K/CL/120V	5.5	120	B11	E12	CL	3000K	500	80	3.88	1.38	15K	045923099618	24/6
60 Watt Replacement - 90 CRI—CEC/T20▲														
S11371*	5.5CTC/LED/927/120V/E12	5.5	120	B11	E12	CL	2700K	500	90	3.70	1.38	15K	045923113710	24/6
S11373*	5.5CTF/LED/927/120V/E12	5.5	120	B11	E12	FR	2700K	500	90	3.70	1.38	15K	045923113734	24/6
S11372*	5.5CTC/LED/930/120V/E12	5.5	120	C11	E12	CL	3000K	500	90	3.70	1.38	15K	045923113727	24/6
75 Watt Replacement - 90 CRI—CEC/T20▲														
S11383	8W/CTC/LED/927/120V/E12	8	120	C11	E12	CL	2700K	760	90	3.86	1.38	15K	045923113833	24/6
S11384	8W/CTF/LED/927/120V/E12	8	120	C11	E12	FR	2700K	760	90	3.86	1.38	15K	045923113840	24/6
S11385	8W/CTC/LED/930/120V/E12	8	120	C11	E12	CL	3000K	760	90	3.86	1.38	15K	045923113857	24/6
40 Watt Replacement - Multi-Pks														
S21708*	4.5W CTC/LED/27K/CL/120V/3PK	4.5	120	B11	E12	CL	2700K	350	80	3.88	1.38	15K	045923217081	12-3pks
S21729*	4.5W CTC/LED/3K/CL/120V/3PK	4.5	120	B11	E12	CL	3000K	350	80	3.88	1.38	15K	045923217296	12-3pks

See www.satco.com for dimmer compatibility. ^ See warranty for details at www.satco.com

Product sheet SA2690 SA2803 SA2733

LED FILAMENT LAMPS DECORATIVE - MEDIUM BASE/TORPEDO

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures^
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified
- 3 Year warranty

C11/B11



360° Illumination

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant DIMMABLE DAMP LOCATION ^ ENCLOSED FIXTURE 360° ILLUM c UL us LISTED ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
25 Watt Replacement														
S9567	2.5W ETC/LED/27K/120V	2.5	120	B11	E26	CL	2700K	250	80	3.50	1.38	15K	045923095672	24/6
40 Watt Replacement														
S9569	4.5W ETC/LED/27K/120V	4.5	120	B11	E26	CL	2700K	470	80	3.50	1.38	15K	045923095696	24/6
60 Watt Replacement														
S9964	5.5W ETC/LED/27K/CL/120V	5.5	120	B11	E26	CL	2700K	500	80	3.50	1.38	15K	045923099649	24/6
90 CRI—CEC/T20▲														
S8551	4W ETC/LED/27K/CL/120V	4	120	B11	E26	CL	2700K	350	90+	3.50	1.38	15K	045923085512	24/6
S11375■	4.3ETF/LED/927/120V/E26	4.3	120	B11	E26	FR	2700K	350	90	3.50	1.38	15K	045923113758	24/6
S11374■	4.3ETC/LED/930/120V/E26	4.3	120	B11	E26	CL	3000K	350	90	3.50	1.38	15K	045923113741	24/6
Multi-Pks														
S21709	4.5W ETC/LED/27K/CL/120V/3PK	4.5	120	B11	E26	CL	2700K	350	80	3.88	1.38	15K	045923217098	12-3pks

See www.satco.com for dimmer compatibility.
^ See warranty for details at www.satco.com

Product sheet SA1980

LED FILAMENT LAMPS DECORATIVE-FLAME TIP CANDELABRA & MEDIUM BASE

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures^
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified
- 3 Year warranty

LED FILAMENT LAMPS DECORATIVE - CANDELABRA BASE FLAME TIP

CA11 E12



360° Illumination

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
25 Watt Replacement														
S29921*	2.5W CFC/LED/27K/CL/120V	2.5	120	CA11	E12	CL	2700K	200	80	4.69	1.38	15K	045923299216	24/6
40 Watt Replacement														
S9869	3.5CFF/LED/FR/27K/120V	3.5	120	CA11	E12	FR	2700K	350	80	5.00	1.38	15K	045923098697	24/6
S29923*	4W CFC/LED/27K/CL/120V	4	120	CA11	E12	CL	2700K	350	80	4.69	1.38	15K	045923299230	24/6
S29891*	4W CFC/LED/30K/CL/120V	4	120	CA11	E12	CL	3000K	350	80	4.69	1.38	15K	045923298912	24/6
S8840*	4W CFC/LED/40K/CL/120V	4	120	CA11	E12	CL	4000K	350	80	4.69	1.38	15K	045923088407	24/6
S29867*	4W CFC/LED/50K/CL/120V	4	120	CA11	E12	CL	5000K	350	80	4.69	1.38	15K	045923298677	24/6
60 Watt Replacement														
S9962*	5.5W CFC/LED/27K/CL/120V	5.5	120	CA11	E12	CL	2700K	500	80	4.69	1.38	15K	045923099625	24/6
S9963*	5.5W CFC/LED/30K/CL/120V	5.5	120	CA11	E12	CL	3000K	500	80	4.69	1.38	15K	045923099632	24/6
40 Watt Replacement - 90 CRI—CEC/T20▲														
S8552*	4.5W CFC/LED/27K/CL/120V	4.5	120	CA11	E12	CL	2700K	350	90	4.69	1.38	15K	045923085529	24/6
S11376*	4.5CFC/LED/930/120V/E12	4.5	120	CA11	E12	CL	3000K	360	90	3.90	1.26	15K	045923113765	24/6
S11377*	4.5CFF/LED/930/120V/E12	4.5	120	CA11	E12	FR	3000K	360	90	3.90	1.26	15K	045923113772	24/6

^ See warranty for details at www.satco.com

Product sheet SA1980

LED FILAMENT LAMPS DECORATIVE - MEDIUM BASE FLAME TIP

CA11 E26



360° Illumination

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
25 Watt Replacement														
S9571	2.5W EFC/LED/27K/120V	2.5	120	CA11	E26	CL	2700K	250	80	4.31	1.38	15K	045923095719	24/6
60 Watt Replacement														
S9965	5.5W EFC/LED/27K/CL/120V	5.5	120	CA11	E26	CL	2700K	500	80	4.31	1.38	15K	045923099656	24/6

^ See warranty for details at www.satco.com

LED FILAMENT LAMPS

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures ^
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified
- 3 Year warranty

S14
†Non-dimmable

T6

BT15

ST19

T10 / 5″

T9 / 12″

S8021

S8022

S8023

S8024

S8025

S8026

T7

BT15

ST19

T6

T9 / 5″

LED String Light Replacement Lamps Sold in 4 Packs

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant 360° ILLUM DIMMABLE ^ ENCLOSED FIXTURE § WET LOCATION DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9807§†	1WS14/LED/CL/27K/120V/ND	1	120	S14	E26	CL	2700K	100	80	3.31	1.75	15K	045923098079	24/12
S9575	4.5BT15/CL/LED/E26/27K/120V	4.5	120	BT15	E26	CL	2700K	450	80	4.13	1.88	15K	045923095757	24/6
S9576	6.5BT15/CL/LED/E26/27K/120V	6.5	120	BT15	E26	CL	2700K	810	80	4.13	1.88	15K	045923095764	24/6
S9581	7ST19/CL/LED/E26/27K/120V	7	120	ST19	E26	CL	2700K	810	80	5.50	2.38	15K	045923095818	24/6
S9895	7ST19/CL/LED/E26/30K/120V	7	120	ST19	E26	CL	3000K	810	80	5.50	2.38	15K	045923098956	24/6
S8851	6.5ST19/CL/LED/E26/40K/120V	6.5	120	ST19	E26	CL	4000K	810	80	5.50	2.38	15K	045923088513	24/6
BT15 90 CRI—CEC/T20▲														
S8559*■	5.5BT15/LED/E26/27K/120V	5.5	120	BT15	E26	CL	2700K	500	90	3.63	1.88	15K	045923085598	24/6
S11378■	8BT15/LED/927/CL/120V	8	120	BT15	E26	CL	2700K	800	90	4.30	1.81	15K	045923113789	24/6
S11379■	8BT15/LED/927/SW/120V	8	120	BT15	E26	SW	2700K	800	90	4.30	1.81	15K	045923113796	24/6
ST19 90 CRI—CEC/T20▲														
S8554*	5.5ST19/CL/LED/E26/27K/120V	5.5	120	ST19	E26	CL	2700K	500	90+	5.50	2.38	15K	045923085543	24/6
S11382■	8ST19/LED/930/CL/120V	8	120	ST19	E26	CL	3000K	800	90	4.90	2.28	15K	045923113826	24/6
Tubular LED Filament														
S9872	2.5T6/LED/CL/27K/E12/120V	2.5	120	T6	E12	CL	2700K	200	80	3.19	0.88	15K	045923098727	24/6
S8555*	2.5T6/LED/CL/27K/E12/120V	2.5	120	T6	E12	CL	2700K	180	90	3.19	0.75	15K	045923085550	24/6
S12114†	3.5T7/LED/CL/E17/3K/120V/CD	3.5	120	T7	E17	CL	3000K	350	80	2.68	1.00	15K	045923121142	100/10
S8556*	4T10/LED/E26/27K/120V	4	120	T10	E26	CL	2700K	350	90	5.00	1.25	15K	045923085567	24/6
S11381*■	4.3T10/LED/930/CL/120V	4.3	120	T10	E26	CL	3000K	350	90	5.30	1.25	15K	045923113819	24/6
S9580	4.5T10/LED/E26/27K/120V	4.5	120	T10	E26	CL	2700K	430	80	5.00	1.25	15K	045923095801	24/6
S9892	5T10/LED/E26/30K/120V	5	120	T10	E26	CL	3000K	430	80	5.00	1.25	15K	045923098925	24/6
S8841	4.5T10/LED/E26/40K/120V	4.5	120	T10	E26	CL	4000K	450	80	5.00	1.25	15K	045923088414	24/6
S9582	6.5T9/CL/LED/E26/27K/120V	6.5	120	T9	E26	CL	2700K	800	80	12.00	1.13	15K	045923095825	24/6
S11380■	8T9/LED/927/CL/120V	8	120	T9	E26	CL	2700K	800	90	5.00	1.14	15K	045923113802	24/6
LED String Light Replacement Lamps														
S8021†	1W S14 REPLACEMENT LAMPS/4PK	1	120	S14	E26	CL	2700K	100	80	3.43	1.81	15K	045923080210	24/4
S8022†	1W/LED/S14/RED/120V/ND/4PK	1	120	S14	E26	RED	N/A	40	N/A	3.43	1.81	15K	045923080227	24/4
S8023†	1W/LED/S14/BLUE/120V/ND/4PK	1	120	S14	E26	BLUE	N/A	15	N/A	3.43	1.81	15K	045923080234	24/4
S8024†	1W/LED/S14/GREEN/120V/ND/4PK	1	120	S14	E26	GRN	N/A	30	N/A	3.43	1.81	15K	045923080241	24/4
S8025†	1W/LED/S14/YELLOW/120V/ND/4PK	1	120	S14	E26	YLW	N/A	120	N/A	3.43	1.81	15K	045923080258	24/4
S8026†	1W/LED/S14/ORANGE/120V/ND/4PK	1	120	S14	E26	ORNG	N/A	90	N/A	3.43	1.81	15K	045923080265	24/4

†Non-Dimmable
^ See warranty for details at www.satco.com

Product sheet SA1980, SA2735, SA2719

LED FILAMENT LAMPS
VINTAGE STYLE

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures^
- c-UL-us listed
- CEC T20/T24 Available
- 3 Year warranty

A19

G25

S9585
ST19

T9

T6

S9986
C11/E12

S9987
CA11/E12

S9577, S9578,
S9579
ST19



Beam Angle: 360°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
ST19														
S9577	2.5ST19/AMB/LED/E26/20K/120V	2.5	120	ST19	E26	TR AMB	2000K	220	80	5.38	2.38	15K	045923095771	24/6
S9578	4.5ST19/AMB/LED/E26/20K/120V	4.5	120	ST19	E26	TR AMB	2000K	380	80	5.38	2.38	15K	045923095788	24/6
S9579	6.5ST19/AMB/LED/E26/20K/120V	6.5	120	ST19	E26	TR AMB	2000K	650	80	5.38	2.38	15K	045923095795	24/6
S9585	4.5ST19/AMB/LED/E26/20K/120V	4.5	120	ST19	E26	TR AMB	2000K	380	80	5.50	2.38	15K	045923095856	24/6
A19														
S9583	4.5A19/AMB/LED/E26/20K/120V	4.5	120	A19	E26	TR AMB	2000K	380	80	4.13	2.38	15K	045923095832	24/6
G25														
S9584	4.5G25/AMB/LED/E26/20K/120V	4.5	120	G25	E26	TR AMB	2000K	380	80	4.38	3.25	15K	045923095849	24/6
T9														
S9588	6.5T9/AMB/LED/E26/20K/120V	6.5	120	T9	E26	TR AMB	2000K	620	80	12.00	1.13	15K	045923095887	24/6
T6														
S9873	2.5T6/LED/AMB/20K/E12/120V	2.5	120	T6	E12	TR AMB	2000K	150	80	3.19	0.75	15K	045923098734	24/6
C11														
S9986	3.5CTA/LED/AMB/20K/120V	3.5	120	C11	E12	TR AMB	2000K	300	80	4.31	1.38	15K	045923099861	24/6
CA11														
S9987	3.5CFA/LED/AMB/20K/120V	3.5	120	CA11	E12	TR AMB	2000K	300	80	5.00	1.13	15K	045923099878	24/6

^ See warranty for details at www.satco.com

Product sheet SA1980

DECORATIVE SPIRAL LED FILAMENT LAMPS

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures^
- c-UL-us listed
- 3 Year warranty

B10 ST19 G40 G30 A19 T9



Beam Angle: 360°

360° BEAM | DIMMABLE | ENCLOSED FIXTURE ^ | DAMP LOCATION | c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
ST19														
S9967	4.5ST19/SPIRAL/LED/AMB/120V	4.5	120	ST19	E26	TR AMB	2000K	240	80	5.25	2.38	15K	045923099670	24/6
A19														
S9966	4.5A19/SPIRAL/LED/AMB/120V	4.5	120	A19	E26	TR AMB	2000K	220	80	4.00	2.38	15K	045923099663	24/6
G30														
S9968	4.5G30/SPIRAL/LED/AMB/120V	4.5	120	G30	E26	TR AMB	2000K	240	80	5.44	3.75	15K	045923099687	24/6
G40														
S9969	4.5G40/SPIRAL/LED/AMB/120V	4.5	120	G40	E26	TR AMB	2000K	240	80	6.63	4.94	15K	045923099694	12/6
T9														
S9971	4.5T9/SPIRAL/LED/AMB/120V	4.5	120	T9	E26	TR AMB	2000K	240	80	7.19	1.13	15K	045923099717	24/6
B10														
S9970	2.3ETC/SPIRAL/LED/AMB/120V	2.3	120	B10	E26	TR AMB	2000K	90	80	3.50	1.38	15K	045923099700	24/6

^ See warranty for details at www.satco.com

Product sheet SA1980

LED SPIRAL FILAMENT VINTAGE-STYLE LAMPS IN HID ENVELOPES

Features:

- Uses only 4 watts
- Impressive size & presence
- Omni-directional light source
- Perfect for pendant fixtures & hanging sockets
- Approved for totally enclosed fixtures^
- Dimmable
- T24, BT38, BT56 & PS52 shapes
- E26 base
- 3 Year warranty

S22432
BT56

S22430
T24

S22433
PS52

S22431
BT38



Beam Angle: 360°

360° BEAM | DIMMABLE | ^ ENCLOSED FIXTURE | WET LOCATION | c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S22430	4T24/LED/CL/E26/VINTAGE/120V	4	120	T24	E26	CL	2150K	200	90	13.00	3.00	25K	045923224300	12/1
S22431	4BT38/LED/CL/E26/VINTAGE/120V	4	120	BT38	E26	CL	2150K	200	90	16.50	4.69	25K	045923224317	12/1
S22432	4BT56/LED/CL/E26/VINTAGE/120V	4	120	BT56	E26	CL	2150K	200	90	13.81	7.13	25K	045923224324	6/1
S22433	4PS52/LED/CL/E26/VINTAGE/120V	4	120	PS52	E26	CL	2150K	200	90	11.81	6.31	25K	045923224331	6/1

^ See warranty for details at www.satco.com

Product sheet SA2298

LED FILAMENT LAMPS - CARDED

Features:

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures ^
- c-UL-us listed
- ENERGY STAR certified*
- 3 Year warranty

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
A15														
S21710	5.5A15/LED/27K/CL/E12/120V/2CD	5.5	120	A15	E12	CL	2700K	450	80	3.63	1.88	15K	045923217104	12/2 cd
S21733*	5A15/LED/WH/27K/E26/120V/2CD	5	120	A15	E26	WH	2700K	450	80	3.63	1.97	15K	045923217333	12/2 cd
S21711*	5A15/LED/27K/CL/E26/120V/2CD	5.5	120	A15	E26	CL	2700K	450	80	3.63	1.88	15K	045923217111	12/2 cd
A19														
S8616*	7A19/CL/LED/E26/27K/ES/120V	7	120	A19	E26	CL	2700K	800	80	4.13	2.38	15K	045923086168	12/1 cd
C7														
S11308	0.7W/C7/CL/LED/120V/2CD	0.7	120	C7	E12	CL	2700K	30	80	2.13	0.84	15K	045923113086	12/2 cd
Decorative - Torpedo Shape - Candelabra Base														
S21700*	2.5W CTC/LED/27K/CL/120V/2CD	2.5	120	B11	E12	CL	2700K	180	80	3.88	1.38	15K	045923217005	12/2 cd
S28613*	4W CTC/LED/27K/CL/120V	4	120	C11	E12	CL	2700K	350	80	3.88	1.38	15K	045923286131	12/1 cd
S21702*	4.5W CTC/LED/27K/CL/120V/2CD	4.5	120	B11	E12	CL	2700K	350	80	3.88	1.38	15K	045923217029	12/2 cd
S21704*	4.5W CTF/LED/27K/FR/120V/2CD	4.5	120	B11	E12	FR	2700K	330	80	3.88	1.38	15K	045923217043	12/2 cd
S21728*	4.5W CTC/LED/5K/CL/120V/2CD	4.5	120	B11	E12	CL	5000K	350	80	3.88	1.38	15K	045923217289	12/2 cd
S21706	5.5W CTC/LED/27K/CL/120V/2CD	5.5	120	B11	E12	CL	2700K	500	80	3.88	1.38	15K	045923217067	12/2 cd
Decorative - Torpedo Shape - Medium Base														
S21701*	2.5W ETC/LED/27K/CL/120V/2CD	2.5	120	B11	E26	CL	2700K	180	80	3.88	1.38	15K	045923217012	12/2 cd
S21703*	4.5W ETC/LED/27K/CL/120V/2CD	4.5	120	B11	E26	CL	2700K	350	80	3.88	1.38	15K	045923217036	12/2 cd
S8609*	4.5W ETC/LED/27K/120V	4.5	120	C11	E26	CL	2700K	450	80	3.50	1.38	15K	045923086090	12/1 cd
S21705*	4.5W ETF/LED/27K/FR/120V/2CD	4.5	120	B11	E26	FR	2700K	330	80	3.88	1.38	15K	045923217050	12/2 cd
S21730*	4.5W ETC/LED/5K/CL/120V/2CD	4.5	120	B11	E26	CL	5000K	350	80	3.88	1.38	15K	045923217302	12/2 cd
S21707*	5.5W ETC/LED/27K/CL/120V/2CD	5.5	120	B11	E26	CL	2700K	500	80	3.88	1.38	15K	045923217074	12/2 cd
Decorative - Flame Tip - Candelabra Base														
S21720*	2.5W CFC/LED/27K/CL/120V/2CD	2.5	120	CA10	E12	CL	2700K	180	80	3.88	1.38	15K	045923217203	12/2 cd
S28614*	4W CFC/LED/27K/CL/120V	4	120	CA11	E12	CL	2700K	350	80	4.69	1.38	15K	045923286148	12/1 cd
S21721*	4.5W CFC/LED/27K/CL/120V/2CD	4.5	120	CA10	E12	CL	2700K	350	80	3.88	1.38	15K	045923217210	12/2 cd
S21732*	4.5W CFF/LED/27K/FR/120V/2CD	4.5	120	CA10	E12	FR	2700K	350	80	3.88	1.38	15K	045923217326	12/2 cd
S21722*	4.5W CFC/LED/5K/CL/120V/2CD	4.5	120	CA10	E12	CL	5000K	350	80	3.88	1.38	15K	045923217227	12/2 cd
S21723*	5.5W CFC/LED/27K/CL/120V/2CD	5.5	120	CA10	E12	CL	2700K	500	80	3.88	1.38	15K	045923217234	12/2 cd
Decorative - Flame Tip - Medium Base														
S21724*	2.5W EFC/LED/27K/CL/120V/2CD	2.5	120	CA10	E26	CL	2700K	180	80	3.88	1.38	15K	045923217241	12/2 cd
S21725*	4.5W EFC/LED/27K/CL/120V/2CD	4.5	120	CA10	E26	CL	2700K	350	80	3.88	1.38	15K	045923217258	12/2 cd
S21731*	4.5W EFF/LED/27K/FR/120V/2CD	4.5	120	CA10	E26	FR	2700K	350	80	3.88	1.38	15K	045923217319	12/2 cd
S21726*	4.5W EFC/LED/5K/CL/120V/2CD	4.5	120	CA10	E26	CL	5000K	350	80	3.88	1.38	15K	045923217265	12/2 cd
S8610*	4.5W EFC/LED/27K/120V	4.5	120	CA11	E26	CL	2700K	450	80	4.31	1.38	15K	045923086106	12/1 cd
S21727*	5.5W EFC/LED/27K/CL/120V/2CD	5.5	120	CA10	E26	CL	2700K	500	80	3.88	1.38	15K	045923217272	12/2 cd
G16														
S21735*	4.5G16.5/LED/C/27/E12/120V/2PK	4.5	120	G16 1/2	E12	CL	2700K	350	80	3.24	2.00	15K	045923217357	12/2 cd
S21736*	5.5G16.5/LED/C/27/E12/120V/2PK	5.5	120	G16 1/2	E12	CL	2700K	500	80	3.24	2.00	15K	045923217364	12/2 cd
ST19														
S8612	4.5ST19/AMB/LED/E26/20K/120V	4.5	120	ST19	E26	TR AMB	2000K	380	80	5.50	2.38	15K	045923086120	12/1 cd
S8611	6.5ST19/CL/LED/E26/27K/120V	6.5	120	ST19	E26	CL	2700K	810	80	5.50	2.38	15K	045923086113	12/1 cd

^ See warranty for details at www.satco.com

Product sheet SA2607

SATCO-ESCENT LED LAMPS

Features:

- 2 Watt LED direct replacement for 25 watt incandescent lamps
- 4 Watt LED direct replacement for 40 watt incandescent lamps
- Unique satin-spun white or amber finish
- Dimmable
- Carded versions for peg board merchandising
- LED filament technology
- Approved for totally enclosed fixtures^
- Long life—15,000 hours
- 3 Year warranty

S23403,
S22703

S11300, S11302,
S11304, S11306

S23413,
S22713

Satin Finish

S23407,
S22707

S11301, S11303,
S11305, S11307

S23412,
S22712

Amber Finish



360° Illumination

DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Boxed														
S11300	2CA11/LED/SA/E12/27K/120V	2	120	CA11	E12	SPUN STN	2700K	150	80	4.00	1.38	15K	045923113000	24/6
S11301	2CA11/LED/A/E12/21K/120V	2	120	CA11	E12	SPUN AMB	2100K	100	80	4.00	1.38	15K	045923113017	24/6
S11302	4CA11/LED/SA/E12/27K/120V	4	120	CA11	E12	SPUN STN	2700K	300	80	4.00	1.38	15K	045923113024	24/6
S11303	4CA11/LED/A/E12/21K/120V	4	120	CA11	E12	SPUN AMB	2100K	200	80	4.00	1.38	15K	045923113031	24/6
S23403	2C11/LED/SA/E26/27K/120V	2	120	C11	E26	SPUN STN	2700K	120	80	3.81	1.38	15K	045923234033	24/6
S23407	2C11/LED/A/E26/21K/120V	2	120	C11	E26	SPUN AMB	2100K	100	80	3.81	1.38	15K	045923234071	24/6
S23413	4C15/LED/SA/E26/27K/120V	4	120	C15	E26	SPUN STN	2700K	300	80	4.38	1.88	15K	045923234132	24/6
S23412	4C15/LED/A/E26/21K/120V	4	120	C15	E26	SPUN AMB	2100K	240	80	4.38	1.88	15K	045923234125	24/6
Carded														
S11304	2CA11/LED/SA/E12/27K/120V/CD	2	120	CA11	E12	SPUN STN	2700K	150	80	4.00	1.38	15K	045923113048	24/12
S11305	2CA11/LED/A/E12/21K/120V/CD	2	120	CA11	E12	SPUN AMB	2100K	100	80	4.00	1.38	15K	045923113055	24/12
S11306	4CA11/LED/SA/E12/27K/120V/CD	4	120	CA11	E12	SPUN STN	2700K	300	80	4.00	1.38	15K	045923113062	24/12
S11307	4CA11/LED/A/E12/21K/120V/CD	4	120	CA11	E12	SPUN AMB	2100K	200	80	4.00	1.38	15K	045923113079	24/12
S22703	2C11/LED/SA/E26/27K/120V/CD	2	120	C11	E26	SPUN STN	2700K	120	80	3.81	1.38	15K	045923227035	24/12
S22707	2C11/LED/A/E26/21K/120V/CD	2	120	C11	E26	SPUN AMB	2100K	100	80	3.81	1.38	15K	045923227073	24/12
S22713	4C15/LED/SA/E26/27K/120V/CD	4	120	C15	E26	SPUN STN	2700K	300	80	4.38	1.88	15K	045923227134	24/12
S22712	4C15/LED/A/E26/21K/120V/CD	4	120	C15	E26	SPUN AMB	2100K	240	80	4.38	1.88	15K	045923227127	24/12

^ See warranty for details at www.satco.com

Product sheet SA2320

SPECIALTY LED LAMPS

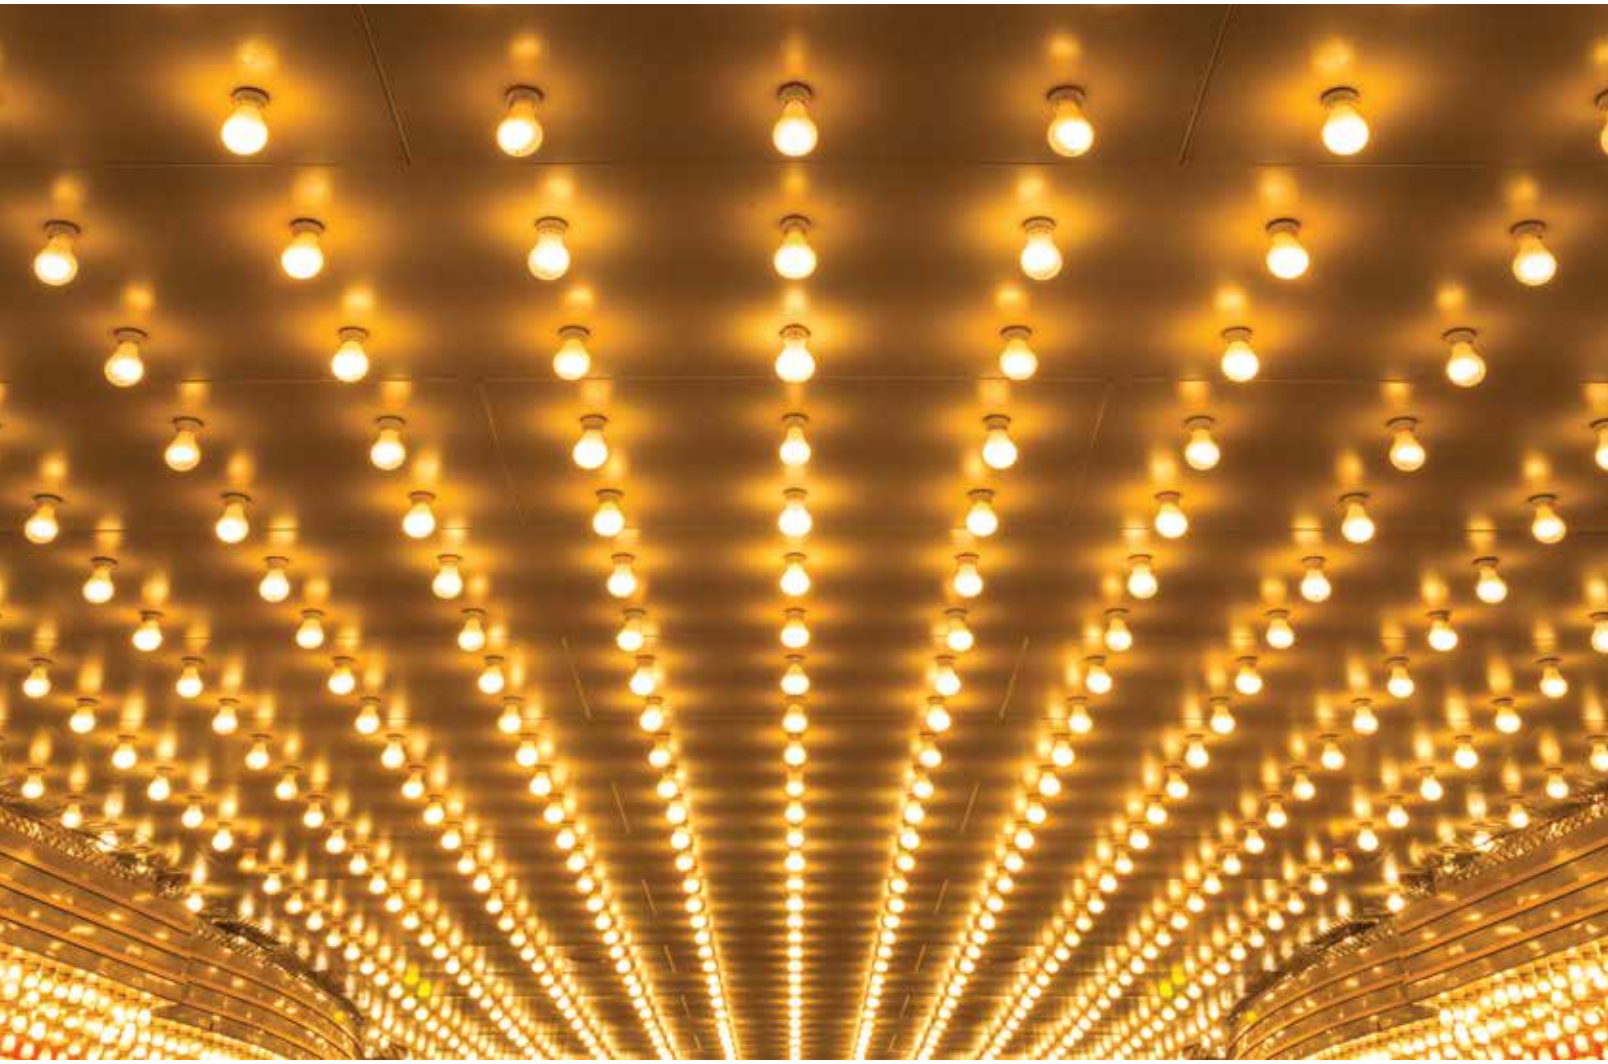

Features:

- Non-dimmable
- Direct replacements for incandescent & specialty lamps
- LED replacements use 80% less energy
- Wet location
- Long life—25,000 hours
- 3 Year warranty

Applications:

- Sign bulbs
- Indicator
- Nightlights
- Decorative lamps

T6

C7

S11

Decorative

S11

G16

A15

S14



360° Illumination

c UL u LISTED

WET LOCATION

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9150	1.4W A15/CL/LED/120V/CD	1.4	120	A15	E26	CL	2700K	36	80	3.31	1.88	25K	045923091506	48/12
S9151	1.4W A15/WH/LED/120V/CD	1.4	120	A15	E26	CTD WH	2700K	45	80	3.31	1.94	25K	045923091513	48/12
S9152	1W CTC/LED/120V/CD	1	120	BA9 1/2	E12	CL	2700K	25	80	3.63	1.25	25K	045923091520	48/12
S9153	1W CFC/LED/120V/CD	1	120	CA8	E12	CL	2700K	25	80	3.88	1.25	25K	045923091537	48/12
S9154	1.4W ETC/LED/120V/CD	1.4	120	B11	E26	CL	2700K	36	80	3.81	1.38	25K	045923091544	48/12
S9155	1W CTD/LED/CRYSTAL/120V/CD	1	120	BA9 1/2	E12	Crystal	2700K	45	80+	3.63	1.25	25K	045923091551	48/12
S9156	0.5W C7/CL/LED/120V/CD	0.5	120	C7	E12	CL	2700K	14	80	2.13	0.84	25K	045923091568	48/12
S9157	0.5W C7/WH/LED/120V/CD	0.5	120	C7	E12	CTD WH	2700K	14	80	2.13	0.84	25K	045923091575	48/12
S9158	1.4W G16.5/CL/LED/120V/CD E26	1.4	120	G16 1/2	E26	CL	2700K	36	80	2.75	2.06	25K	045923091582	48/12
S9159	1.4W G16.5/WH/LED/120V/CD E26	1.4	120	G16 1/2	E26	CTD WH	2700K	45	80	2.81	2.06	25K	045923091599	48/12
S9160	1.2W S11/CL/LED/120V/CD	1.2	120	S11	E26	CL	2700K	32	80	2.31	1.38	25K	045923091605	48/12
S9161	1.2W S11/WH/LED/120V/CD	1.2	120	S11	E26	CTD WH	2700K	40	75	2.31	1.38	25K	045923091612	48/12
S9162	1.2W S11/BL/LED/120V/CD	1.2	120	S11	E26	CER BLUE	-	-	-	2.31	1.38	25K	045923091629	48/12
S9163	1.2W S11/GR/LED/120V/CD	1.2	120	S11	E26	CER GRN	-	-	-	2.31	1.38	25K	045923091636	48/12
S9164	1.2W S11/OR/LED/120V/CD	1.2	120	S11	E26	CER ORNG	-	-	-	2.31	1.38	25K	045923091643	48/12
S9165	1.2W S11/RED/LED/120V/CD	1.2	120	S11	E26	CER RED	-	-	-	2.31	1.38	25K	045923091650	48/12
S9166	1.2W S11/Y/LED/120V/CD	1.2	120	S11	E26	CER YLW	-	-	-	2.31	1.38	25K	045923091667	48/12
S9167	1.0W S11/CL/LED/E17/120V/CD	1	120	S11	E17	CL	2700K	28	80	2.25	1.38	25K	045923091674	48/12
S9168	1.0W S11/WH/LED/E17/120V/CD	1	120	S11	E17	CTD WH	2700K	35	80	2.25	1.38	25K	045923091681	48/12
S9169	1.4W S14/Y/LED/120V/CD	1.4	120	S14	E26	CER YLW	-	-	-	3.31	1.75	25K	045923091698	48/12
S9170	1.4W S14/RED/LED/120V/CD	1.4	120	S14	E26	CER RED	-	-	-	3.31	1.75	25K	045923091704	48/12
S9171	1.4W S14/GR/LED/120V/CD	1.4	120	S14	E26	CER GRN	-	-	-	3.31	1.75	25K	045923091711	48/12
S9172	1.4W S14/BL/LED/120V/CD	1.4	120	S14	E26	CER BLUE	-	-	-	3.31	1.75	25K	045923091728	48/12
S9173	1.4W S14/OR/LED/120V/CD	1.4	120	S14	E26	CER ORNG	-	-	-	3.31	1.75	25K	045923091735	48/12
S9174	1.4W S14/CL/LED/120V/CD	1.4	120	S14	E26	CL	2700K	36	80	3.31	1.75	25K	045923091742	48/12
S9175	1.4W S14/WH/LED/120V/CD	1.4	120	S14	E26	CTD WH	2700K	45	80	3.31	1.75	25K	045923091759	48/12
S9176	0.8W T6/FR/LED/120V/CD	0.8	120	T6	E12	CTD WH	2700K	25	80	2.06	0.75	25K	045923091766	48/12
S9177	0.8W T6/CL/LED/120V/CD	0.8	120	T6	E12	CL	2700K	20	80	2.06	0.75	25K	045923091773	48/12

Product sheet S1529

40W REPLACEMENT LED A15 LAMPS

Features:

- Direct replacement for 40 Watt A15 incandescent lamps, uses only 5.5 Watts
- Indoor residential and commercial lighting
- Dimmable
- 2700K, 3000K, 4000K and 5000K options
- Damp location rated
- Approved for totally enclosed fixtures ^
- Long life—25,000 hours
- ENERGY STAR certified*
- 5 Year warranty

E17 Base

E26 Base



Beam Angle: 230°

CEILING FAN | DIMMABLE ^ | ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED * | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9030*	5.5A15/LED/2700K/120V	5.5	120	A15	E26	FR	2700K	450	80	3.47	1.88	25K	045923090301	24/6
S9031*	5.5A15/LED/3000K/120V	5.5	120	A15	E26	FR	3000K	450	80	3.47	1.88	25K	045923090318	24/6
S9032*	5.5A15/LED/4000K/120V	5.5	120	A15	E26	FR	4000K	450	80	3.47	1.88	25K	045923090325	24/6
S9033*	5.5A15/LED/5000K/120V	5.5	120	A15	E26	FR	5000K	450	80	3.47	1.88	25K	045923090332	24/6
S9064	5.5A15/LED/2700K/E17/120V	5.5	120	A15	E17	FR	2700K	450	80	3.5	1.88	25K	045923090646	24/6
S9065	5.5A15/LED/3000K/E17/120V	5.5	120	A15	E17	FR	3000K	450	80	3.5	1.88	25K	045923090653	24/6
S9067	5.5A15/LED/4000K/E17/120V	5.5	120	A15	E17	FR	4000K	450	80	3.5	1.88	25K	045923090677	24/6
S9068	5.5A15/LED/5000K/E17/120V	5.5	120	A15	E17	FR	5000K	450	80	3.5	1.88	25K	045923090684	24/6
90 CRI—CEC/T20														
S8572*	5A15/LED/2700K/120V	5	120	A15	E26	FR	2700K	450	90	3.5	1.88	25K	045923085727	24/6
S8573*	5A15/LED/3000K/120V	5	120	A15	E26	FR	3000K	450	90	3.5	1.88	25K	045923085734	24/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2267

40W REPLACEMENT LED A19 LAMPS

Features:

- Direct replacement for 40 Watt incandescent lamps or 9 Watt CFL, uses only 5.8 Watts
- Residential and commercial lighting
- 2700K, 3000K, 4000K & 5000K options
- Damp location
- 10,000 to 25,000 Hours
- Dimmable & non-dimmable
- Approved for enclosed fixtures ^
- 3-5 Year warranty



Beam Angle: 220°

▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S29830*	6A19/OMNI/220/LED/27K	6	120	A19	E26	WH	2700K	480	80	4.31	2.38	25K	045923298301	24/6
S29831*	6A19/OMNI/220/LED/30K	6	120	A19	E26	WH	3000K	480	80	4.31	2.38	25K	045923298318	24/6
S29832*	6A19/OMNI/220/LED/35K	6	120	A19	E26	WH	3500K	480	80	4.31	2.38	25K	045923298325	24/6
S29833*	6A19/OMNI/220/LED/40K	6	120	A19	E26	WH	4000K	480	80	4.31	2.38	25K	045923298332	24/6
S29834*	9.8A19/LED/27K/120V/ECO/ND	6	120	A19	E26	WH	5000K	480	80	4.31	2.38	25K	045923298349	24/6
Non-Dimmable														
S11402	5.8A19/LED/27K/120V/ECO/ND	5.8	120	A19	E26	WH	2700K	450	80	4.31	2.38	10K	045923114021	24/6
S11403	5.8A19/LED/30K/120V/ECO/ND	5.8	120	A19	E26	WH	3000K	450	80	4.31	2.38	10K	045923114038	24/6
S11404	5.8A19/LED/40K/120V/ECO/ND	5.8	120	A19	E26	WH	4000K	450	80	4.31	2.38	10K	045923114045	24/6
S11405	5.8A19/LED/50K/120V/ECO/ND	5.8	120	A19	E26	WH	5000K	450	80	4.31	2.38	10K	045923114052	24/6
S9590*	6A19/LED/2700K/120V	6	120	A19	E26	WH	2700K	480	80	4.31	2.38	15K	045923095900	24/6
S9591*	6A19/LED/3000K/120V	6	120	A19	E26	WH	3000K	480	80	4.31	2.38	15K	045923095917	24/6
S9592*	6A19/LED/5000K/120V	6	120	A19	E26	WH	5000K	480	80	4.31	2.38	15K	045923095924	24/6
90 CRI - CEC/T20 - Dimmable▲														
S11320*	5.5A19/LED/927/120V/D	5.5	120	A19	E26	WH	2700K	450	90	4.33	2.36	25K	045923113208	24/6
S11321*	5.5A19/LED/930/120V/D	5.5	120	A19	E26	WH	3000K	450	90	4.33	2.36	25K	045923113215	24/6
90 CRI - CEC/T20 - Non-Dimmable▲														
S28557*	5.5A19/LED/927/120V/ND/4PK	5.5	120	A19	E26	WH	2700K	450	90	4.33	2.36	15K	045923285578	12-4Pks
S28558*	5.5A19/LED/930/120V/ND/4PK	5.5	120	A19	E26	WH	3000K	450	90	4.33	2.36	15K	045923285585	12-4Pks
S28593*	5.5A19/LED/940/120V/ND/4PK	5.5	120	A19	E26	WH	4000K	450	90	4.33	2.36	15K	045923285936	12-4Pks
S28594*	5.5A19/LED/950/120V/ND/4PK	5.5	120	A19	E26	WH	5000K	450	90	4.33	2.36	15K	045923285943	12-4Pks

4-packs must be ordered in full cases only. ^ See warranty for details at www.satco.com

Product sheet SA2648

60W REPLACEMENT LED A19 LAMPS

Features:

- Indoor residential and commercial lighting
- Innovative design–smooth heat sink design to resemble traditional incandescent lamp
- 2700K, 3000K, 3500K, 4000K & 5000K options
- Damp location
- Dimmable and non-dimmable options
- Approved for totally enclosed fixtures^
- E26 & GU24 base options
- CEC/T20 Compliant options available
- Long life—up to 25,000 hours
- ENERGY STAR certified*
- 3 Year warranty—10,000-15,000 hours
- 5 Year warranty—25,000 hours



Beam Angle: 220°

DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL LISTED us * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S29835*	9.8A19/OMNI/220/LED/27K	9.8	120	A19	E26	FR WH	2700K	800	80	4.31	2.38	25K	045923298356	24/6
S29836*	9.8A19/OMNI/220/LED/30K	9.8	120	A19	E26	FR WH	3000K	800	80	4.31	2.38	25K	045923298363	24/6
S29837*	9.8A19/OMNI/220/LED/35K	9.8	120	A19	E26	FR WH	3500K	800	80	4.31	2.38	25K	045923298370	24/6
S29838*	9.8A19/OMNI/220/LED/40K	9.8	120	A19	E26	FR WH	4000K	800	80	4.31	2.38	25K	045923298387	24/6
S29839*	9.8A19/OMNI/220/LED/50K	9.8	120	A19	E26	FR WH	5000K	800	80	4.31	2.38	25K	045923298394	24/6
S29840*	9.8A19/OMNI/220/LED/27K/GU24	9.8	120	A19	GU24	FR WH	2700K	800	80	4.31	2.38	25K	045923298400	24/6
S29844*	9.8A19/OMNI/220/LED/30K/GU24	9.8	120	A19	GU24	FR WH	3000K	800	80	4.31	2.38	25K	045923298448	24/6
S29841*	9.8A19/OMNI/220/LED/35K/GU24	9.8	120	A19	GU24	FR WH	3500K	800	80	4.31	2.38	25K	045923298417	24/6
S29842*	9.8A19/OMNI/220/LED/40K/GU24	9.8	120	A19	GU24	FR WH	4000K	800	80	4.31	2.38	25K	045923298424	24/6
S29843	9.8A19/OMNI/220/LED/50K/GU24	9.8	120	A19	GU24	FR WH	5000K	800	80	4.31	2.38	25K	045923298431	24/6
90 CRI														
S9703*	10A19/OMNI/LED/27K/90CRI	10	120	A19	E26	FR WH	2700K	800	90+	4.31	2.38	25K	045923097034	24/6
S9704*	10A19/OMNI/LED/3K/90CRI	10	120	A19	E26	FR WH	3000K	800	90+	4.31	2.38	25K	045923097041	24/6
S8480	10A19/LED/4K/90CRI	10	120	A19	E26	FR WH	4000K	800	90	4.34	2.38	25K	045923084805	24/6
S8481	10A19/LED/5K/90CRI	10	120	A19	E26	FR WH	5000K	800	90	4.31	2.38	25K	045923084812	24/6
S9707*	10A19/OMNI/LED/27K/90CRI/GU24	10	120	A19	GU24	FR WH	2700K	800	90+	4.31	2.38	25K	045923097072	24/6
S9708*	10A19/OMNI/LED/3K/90CRI/GU24	10	120	A19	GU24	FR WH	3000K	800	90+	4.31	2.38	25K	045923097089	24/6
S8482	10A19/LED/4K/90CRI/GU24	10	120	A19	GU24	FR WH	4000K	800	90	4.31	2.38	25K	045923084829	24/6
Non-Dimmable														
S29593*	9.5A19/LED/827/ND/120V	9.5	120	A19	E26	FR WH	2700K	800	80	4.31	2.38	15K	045923295935	24/6
S9594*	9.5A19/LED/3000K/ND/120V	9.5	120	A19	E26	FR WH	3000K	800	80	4.31	2.38	15K	045923095948	24/6
S29595*	9.5A19/LED/850/ND/120V	9.5	120	A19	E26	FR WH	5000K	800	80	4.31	2.38	15K	045923295959	24/6
S11406	9.8A19/LED/27K/120V/ECO/ND	9.8	120	A19	E26	FR WH	2700K	800	80	4.34	2.38	10K	045923114069	24/6
S11407	9.8A19/LED/30K/120V/ECO/ND	9.8	120	A19	E26	FR WH	3000K	800	80	4.34	2.38	10K	045923114076	24/6
S11408	9.8A19/LED/40K/120V/ECO/ND	9.8	120	A19	E26	FR WH	4000K	800	80	4.34	2.38	10K	045923114083	24/6
S11409	9.8A19/LED/50K/120V/ECO/ND	9.8	120	A19	E26	FR WH	5000K	800	80	4.34	2.38	10K	045923114090	24/6
120-277V														
S8914*	8.5A19/LED/27K /120-277V	8.5	120-277	A19	E26	FR WH	2700K	800	80	4.31	2.38	25K	045923089145	24/6
S8915*	8.5A19/LED/30K /120-277V	8.5	120-277	A19	E26	FR WH	3000K	800	80	4.31	2.38	25K	045923089152	24/6
S8916	8.5A19/LED/40K /120-277V	8.5	120-277	A19	E26	FR WH	4000K	800	80	4.31	2.38	25K	045923089169	24/6
S8920	8.5A19/LED/50K /120-277V	8.5	120-277	A19	E26	FR WH	5000K	800	80	4.31	2.38	25K	045923089206	24/6

^ See warranty for details at www.satco.com

Product sheet SA2631

LOW VOLTAGE 9.2W LED A19 LAMPS

Features:

- 60 Watt incandescent replacement, uses only 9.2 Watts
- High efficiency—reduces drain on battery
- AC 12-24V
- DC 12-34V
- 800 Lumens
- Long life—25,000 hours
- 5 Year warranty

Applications:

- RVs and campers
- Marine applications



Beam Angle: 220°

DAMP LOCATION | 800 LUMENS | 25,000 HOURS

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S25011	9A19/LED/12-34VDC/827/ND	9	12V-34V	A19	E26	FR	2700K	800	80	4.31	2.38	25K	045923150111	24/6
S25012	9A19/LED/12-34VDC/850/ND	9	12V-34V	A19	E26	FR	5000K	800	80	4.31	2.38	25K	045923150128	24/6

^ See warranty for details at www.satco.com

Product sheet SA2806

COMMERCIAL GRADE LED A19 LAMPS

Features:

- Up to 1000 lumens
- Enhanced dimming
- Wet location
- Rough service
- Approved for totally enclosed fixtures ^



Beam Angle: 140°

DIMMABLE ^ ENCLOSED FIXTURE WET LOCATION c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11430	5A19/LED/827/AGRI/120V/D	5	120	A19	E26	FR	2700K	550	80	4.61	2.36	25K	045923114304	48/12
S11431	5A19/LED/850/AGRI/120V/D	5	120	A19	E26	FR	5000K	550	80	4.61	2.36	25K	045923114311	48/12
S11432	8.5A19/LED/827/AGRI/120V/D	8.5	120	A19	E26	FR	2700K	1000	80	4.61	2.36	25K	045923114328	48/12
S11433	8.5A19/LED/850/AGRI/120V/D	8.5	120	A19	E26	FR	5000K	1000	80	4.61	2.36	25K	045923114335	48/12

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2575

60W REPLACEMENT LED A19 2 PACKS & 4-PACKS

Features:

- Direct replacement for 60 Watt replacement incandescent lamps and for 13 Watt screw-in CFLs, uses only 9.5-10 Watts
- Indoor residential and commercial lighting
- 2700K, 3000K, 4000K and 5000K options
- Damp location
- Approved for totally enclosed fixtures^
- Long life—up to 15,000 hours
- ENERGY STAR certified*
- 3 Year warranty



Beam Angle: 220°

† DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL LISTED us * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable 4 Packs														
S11414†	9.5A19/LED/827/120V/D/4PK	9.5	120	A19	E26	FR	2700K	800	80	4.17	2.38	15K	045923114144	12-4pks
S11415†	9.5A19/LED/830/120V/D/4PK	9.5	120	A19	E26	FR	3000K	800	80	4.17	2.38	15K	045923114151	12-4pks
S11416†	9.5A19/LED/840/120V/D/4PK	9.5	120	A19	E26	FR	4000K	800	80	4.17	2.38	15K	045923114168	12-4pks
S11417†	9.5A19/LED/850/120V/D/4PK	9.5	120	A19	E26	FR	5000K	800	80	4.17	2.38	15K	045923114175	12-4pks
Non-Dimmable 4 Packs														
S39596*	9.5A19/LED/827/ND/120V/4PK	9.5	120	A19	E26	FR	2700K	800	80	4.33	2.36	15K	045923395963	12-4pks
S29589*	9.5A19/LED/830K/ND/120V/4PK	9.5	120	A19	E26	FR	3000K	800	80	4.31	2.38	15K	045923295898	12-4pks
S29558*	9.5A19/LED/840K/ND/120V/4PK	9.5	120	A19	E26	FR	4000K	800	80	4.31	2.38	15K	045923295584	12-4pks
S39597*	9.5A19/LED/850/ND/120V/4PK	9.5	120	A19	E26	FR	5000K	800	80	4.33	2.36	15K	045923395970	12-4pks
Non-Dimmable 2 Packs														
S11434	9.8A19/LED/827/ECO/ND/2PK	9.8	120	A19	E26	FR	2700K	800	80	4.34	2.38	10K	045923114342	24-2pks
S11435	9.8A19/LED/850/ECO/ND/2PK	9.8	120	A19	E26	FR	5000K	800	80	4.34	2.38	10K	045923114359	24-2pks
90 CRI—CEC/T20 4 Packs - Non-Dimmable														
S28560*	10A19/LED/927/120V/ND/4PK	10	120	A19	E26	FR	2700K	800	90+	4.31	2.38	15K	045923285608	12-4pks
S28561*	10A19/LED/930/120V/ND/4PK	10	120	A19	E26	FR	3000K	800	90+	4.31	2.38	15K	045923285615	12-4pks
S28562*	10A19/LED/940/120V/ND/4PK	10	120	A19	E26	FR	4000K	800	90+	4.31	2.38	15K	045923285622	12-4pks
S28563*	10A19/LED/950/120V/ND/4PK	10	120	A19	E26	FR	5000K	800	90+	4.31	2.38	15K	045923285639	12-4pks

Must be ordered in full cases only. ^ See warranty for details at www.satco.com

Product sheet SA2659

60W REPLACEMENT LED A19 LAMP DISPLAY PACK

Features:

- Direct replacement for 60 Watt incandescent lamps, uses only 10 Watts
- Indoor residential and commercial lighting
- Warm white 2700K
- Damp location
- Approved for totally enclosed fixtures^
- Long life—25,000 hours
- ENERGY STAR certified
- 3 Year warranty

Sold 72 per display



Beam Angle: 240°

DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S29629	10A19/LED/2700K/800L/120V	10	120	A19	E26	FR	2700K	800	80	4.38	2.38	25K	045923296291	72

Must be ordered in full cases only. ^For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA1994

2-LAMP DISPLAY PACK

Features:

- Indoor residential and commercial lighting
- Great for retail end caps and counter areas
- 60 Watt replacement uses only 9.8 Watts
- Innovative design–smooth heat sink design to resemble traditional incandescent lamp
- 2700K
- Damp location
- Approved for totally enclosed fixtures^
- Long life—25,000 hours
- ENERGY STAR certified
- 5 Year warranty

Sold 60 2-Pks per display



Beam Angle: 240°

DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S29699	9.8A19/LED/2700K/800L/2PK	9.8	120	A19	E26	FR	2700K	800	80+	4.31	2.38	25K	045923296994	60-2pks

Must be ordered in full cases only. ^See warranty for details at www.satco.com

Product sheet SA2043

60W REPLACEMENT LED A19 10 PACKS

Features:

- Direct replacements for 60W incandescent lamps uses only 9 Watts
- Value-packed for retail or contractor sales
- Direct replacement for 13 Watt screw-in CFLs
- Indoor residential and commercial lighting
- 3000K, and 5000K options
- Damp location
- Approved for totally enclosed fixtures^
- Long life—10,000 hours
- Non-dimmable
- 3 Year warranty



Beam Angle: 220°

▲ Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11400	9A19/LED/E26/3K/120V/10PK	9	120	A19	E26	FR	3000K	800	80	4.38	2.38	10K	045923114007	4-10pks
S11401	9A19/LED/E26/5K/120V/10PK	9	120	A19	E26	FR	5000K	800	80	4.38	2.38	10K	045923114014	4-10pks
90 CRI—CEC/T20▲														
S11410	9.5A19/LED/930/120V/90CRI/10PK	9.5	120	A19	E26	FR	3000K	760	90	4.41	2.38	10K	045923114106	4-10pks
S11411	9.5A19/LED/950/120V/90CRI/10PK	9.5	120	A19	E26	FR	5000K	760	90	4.41	2.38	10K	045923114113	4-10pks

Master Cases 4/10 Pks ^For minimum compartment size of enclosed fixture visit www.satco.com

100PC CONTRACTOR PACKS

Features:

- Direct replacement for 60 Watt incandescent lamps or 13 Watt CFL, uses only 9 Watts
- 100 per carton for easier installation and storage
- Residential and commercial lighting
- 2700K & 4000K options
- Damp location
- Approved for totally enclosed fixtures^
- 10,000 Hours
- Non-dimmable
- 3 Year warranty

13 3/8"

23 3/8"

4 Trays per Master Carton



Beam Angle: 220°

^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11412	9A19/LED/E26/827/120V/100PK	9	120	A19	E26	FR	2700K	800	80	4.41	2.38	10K	045923114120	100
S11413	9A19/LED/E26/840/120V/100PK	9	120	A19	E26	FR	4000K	800	80	4.41	2.38	10K	045923114137	100

^For minimum compartment size of enclosed fixture visit www.satco.com

LED A19 DUSK TO DAWN LAMPS

Features:

- Direct replacement for 60 Watt incandescent lamp uses only 6.5 or 8 Watts
- Non-dimmable
- Indoor/outdoor residential and commercial lighting
- Automatic operation –no timers to set
- Internal sensor works in any direction
- Damp location
- Long life – up to 15,000 hours

S11428

S11421, S11427



Beam Angle: 200° (White)



Beam Angle: 320°

DAMP LOCATION ^ ENCLOSED FIXTURE c UL LISTED US

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11428	6.5A19/DUSK/DAWN/CL/27K	6.5	120	A19	E26	CL	2700K	800	80	4.02	2.36	15K	045923114281	24/6
S11421	8A19/DUSK/DAWN/LED/27K	8	120	A19	E26	WH	2700K	800	80	4.19	2.38	15K	045923114212	24/6
S11427	8A19/DUSK/DAWN/LED/50K	8	120	A19	E26	WH	5000K	800	80	4.19	2.38	15K	045923114274	24/6

Not compatible with external photo sensors, motion sensors or timers
^ See warranty for details at www.satco.com

Product sheet SA2667

75W REPLACEMENT LED A19 LAMPS

Features:

- Direct replacement for 75 Watt incandescent lamps, uses only 10-13 Watts
- Indoor residential and commercial lighting
- Damp Location
- Approved for totally enclosed fixtures^ E26 & GU24 base options
- Dimmable and non-dimmable options
- CEC/T20 Compliant options available
- ENERGY STAR certified*
- 3 Year warranty—15,000 hours
- 5 Year warranty—25,000 hours



Beam Angle: 220°

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant † DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S29810*†	11A19/LED/2700K/1100L/120V/D	11	120	A19	E26	FR	2700K	1100	80	4.31	2.38	25K	045923298103	24/6
S29811*†	11A19/LED/3000K/1100L/120V/D	11	120	A19	E26	FR	3000K	1100	80	4.31	2.38	25K	045923298110	24/6
S29812*†	11A19/LED/4000K/1100L/120V/D	11	120	A19	E26	FR	4000K	1100	80	4.31	2.38	25K	045923298127	24/6
S29813*†	11A19/LED/5000K/1100L/120V/D	11	120	A19	E26	FR	5000K	1100	80	4.31	2.38	25K	045923298134	24/6
S29814*†	11A19/LED/2700K/120V/D/GU24	11	120	A19	GU24	FR	2700K	1100	80	4.31	2.38	25K	045923298141	24/6
S29804*†	11A19/LED/4000K/120V/D/GU24	11	120	A19	GU24	FR	4000K	1100	80	4.31	2.38	25K	045923298042	24/6
90 CRI—CEC/T20▲														
S28650*†■	11.5A19LED/927/120V	11.5	120	A19	E26	WH	2700K	1100	90	4.33	2.36	25K	045923286506	24/6
S28483*†	11.5A19LED/940/120V	11.5	120	A19	E26	WH	4000K	1100	90	4.33	2.36	25K	045923284830	24/6
S28484*†	11.5A19LED/950/120V	11.5	120	A19	E26	WH	5000K	1100	90	4.33	2.36	25K	045923284847	24/6
S21323*†■	11.5A19LED/927/120V/2PK	11.5	120	A19	E26	WH	2700K	1100	90	4.33	2.36	25K	045923200069	12-4pks
S21324*†■	11.5A19LED/927/GU24/120V	11.5	120	A19	GU24	WH	2700K	1100	90	4.33	2.36	25K	045923200076	24/6
S21325*†■	11.5A19LED/930/GU24/120V	11.5	120	A19	GU24	WH	3000K	1100	90	4.33	2.36	25K	045923200083	24/6
S28485*†■	11.5A19LED/940/GU24/120V	11.5	120	A19	GU24	WH	4000K	1100	90	4.33	2.36	25K	045923284854	24/6
Non-Dimmable														
S28765*	11.5A19/LED/27K/ND/120V	11.5	120	A19	E26	FR	2700K	1100	80	4.31	2.38	15K	045923287657	24/6
S28766*	11.5A19/LED/30K/ND/120V	11.5	120	A19	E26	FR	3000K	1100	80	4.31	2.38	15K	045923287664	24/6
S28767*	11.5A19/LED/40K/ND/120V	11.5	120	A19	E26	FR	4000K	1100	80	4.31	2.38	15K	045923287671	24/6
S28768*	11.5A19/LED/50K/ND/120V	11.5	120	A19	E26	FR	5000K	1100	80	4.31	2.38	15K	045923287688	24/6
Left Hand Threaded														
S11310	10A19/LED/830/LHT	10	120	A19	E26LHT	FR	3000K	1050	80	4.56	2.38	15K	045923113109	24/6
S11311	10A19/LED/840/LHT	10	120	A19	E26LHT	FR	4000K	1050	80	4.56	2.38	15K	045923113116	24/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2254

75W REPLACEMENT LED A19 4-PACKS

Features:

- Direct replacement for 75 Watt incandescent lamps, uses only 11.5-12.5 Watts
- Indoor residential and commercial lighting
- Direct replacement for 18 Watt screw-in CFLs
- 2700K, 3000K, 4000K and 5000K options
- Damp location
- Approved for totally enclosed fixtures^
- Long life—10,000 hours
- ENERGY STAR certified*
- 3 Year warranty



Beam Angle: 220°

▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * Energy ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Non-Dimmable														
S28769*	11.5A19/LED/27K/ND/120V/4PK	11.5	120	A19	E26	FR	2700K	1100	80	4.31	2.38	10K	045923287695	12-4pks
S28770*	11.5A19/LED/50K/ND/120V/4PK	11.5	120	A19	E26	FR	5000K	1100	80	4.31	2.38	10K	045923287701	12-4pks
90 CRI—CEC/T20▲														
S8564	12.5A19/LED/27K/ND/120V/4PK	12.5	120	A19	E26	FR	2700K	1050	90	4.38	2.38	10K	045923085642	12-4pks
S8499	12.5A19/LED/30K/ND/120V/4PK	12.5	120	A19	E26	FR	3000K	1050	90	4.38	2.38	10K	045923084997	12-4pks
S8489	12.5A19/LED/40K/ND/120V/4PK	12.5	120	A19	E26	FR	4000K	1050	90	4.38	2.38	10K	045923084898	12-4pks
S8565	12.5A19/LED/50K/ND/120V/4PK	12.5	120	A19	E26	FR	5000K	1050	90	4.38	2.38	10K	045923085659	12-4pks

Must be ordered in full cases only. ^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2152

75W REPLACEMENT LED A19 10-PACKS

Features:

- Direct replacement for 75 Watt incandescent lamps
- Indoor residential and commercial lighting
- Direct replacement for 18 Watt screw-in CFLs
- 3000K and 5000K options
- Damp location
- Approved for totally enclosed fixtures^
- Long life—10,000 hours
- 3 Year warranty



Beam Angle: 220°

^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11437	12A19/LED/E26/830/120V/10PK	12	120	A19	E26	WH	3000K	1100	80	4.41	2.36	10K	045923114373	4-10pks
S11438	12A19/LED/E26/850/120V/10PK	12	120	A19	E26	WH	5000K	1100	80	4.41	2.36	10K	045923114380	4-10pks

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2624

100W REPLACEMENT LED A19

Features:

- Direct replacement for 100 Watt incandescent lamps, uses only 15-16.5 Watts
- Indoor residential and commercial lighting
- Damp location
- Dimmable and non-dimmable options
- Approved for totally enclosed fixtures^
- CEC/T20 Compliant options available
- Long life—up to 25,000 hours
- ENERGY STAR certified*
- 3 Year warranty—15,000 hours
- 5 Year warranty—25,000 hours



Beam Angle: 220°

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant † DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL LISTED us * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S29815*†	15A19/LED/2700K/1600L/120V/D	15	120	A19	E26	FR	2700K	1600	80	4.63	2.38	25K	045923298158	24/6
S29816*†	15A19/LED/3000K/1600L/120V/D	15	120	A19	E26	FR	3000K	1600	80	4.63	2.38	25K	045923298165	24/6
S29817*†	15A19/LED/4000K/1600L/120V/D	15	120	A19	E26	FR	4000K	1600	80	4.63	2.38	25K	045923298172	24/6
S29818*†	15A19/LED/5000K/1600L/120V/D	15	120	A19	E26	FR	5000K	1600	80	4.63	2.38	25K	045923298189	24/6
S29819*†	15A19/LED/27K/1600/120V/GU24	15	120	A19	GU24	FR	2700K	1600	80	4.5	2.38	25K	045923298196	24/6
S29805*†	15A19/LED/40K/1600/120V/GU24	15	120	A19	GU24	FR	4000K	1600	80	4.5	2.38	25K	045923298059	24/6
90 CRI—CEC/T20▲														
S28652*†■	16.5A19LED/927/120V	16.5	120	A19	E26	WH	2700K	1600	90	4.65	2.36	25K	045923286520	24/6
S28653*†■	16.5A19LED/930/120V	16.5	120	A19	E26	WH	3000K	1600	90	4.65	2.36	25K	045923286537	24/6
S28486†■	16.5A19LED/940/120V	16.5	120	A19	E26	WH	4000K	1600	90	4.65	2.36	25K	045923284861	24/6
S28487†	16.5A19LED/950/120V	16.5	120	A19	E26	WH	5000K	1600	90	4.65	2.36	25K	045923200106	24/6
S21326†■	16.5A19LED/927/120V/2PK	16.5	120	A19	E26	WH	2700K	1600	90	4.65	2.36	25K	045923200090	12-2pks
S21327†■	16.5A19LED/927/GU24/120V	16.5	120	A19	GU24	WH	2700K	1600	90	4.53	2.36	25K	045923213274	24/6
S21328†■	16.5A19LED/930/GU24/120V	16.5	120	A19	GU24	WH	3000K	1600	90	4.53	2.36	25K	045923213281	24/6
S28488†■	16.5A19LED/940/GU24/120V	16.5	120	A19	GU24	WH	4000K	1600	90	4.53	2.36	25K	045923284885	24/6
Non-Dimmable														
S28785*	15.5A19/LED/27K/ND/120V	15.5	120	A19	E26	FR	2700K	1600	80	4.63	2.38	15K	045923287855	24/6
S28786*	15.5A19/LED/30K/ND/120V	15.5	120	A19	E26	FR	3000K	1600	80	4.63	2.38	15K	045923287862	24/6
S28787*	15.5A19/LED/40K/ND/120V	15.5	120	A19	E26	FR	4000K	1600	80	4.63	2.38	15K	045923287879	24/6
S28788*	15.5A19/LED/50K/ND/120V	15.5	120	A19	E26	FR	5000K	1600	80	4.63	2.38	15K	045923287886	24/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2255

100W REPLACEMENT LED A19 4-PACKS

Features:

- Direct replacements for 100 Watt incandescent lamps uses only 15.5 Watts
- Indoor residential and commercial lighting
- Direct replacement for 13, 18 & 23W screw-in CFLs
- 2700K to 5000K options
- Damp location
- Approved for totally enclosed fixtures^
- Long life—up to 15,000 hours
- ENERGY STAR certified*
- 3 Year warranty



Beam Angle: 220°

▲ Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant † DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
100W Replacement - Dimmable														
S11422†	15.5A19/LED/827/120V/D/4PK	15.5	120	A19	E26	FR	2700K	1600	80	4.57	2.38	15K	045923114229	12-4pks
S11423†	15.5A19/LED/830/120V/D/4PK	15.5	120	A19	E26	FR	3000K	1600	80	4.57	2.38	15K	045923114236	12-4pks
S11424†	15.5A19/LED/840/120V/D/4PK	15.5	120	A19	E26	FR	4000K	1600	80	4.57	2.38	15K	045923114243	12-4pks
S11425†	15.5A19/LED/850/120V/D/4PK	15.5	120	A19	E26	FR	5000K	1600	80	4.57	2.38	15K	045923114250	12-4pks
Non-Dimmable														
S28789*	15.5A19/LED/27K/ND/120V/4PK	15.5	120	A19	E26	FR	2700K	1600	80	4.63	2.38	15K	045923287893	12-4pks
S28790*	15.5A19/LED/50K/ND/120V/4PK	15.5	120	A19	E26	FR	5000K	1600	80	4.63	2.38	15K	045923287909	12-4pks
90 CRI—CEC/T20 - Non-Dimmable▲														
S8566	15.5A19/LED/27K/ND/120V/4PK	15.5	120	A19	E26	FR	2700K	1490	90	4.63	2.38	15K	045923085666	12-4pks
S8567	15.5A19/LED/30K/ND/120V/4PK	15.5	120	A19	E26	FR	3000K	1490	90	4.63	2.38	15K	045923085673	12-4pks
S8490	15.5A19/LED/40K/ND/120V/4PK	15.5	120	A19	E26	FR	4000K	1490	90	4.63	2.38	15K	045923084904	12-4pks
S8568	15.5A19/LED/50K/ND/120V/4PK	15.5	120	A19	E26	FR	5000K	1490	90	4.63	2.38	15K	045923085680	12-4pks

Must be ordered in full cases only. ^See warranty for details at www.satco.com

Product sheets SA2330, SA2400, SA2180-3

100W REPLACEMENT LED A19 10-PACKS



Beam Angle: 220°

^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Non-Dimmable														
S11418	14A19/LED/E26/830/120V/10PK	14	120	A19	E26	WH	3000K	1600	80	4.57	2.36	10K	045923114182	4-10pks
S11419	14A19/LED/E26/850/120V/10PK	14	120	A19	E26	WH	5000K	1600	80	4.57	2.36	10K	045923114199	4-10pks

Sold per 10 pack. ^See warranty for details at www.satco.com

Product sheet SA2624

125W REPLACEMENT 120-277V LED A21 LAMPS

Features:

- Direct replacement for 125 Watt incandescent & 25 Watt CFL lamps, uses only 20 Watts
- Indoor residential and commercial lighting
- Down lighting
- CEC/T20 compliant
- 2700K, 3000K, 4000K and 5000K options
- Damp location Approved for totally enclosed fixtures^
- c-UL-us listed Long life—25,000 hours
- ENERGY STAR certified*
- 5 Year warranty



Beam Angle: 220°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Non-Dimmable														
S11329*	20A21/LED/927/120-277V/ND	20	120V-277	A21	E26	WH	2700K	2000	90	5.55	2.63	25K	045923113291	24/6
S11330*	20A21/LED/930/120-277V/ND	20	120V-277	A21	E26	WH	3000K	2000	90	5.55	2.63	25K	045923113307	24/6
S11331	20A21/LED/940/120-277V/ND	20	120V-277	A21	E26	WH	4000K	2000	90	5.55	2.63	25K	045923113314	24/6
S11332	20A21/LED/950/120-277V/ND	20	120V-277	A21	E26	WH	5000K	2000	90	5.55	2.63	25K	045923113321	24/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2696

3-WAY LED A19 & A21 LAMPS

Features:

- Direct replacement for 30/70/100W 3-Way incandescent lamps, uses only 3/9/12 Watts
- Direct replacement for 50/100/150W 3-Way incandescent lamps uses only 5/15/21 Watts
- Indoor residential and commercial lighting
- 220° Omni-directional
- 2700K, 3000K, 4000K and 5000K options
- Damp location rated
- Approved for totally enclosed fixtures ˆ
- ENERGY STAR certified*
- Long life—25,000 hours
- 5 Year warranty



Beam Angle: 220°

▲ Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant | DAMP LOCATION | ˆ ENCLOSED FIXTURE | UL US LISTED | * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
30/70/100W 3-Way														
S9316*	3/9/12A19/3WAY LED/2700K/120V	3/9/12	120	A19	E26	FR	2700K	280/950/1200	80	4.66	2.38	25K	045923093166	24/6
S9317*	3/9/12A19/3WAY LED/3000K/120V	3/9/12	120	A19	E26	FR	3000K	280/950/1200	80	4.63	2.38	25K	045923093173	24/6
S9318	3/9/12A19/3WAY LED/4000K/120V	3/9/12	120	A19	E26	FR	4000K	280/950/1200	80	4.63	2.38	25K	045923093180	24/6
S9319	3/9/12A19/3WAY LED/5000K/120V	3/9/12	120	A19	E26	FR	5000K	280/950/1200	80	4.63	2.38	25K	045923093197	24/6
90 CRI—CEC/T20▲														
S8570	3/9/12A19/3WAY LED/2700K/90CRI	3/9/12	120	A19	E26	FR	2700K	230/850/1050	90	4.66	2.38	25K	045923085703	24/6
S8571	3/9/12A19/3WAY LED/3000K/90CRI	3/9/12	120	A19	E26	FR	3000K	230/850/1050	90	4.63	2.38	25K	045923085710	24/6
50/100/150W 3-Way														
S8542*	5/15/21A21/3-WAY/LED/27K	5/15/21	120	A21	E26	FR	2700K	600/1600/2150	80	5.5	2.63	25K	045923085420	24/6
S8543*	5/15/21A21/3-WAY/LED/30K	5/15/21	120	A21	E26	FR	3000K	600/1600/2150	80	5.5	2.63	25K	045923085437	24/6
S8544	5/15/21A21/3-WAY/LED/40K	5/15/21	120	A21	E26	FR	4000K	600/1600/2150	80	5.5	2.63	25K	045923085444	24/6
S8545	5/15/21A21/3-WAY/LED/50K	5/15/21	120	A21	E26	FR	5000K	600/1600/2150	80	5.5	2.63	25K	045923085451	24/6

ˆ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2608

HI-PRO LED A21 LAMPS

Features:

- High lumen, A21 lamps for industrial and commercial applications
- For use in bollard and post top lighting
- High ceiling recessed lighting
- Replaces high lumen incandescent and CFL lamps
- Dimmable & non-dimmable
- Damp location
- Saves over 80% on energy costs
- Advanced heat dissipation design
- Direct wire range voltage 120-277V options
- High efficiency—up to 150 LPW
- 2700K, 4000K and 5000K options
- Base up, base down or horizontal operation
- Long life—25,000 hours
- ENERGY STAR certified
- 5 Year limited warranty



Beam Angle: 280°

Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant † DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S8791▾†	20WA21/LED/927/120V/DIM	20	120	A21	E26	WH	2700K	2040	90	5.00	2.44	25K	045923087912	24/12
S8735*†	20WA21/LED/827/120V/DIM	20	120	A21	E26	FR	2700K	2350	80	5.00	2.63	25K	045923087356	24/12
S8778*†	20WA21/LED/840/120V/DIM	20	120	A21	E26	FR	4000K	2747	80	5.00	2.63	25K	045923087783	24/12
S8736^†	20WA21/LED/850/120V/DIM	20	120	A21	E26	FR	5000K	2860	80	5.00	2.63	25K	045923087363	24/12
Non-Dimmable														
S8792▾	20WA21/LED/927/120-277V	20	120-277	A21	E26	WH	2700K	2100	90	5.00	2.44	25K	045923087929	24/12
S8737*	20WA21/LED/827/120-277V	20	120-277	A21	E26	FR	2700K	2450	80	5.00	2.63	25K	045923087370	24/12
S8779*	20WA21/LED/840/120-277V	20	120-277	A21	E26	FR	4000K	2828	80	5.00	2.63	25K	045923087790	24/12
S8738*	20WA21/LED/850/120-277V	20	120-277	A21	E26	FR	5000K	2910	80	5.00	2.63	25K	045923087387	24/12
Accessories														
92-410	MOGUL TO MED REDUCER 660W-600V												045923924101	200/10
80-929	LED HID SURGE PROTECTOR												045923809293	100/1

Product sheet SA2218

HI-PRO LED
A23 & A25 LAMP

Features

- Replaces high lumen incandescent and CFL lamps and A25 series up to 150W HID
- 25W - E26 and EX39 / up to 3600 lumens
- 35W - EX39 / up to 4800 lumens
- Saves over 80% on energy costs
- Advanced heat dissipation design
- Direct wire range voltage 120-277V
- High efficiency—up to 145 LPW
- 2700K, 4000K, 5000K and 6500K options
- Base up, base down or horizontal operation
- Damp location
- Long life—up to 50,000 hours
- 5 Year limited warranty

A23

A25



Beam Angle: 280° (Clear)

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S13100*	25WA23/LED/27K/100-277V/E26	25	100-277	A23	E26	FR	2700K	3275	80	6.28	3.22	25K	045923131004	24/12
S13101*	25WA23/LED/40K/100-277V/E26	25	100-277	A23	E26	FR	4000K	3375	80	6.28	3.22	25K	045923131011	24/12
S13102*	25WA23/LED/50K/100-277V/E26	25	100-277	A23	E26	FR	5000K	3525	80	6.28	3.22	25K	045923131028	24/12
S13103*	25WA23/LED/65K/100-277V/E26	25	100-277	A23	E26	FR	6500K	3525	80	6.28	3.22	25K	045923131035	24/12
S13104◆	25WA23/LED/27K/100-277V/EX39	25	100-277	A23	EX39	FR	2700K	3275	80	6.66	3.22	50K	045923131042	24/12
S13105◆	25WA23/LED/40K/100-277V/EX39	25	100-277	A23	EX39	FR	4000K	3375	80	6.66	3.22	50K	045923131059	24/12
S13106◆	25WA23/LED/50K/100-277V/EX39	25	100-277	A23	EX39	FR	5000K	3525	80	6.66	3.22	50K	045923131066	24/12
S13107	25WA23/LED/65K/100-277V/EX39	25	100-277	A23	EX39	FR	6500K	3525	80	6.66	3.22	50K	045923131073	24/12
S13108◆	35WA25/LED/27K/100-277V/EX39	35	100-277	A25	EX39	FR	2700K	4480	80	7.25	3.75	50K	045923131080	12
S13109◆	35WA25/LED/40K/100-277V/EX39	35	100-277	A25	EX39	FR	4000K	4725	80	7.25	3.75	50K	045923131097	12
S13110◆	35WA25/LED/50K/100-277V/EX39	35	100-277	A25	EX39	FR	5000K	4830	80	7.25	3.75	50K	045923131103	12
S13111	35WA25/LED/65K/100-277V/EX39	35	100-277	A25	EX39	FR	6500K	4830	80	7.25	3.75	50K	045923131110	12

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2492

40W & 60W CANDELABRA BASE REPLACEMENT LED A19 LAMPS

Features:

- Direct replacements for 9 Watt and 13 Watt candelabra base CFL
- Indoor residential and commercial lighting
- Display lighting
- Accent lighting
- Dimmable
- 2700K, 3000K, 4000K and 5000K options
- Damp location
- Approved for totally enclosed fixtures^
- Long life—25,000 hours
- 5 Year warranty



Beam Angle: 220°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
40W Replacement														
S21800*	6A19/OMNI/220/LED/E12/27K	6	120	A19	E12	FR	2700K	480	80	4.31	2.38	25K	045923218002	24/6
S21801*	6A19/OMNI/220/LED/E12/30K	6	120	A19	E12	FR	3000K	480	80	4.31	2.38	25K	045923218019	24/6
S21802	6A19/OMNI/220/LED/E12/40K	6	120	A19	E12	FR	4000K	480	80	4.31	2.38	25K	045923218026	24/6
S21803	6A19/OMNI/220/LED/E12/50K	6	120	A19	E12	FR	5000K	480	80	4.31	2.38	25K	045923218033	24/6
60W Replacement														
S21804*	9.8A19/OMNI/220/LED/E12/27K	9.8	120	A19	E12	FR	2700K	800	80	4.31	2.38	25K	045923218040	24/6
S21805*	9.8A19/OMNI/220/LED/E12/30K	9.8	120	A19	E12	FR	3000K	800	80	4.31	2.38	25K	045923218057	24/6
S21806	9.8A19/OMNI/220/LED/E12/40K	9.8	120	A19	E12	FR	4000K	800	80	4.31	2.38	25K	045923218064	24/6
S21807	9.8A19/OMNI/220/LED/E12/50K	9.8	120	A19	E12	FR	5000K	800	80	4.31	2.38	25K	045923218071	24/6

^For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2469

LED A19 COLORS

Features:

- Direct replacement for 60 Watt incandescent lamps, uses only 8 Watts
- Indoor residential and commercial lighting
- Party bulbs
- Display lighting
- Accent lighting
- Ceramic-lined glass envelopes
- 360˚ Beam angle
- Damp location
- Approved for totally enclosed fixtures ˆ
- Long life–15,000 hours
- 3 Year warranty

S14990
Blacklight

Colors for a reason
Blue—in support of law enforcement/Autism awareness
Green—in support of veterans
Yellow—bug lights
Pink—Breast cancer awareness



Beam Angle: 360°

DIMMABLE ˆ ENCLOSED FIXTURE DAMP LOCATION 360° BEAM c UL US LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S14984	8A19/RED/LED/E26/120V	8	120	A19	E26	CER RED	4.13	2.38	15K	045923149849	24/6
S14985	8A19/BLUE/LED/E26/120V	8	120	A19	E26	CER BLUE	4.13	2.38	15K	045923149856	24/6
S14986	8A19/GREEN/LED/E26/120V	8	120	A19	E26	CER GRN	4.13	2.38	15K	045923149863	24/6
S14987	8A19/YELLOW/E26/120V	8	120	A19	E26	CER YLW	4.13	2.38	15K	045923149870	24/6
S14988	8A19/ORANGE/LED/E26/120V	8	120	A19	E26	CER ORNG	4.13	2.38	15K	045923149887	24/6
S14989	8A19/PINK/LED/E26/120V	8	120	A19	E26	CER PINK	4.13	2.38	15K	045923149894	24/6
S14990	8A19/BL/LED/E26/120V	8	120	A19	E26	BLACK	4.13	2.38	15K	045923149900	24/6

ˆ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2482

LED T10 HIGH LUMEN LAMPS



Beam Angle: 360°

Features:

- High lumen output
- Generates less heat than halogen
- 3000 & 4000K
- c-UL-us Listed
- 3 Year warranty

Applications

- Replaces Halogen T10 double envelope
- Picture lights
- Sconces
- Showcase displays
- Ceiling fixtures

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Dimmable														
S11224†	8T10/LED/HL/930/FR/DIM/CD	8	120	T10	E26	FR	3000K	900	90	4.02	1.26	15K	045923112249	
S11225†	8T10/LED/HL/940/FR/DIM/CD	8	120	T10	E26	FR	4000K	900	90	4.02	1.26	15K	045923112256	
Non-Dimmable														
S11218	8T10/LED/HL/30K/FR/ND/CD	8	120	T10	E26	FR	3000K	1020	80	4.02	1.26	15K	045923112188	24/12
S11219	8T10/LED/HL/40K/FR/ND/CD	8	120	T10	E26	FR	4000K	1080	80	4.02	1.26	15K	045923112195	24/12

Not for use in wet or damp locations.

Product sheet SA2734

DECORATIVE LED LAMPS

Features:

- 25W candle replacement uses only 2.8W
- 40W candle replacement uses only up to 4.5W
- Dimmable
- Damp location
- Long life—25,000 hours
- Approved for totally enclosed fixtures^
- ENERGY STAR certified*
- 5 Year warranty

Applications:

- Accent lighting
- Pendant lighting

CTC

ETC

G25

Candle Beam Profile



Beam Angle: 275°

Globe Beam Profile



Beam Angle: 175°

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant DIMMABLE ^ ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S8950	2.8CTC/LED/3000K/165L/120V	2.8	120	B11	E12	CL	3000K	160	80	3.75	1.38	25K	045923089503	12
S8951*	4.5CTC/LED/2700K/E12/120V	4.5	120	B11	E12	CL	2700K	300	80	3.75	1.38	25K	045923089510	12
S8952*	4.5CTC/LED/3000K/E12/120V	4.5	120	B11	E12	CL	3000K	300	80	3.75	1.38	25K	045923089527	12
S8953*	4.5ETC/LED/3000K/E26/120V	4.5	120	B11	E26	CL	3000K	300	80	3.75	1.38	25K	045923089534	12
90 CRI—CEC/T20▲														
S29618*■	3.5CTC/LED/927/E12/120V	3.5	120	B11	E12	CL	2700K	300	90+	3.75	1.38	25K	045923296185	48/12
S28574*	3.5CTC/LED/930/E12/120V	3.5	120	B11	E12	CL	3000K	300	90+	3.75	1.38	25K	045923285745	48/12
S28617*	3.5ETC/LED/927/E26/120V	3.5	120	B11	E26	CL	2700K	300	90+	3.75	1.38	25K	045923286179	48/12
S28575	3.5ETC/LED/930/E26/120V	3.5	120	B11	E26	CL	3000K	300	90+	3.75	1.38	25K	045923285752	48/12
GLOBES - G25														
S9200*	6G25/LED/2700K/450L/120/D	6	120	G25	E26	FR	2700K	450	80	4.25	3.13	25K	045923092008	24/6
S9201*	6G25/LED/3000K/450L/120/D	6	120	G25	E26	FR	3000K	450	80	4.25	3.13	25K	045923092015	24/6
S9202	6G25/LED/4000K/450L/120/D	6	120	G25	E26	FR	4000K	450	80	4.25	3.13	25K	045923092022	24/6
S9203	6G25/LED/5000K/450L/120/D	6	120	G25	E26	FR	5000K	450	80	4.25	3.13	25K	045923092039	24/6
90 CRI—CEC/T20▲														
S29619*■	4G25/LED/927/120V	4	120	G25	E26	WH	2700K	360	90+	4.25	3.13	25K	045923296192	24/6
S28576*	4G25/LED/930/120V	4	120	G25	E26	WH	3000K	360	90+	4.25	3.13	25K	045923285769	24/6
S28618*	4G25/LED/940/120V	4	120	G25	E26	WH	4000K	360	90+	4.25	3.13	25K	045923286186	24/6
S28595	4G25/LED/950/120V	4	120	G25	E26	WH	5000K	360	90	4.25	3.13	25K	045923285950	24/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA1370

LED J-TYPE T3 LAMPS

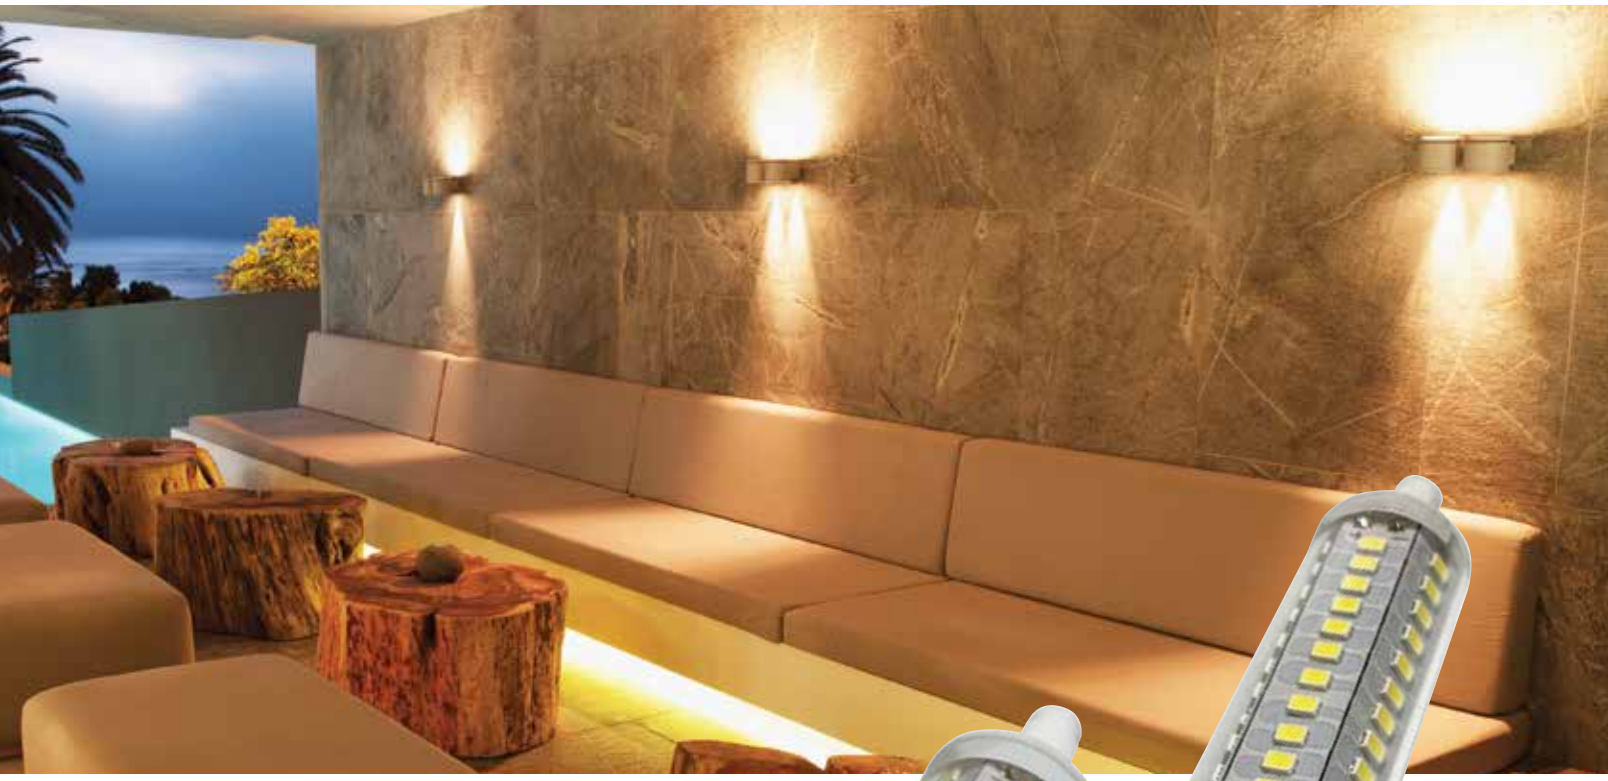

Features:

- Outperforms 50W and 100W Halogen equivalents
- Direct replacement/energy saving
- Dimmable
- Long life
- 3 Year warranty

Applications:

- Floor lamps
- Billboards
- Garden lighting
- Desk lamps
- Wall sconces
- Outdoor security lighting

DAMP LOCATION | DIMMABLE | ^ ENCLOSED FIXTURE | c UL US LISTED

Item	Description	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11220	6W/LED/T3/78MM/830/120V/D	6	120	T3	R7S	3000K	600	80	3.07	0.98	15K	045923112201	48
S11221	6W/LED/T3/78MM/840/120V/D	6	120	T3	R7S	4000K	600	80	3.07	0.98	15K	045923112218	48
S11222	10W/LED/T3/118MM/830/120V/D	10	120	T3	R7S	3000K	1200	80	4.65	0.98	15K	045923112225	48
S11223	10W/LED/T3/118MM/840/120V/D	10	120	T3	R7S	4000K	1200	80	4.65	0.98	15K	045923112232	48

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2520

FULL SPECTRUM LED GROW LIGHTS

Features:

- Standard A19, BR30 AND PAR38 lamp shapes with E26 base
- Red spectrum fortified for increased budding and flowering
- Wet location rated
- Light intensity: 21 PAR/PPF
- 3 Year warranty

LED 9W A19 GROW LIGHT

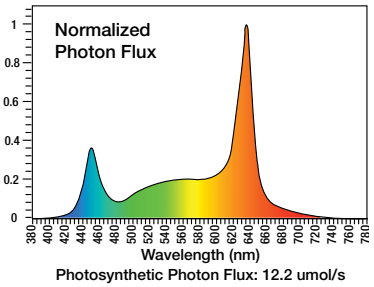

LED 9W BR30 GROW LIGHT

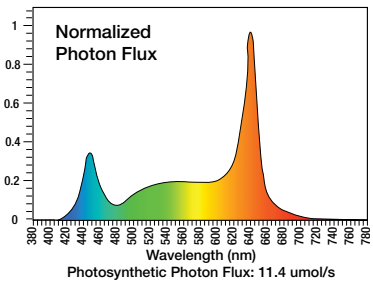

LED 16W PAR38 GROW LIGHT

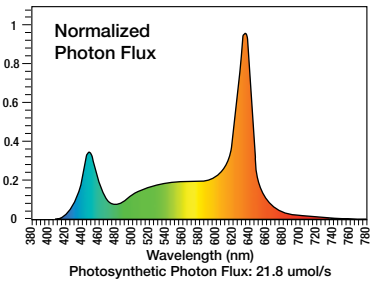

Item	Description	W	V	Bulb Shape	Base	CCT	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11440	9A19/LED/GROW/120V	9	120	A19	E26	3000K	80	4.41	2.36	15K	045923114403	48
S11441	9BR30/LED/GROW/120V	9	120	BR30	E26	4000K	80	5.12	3.70	15K	045923114410	12
S11442	16PAR38/LED/GROW/120V	16	120	PAR38	E26	3000K	80	5.00	4.72	15K	045923114427	12

Product sheet SA2470

LED LINEAR T10 LAMPS

Features:

- Energy efficient alternative to traditional 35W, 60W and 150W T10 linear incandescent lamps use only 5W, 7W and 13W
- Direct replacements for LN35, LN60 and LN150 lamps
- Full PC material (bulb opaque)
- Simple installation—no ballasts or transformers required
- S14S Base
- Dimmable
- 2700K
- Long life—30,000 hours
- 5 Year warranty

DIMMABLE | 30,000 HOURS | 2700 K | c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S8191	LED LN35 2700K 11.8" DIM	5	120	T10	S14S	FR	2700K	330	80	11.81	1.25	30K	045923081910	12
S8189	LED LN60 2700K 19.68" DIM	7	120	T10	S14S	FR	2700K	500	80	19.69	1.25	30K	045923081897	12
S8190	LED LN150 2700K 39.37 DIM	13	120	T10	S14S	FR	2700K	1000	80	39.37	1.25	30K	045923081903	12

Product sheet SA2427

LED SQUAT CFL LAMP REPLACEMENT WITH GU24 BASE

Features:

- Direct replacement for squat GU24-based CFL lamps
- 13 Watt CFL replacement uses only 9.5 Watts (60W incandescent)
- 18 Watt CFL replacement uses only 12 Watts (75W incandescent)
- GU24 base
- Uniform luminance pattern
- 2700K and 4000K options
- 90 CRI
- Approved for totally enclosed fixtures^ Damp location
- Long life—25,000 hours
- 5 Year warranty

Applications:

- Indoor residential and commercial lighting
- Utility fixtures
- Closet lighting

Replacement for CFL in Satco squat fixtures: 90-2615, 90-2616, 90-2631, 90-2632



Beam Angle: 100°

GU24 BASE^ | ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S11540	9.5W/SQUAT/LED/27K/GU24	9.5	120	T3	GU24	FR	2700K	800	90	2.81	2.75	25K	045923115400	24/6
S11541	9.5W/SQUAT/LED/40K/GU24	9.5	120	T3	GU24	FR	4000K	800	90	2.81	2.75	25K	045923015410	24/6
S11542	12W/SQUAT/LED/27K/GU24	12	120	T3	GU24	FR	2700K	1100	90	2.81	2.75	25K	045923115424	24/6
S11543	12W/SQUAT/LED/40K/GU24	12	120	T3	GU24	FR	4000K	1100	90	2.81	2.75	25K	045923115431	24/6

Average rated life may vary depending on application, use, fixture type and environment
^See warranty for details at www.satco.com

Product sheet SA2614

R20, BR30 & BR40 LED REFLECTORS

R20 Features:

- 50R20 replacement uses only up to 6.5 Watts
- Indoor residential and commercial lighting
- Dimmable
- Damp location
- Long life—25,000 hours
- ENERGY STAR certified* 5 Year warranty
- CEC T20/T24

BR30 Features:

- 65BR30 replacement uses only up to 9.5 Watts
- Indoor residential and commercial lighting
- Display lighting
- New one piece, lighter weight design
- Dimmable
- Long life—25,000 hours
- ENERGY STAR certified
- 5 Year warranty
- CEC T20/T24

R20 LED REFLECTORS 80 & 90 CRI



Beam Angle: 107°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9630*	6.5R20/LED/2700K/525L/120V	6.5	120	R20	E26	GRAY	2700K	525	80	107°	3.94	2.50	25K	045923096303	24/6
S9631*	6.5R20/LED/3000K/525L/120V	6.5	120	R20	E26	GRAY	3000K	525	80	107°	3.94	2.50	25K	045923096310	24/6
S9632*	6.5R20/LED/4000K/525L/120V	6.5	120	R20	E26	GRAY	4000K	525	80	107°	3.94	2.50	25K	045923096327	24/6
S9633*	6.5R20/LED/5000K/525L/120V	6.5	120	R20	E26	GRAY	5000K	525	80	107°	3.94	2.50	25K	045923096334	24/6
90 CRI—CEC/T20▲															
S29614*■	6R20/LED/927/120V	6	120	R20	E26	GRAY	2700K	525	90+	107°	3.94	2.50	25K	045923296147	24/6
S28577*■	6R20/LED/930/120V	6	120	R20	E26	GRAY	3000K	525	90+	107°	3.94	2.50	25K	045923285776	24/6
S28491*■	6R20/LED/940/120V	6	120	R20	E26	GRAY	4000K	525	90+	107°	3.94	2.50	25K	045923284915	24/6
S28619*	6R20/LED/950/120V	6	120	R20	E26	GRAY	5000K	525	90+	107°	3.94	2.50	25K	045923286193	24/6

Product sheet SA2629

BR30 LED REFLECTORS 80 & 90 CRI



Beam Angle: 105°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9620*	9.5BR30/LED/2700K/750L/120V/D	9.5	120	BR30	E26	GRAY	2700K	750	80	105°	5.19	3.75	25K	045923096204	12/6
S9621*	9.5BR30/LED/3000K/750L/120V/D	9.5	120	BR30	E26	GRAY	3000K	750	80	105°	5.19	3.75	25K	045923096211	12/6
S9622*	9.5BR30/LED/4000K/750L/120V/D	9.5	120	BR30	E26	GRAY	4000K	750	80	105°	5.19	3.75	25K	045923096228	12/6
S9623*	9.5BR30/LED/5000K/750L/120V/D	9.5	120	BR30	E26	GRAY	5000K	750	80	105°	5.19	3.75	25K	045923096235	12/6
S9624	9.5BR30/LED/27K/GU24/750L/120V	9.5	120	BR30	GU24	GRAY	2700K	750	80	105°	4.94	3.75	25K	045923096242	12/6
S9627	9.5BR30/LED/30K/GU24/750L/120V	9.5	120	BR30	GU24	GRAY	3000K	750	80	105°	4.94	3.75	25K	045923096273	12/6
90 CRI—CEC/T20▲															
S29625*■	7.5BR30/LED/927/120V	7.5	120	BR30	E26	GRAY	2700K	650	90+	105°	5.19	3.75	25K	045923296253	12/6
S28578*■	7.5BR30/LED/930/120V	7.5	120	BR30	E26	GRAY	3000K	650	90+	105°	5.19	3.75	25K	045923285783	12/6
S28547*■	7.5BR30/LED/935/120V	7.5	120	BR30	E26	GRAY	3500K	650	90+	105°	5.19	3.75	25K	045923285479	12/6
S28492*■	7.5BR30/LED/940/120V	7.5	120	BR30	E26	GRAY	4000K	650	90+	105°	5.19	3.75	25K	045923284922	12/6
S28596*	7.5BR30/LED/950/120V	7.5	120	BR30	E26	GRAY	5000K	650	90+	105°	5.19	3.75	25K	045923285967	12/6
S11333*■	7.5BR30/LED/927/120V/2PK	7.5	120	BR30	E26	GRAY	2700K	650	90	105°	5.16	3.74	25K	045923113338	12/6
S29626*■	7.5BR30/LED/927/GU24/120V	7.5	120	BR30	GU24	GRAY	2700K	650	90+	105°	5.19	3.75	25K	045923296260	12/6
S28579*■	7.5BR30/LED/930/GU24/120V	7.5	120	BR30	GU24	GRAY	3000K	650	90+	105°	5.19	3.75	25K	045923285790	12/6

Product sheet SA1784

8W BR30 LED 2-PACK DISPLAY

Features:

- 65 Watt replacement uses only 8 Watts
- Indoor residential and commercial lighting
- Great for retail end caps or counter areas
- 2700K
- Dimmable
- Damp location
- High efficiency
- Long life—25,000 hours
- ENERGY STAR certified
- 5 Year warranty

Sold 24 2-pks per display



Beam Angle: 105°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9698	8BR30/LED/2700K/650L/2PK	8	120	BR30	E26	GRAY	2700K	650	80	105°	5.19	3.75	25K	045923096983	24-2pks

Must be ordered in full cases only.

Product sheet SA2042

BR30 LED REFLECTOR DISPLAY PACKS

Features:

- 65W BR30 replacement uses up to 10 Watts
- Indoor residential and commercial lighting
- 2700K
- Dimmable
- Damp location
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty



Beam Angle: 100°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
Display Pack															
S29628	10BR30/LED/2700K/700L/120V/D	10	120	BR30	E26	WH	2700K	700	80+	100°	5.13	3.75	25K	045923296284	48/6

Product sheet SA2281

BR30 LED REFLECTOR 6 PACKS

6 pack
Contractor Pack



Beam Angle: 100°

▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant | DIMMABLE | DAMP LOCATION | c UL us LISTED | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
6 Packs															
S9021	10BR30/LED/827/120V/6PK	10	120	BR30	E26	GRAY	2700K	700	80	100°	5.13	3.75	25K	045923090219	4-6pks
S9022	10BR30/LED/830/120V/6PK	10	120	BR30	E26	GRAY	3000K	700	80	100°	5.13	3.75	25K	045923090226	4-6pks
S9029	10BR30/LED/840/120V/6PK	10	120	BR30	E26	GRAY	4000K	700	80	100°	5.13	3.75	25K	045923090295	4-6pks
S9058	10BR30/LED/850/120V/6PK	10	120	BR30	E26	GRAY	5000K	700	80	100°	5.12	3.70	25K	045923090585	4-6pks
90 CRI—CEC/T20▲															
S11420	8.7BR30/LED/927/120V/90CRI/6PK	8.7	120	BR30	E26	GRAY	2700K	700	90	100°	5.13	3.75	25K	045923114205	4-6pks

Must be ordered in full cases only.

Product sheet SA2281

11.5W, 13W & 16.5W BR40 LED REFLECTORS 80 & 90 CRI

Features:

- 65W BR40 replacement uses only up to 13 Watts
- 85W BR40 replacement uses only 16.5 Watts
- Indoor residential and commercial lighting
- Dimmable
- Damp location
- Long life—25,000 hours
- ENERGY STAR certified*
- 5 Year warranty



Beam Angle: 103°

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant | ▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant | DIMMABLE | DAMP LOCATION | c UL us LISTED | ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9634	11.5BR40/LED/2700K/940L/120V	11.5	120	BR40	E26	GRAY	2700K	940	80	103°	6.44	5.00	25K	045923096341	12/6
S9635	11.5BR40/LED/3000K/940L/120V	11.5	120	BR40	E26	GRAY	3000K	940	80	103°	6.44	5.00	25K	045923096358	12/6
S9636	11.5BR40/LED/4000K/940L/120V	11.5	120	BR40	E26	GRAY	4000K	940	80	103°	6.44	5.00	25K	045923096365	12/6
S9637	11.5BR40/LED/5000K/940L/120V	11.5	120	BR40	E26	GRAY	5000K	940	80	103°	6.44	5.00	25K	045923096372	12/6
S9638	16.5BR40/LED/2700K/1200L/120V	16.5	120	BR40	E26	GRAY	2700K	1200	80	103°	6.44	5.00	25K	045923096389	12/6
S9639	16.5BR40/LED/3000K/1200L/120V	16.5	120	BR40	E26	GRAY	3000K	1200	80	103°	6.44	5.00	25K	045923096396	12/6
S9640	16.5BR40/LED/4000K/1200L/120V	16.5	120	BR40	E26	GRAY	4000K	1200	80	103°	6.44	5.00	25K	045923096402	12/6
S9641	16.5BR40/LED/5000K/1200L/120V	16.5	120	BR40	E26	GRAY	5000K	1200	80	103°	6.44	5.00	25K	045923096419	12/6
90 CRI—CEC/T20▲															
S29615■	13BR40/LED/927/120V	13	120	BR40	E26	GRAY	2700K	1075	90+	103°	6.44	5.00	25K	045923296154	12/6
S28580■	13BR40/LED/930/120V	13	120	BR40	E26	GRAY	3000K	1075	90+	103°	6.44	5.00	25K	045923285806	12/6
S28493■	13BR40/LED/940/120V	13	120	BR40	E26	GRAY	4000K	1075	90+	103°	6.44	5.00	25K	045923284939	12/6
S28597	13BR40/LED/950/120V	13	120	BR40	E26	GRAY	5000K	1075	90+	103°	6.44	5.00	25K	045923285974	12/6

Product sheet SA1812

PAR 20, PAR 30 AMBER LAMPS "Turtle Friendly"

Features:

- Amber color – Sea turtle friendly
- Operating temperature – 13°F to 113°F (-25°C to 45°C)
- Halogen PAR LED Replacement
- Long Life – 25,000 hours

ILLUMINATION (PAR 20)



Beam Angle: 40°

ILLUMINATION (PAR 30)



Beam Angle: 40°

WET LOCATION

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	NM	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S39188	6.5PAR20/LED/40'/AMBER	6.5	120	PAR20	E26	WH	AMB	150	590	40°	3.23	2.48	25K	045923391880	24/6
S29189	8PAR30/LN/LED/40'/AMBER	8	120	PAR30	E26	WH	AMB	280	590	40°	4.57	3.74	25K	045923291890	24/6

Product sheet SA1641

SILVER PAR SERIES

Features:

- Silver colored reflector
- Traditional lens
- Indoor/outdoor/wet location
- Dimmable
- 25˚, 40˚ and 60˚ Beam spreads
- 2700K, 3000K, 3500K, 4000K and 5000K
- 90 CRI

PAR 20

Illumination

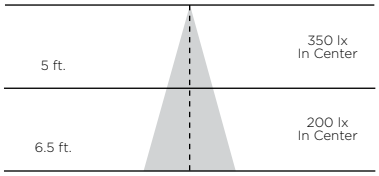

Beam Angle: 25°

Illumination

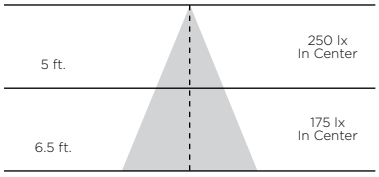

Beam Angle: 40°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
PAR20 6.5W LED - 50W Replacement															
S29400■	6.5PAR20/LED/25'/927/120V	6.5	120	PAR20	E26	SLVR	2700K	520	90	25°	2.99	2.44	25K	045923294006	24/6
S29401■	6.5PAR20/LED/25'/930/120V	6.5	120	PAR20	E26	SLVR	3000K	520	90	25°	2.99	2.44	25K	045923294013	24/6
S29402■	6.5PAR20/LED/25'/935/120V	6.5	120	PAR20	E26	SLVR	3500K	520	90	25°	2.99	2.44	25K	045923294020	24/6
S29403■	6.5PAR20/LED/25'/940/120V	6.5	120	PAR20	E26	SLVR	4000K	520	90	25°	2.99	2.44	25K	045923294037	24/6
S29404	6.5PAR20/LED/25'/950/120V	6.5	120	PAR20	E26	SLVR	5000K	520	90	25°	2.99	2.44	25K	045923294044	24/6
S29405■	6.5PAR20/LED/40'/927/120V	6.5	120	PAR20	E26	SLVR	2700K	520	90	40°	2.99	2.44	25K	045923294051	24/6
S29406■	6.5PAR20/LED/40'/930/120V	6.5	120	PAR20	E26	SLVR	3000K	520	90	40°	2.99	2.44	25K	045923294068	24/6
S29407■	6.5PAR20/LED/40'/935/120V	6.5	120	PAR20	E26	SLVR	3500K	520	90	40°	2.99	2.44	25K	045923294075	24/6
S29408■	6.5PAR20/LED/40'/940/120V	6.5	120	PAR20	E26	SLVR	4000K	520	90	40°	2.99	2.44	25K	045923294082	24/6
S29409	6.5PAR20/LED/40'/950/120V	6.5	120	PAR20	E26	SLVR	5000K	520	90	40°	2.99	2.44	25K	045923294099	24/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2723

PAR30/SN







PAR30/LN







Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
PAR30 Short Neck 12.5W LED - 75W Replacement															
S29410■	12.5PAR30/SN/LED/25'/927/120V	12.5	120	PAR30SN	E26	SLVR	2700K	1000	90	25°	3.70	3.74	25K	045923294105	12/6
S29411■	12.5PAR30/SN/LED/25'/930/120V	12.5	120	PAR30SN	E26	SLVR	3000K	1000	90	25°	3.70	3.74	25K	045923294112	12/6
S29412■	12.5PAR30/SN/LED/25'/935/120V	12.5	120	PAR30SN	E26	SLVR	3500K	1000	90	25°	3.70	3.74	25K	045923294129	12/6
S29413■	12.5PAR30/SN/LED/25'/940/120V	12.5	120	PAR30SN	E26	SLVR	4000K	1000	90	25°	3.70	3.74	25K	045923294136	12/6
S29414	12.5PAR30/SN/LED/25'/950/120V	12.5	120	PAR30SN	E26	SLVR	5000K	1000	90	25°	3.70	3.74	25K	045923294143	12/6
S29415■	12.5PAR30/SN/LED/40'/927/120V	12.5	120	PAR30SN	E26	SLVR	2700K	1000	90	40°	3.70	3.74	25K	045923294150	12/6
S29416■	12.5PAR30/SN/LED/40'/930/120V	12.5	120	PAR30SN	E26	SLVR	3000K	1000	90	40°	3.70	3.74	25K	045923294167	12/6
S29417■	12.5PAR30/SN/LED/40'/935/120V	12.5	120	PAR30SN	E26	SLVR	3500K	1000	90	40°	3.70	3.74	25K	045923294174	12/6
S29418■	12.5PAR30/SN/LED/40'/940/120V	12.5	120	PAR30SN	E26	SLVR	4000K	1000	90	40°	3.70	3.74	25K	045923294181	12/6
S29419	12.5PAR30/SN/LED/40'/950/120V	12.5	120	PAR30SN	E26	SLVR	5000K	1000	90	40°	3.70	3.74	25K	045923294198	12/6
S29420■	12.5PAR30/SN/LED/60'/927/120V	12.5	120	PAR30SN	E26	SLVR	2700K	1000	90	60°	3.70	3.74	25K	045923294204	12/6
S29421■	12.5PAR30/SN/LED/60'/930/120V	12.5	120	PAR30SN	E26	SLVR	3000K	1000	90	60°	3.70	3.74	25K	045923294211	12/6
S29422■	12.5PAR30/SN/LED/60'/935/120V	12.5	120	PAR30SN	E26	SLVR	3500K	1000	90	60°	3.70	3.74	25K	045923294228	12/6
S29423■	12.5PAR30/SN/LED/60'/940/120V	12.5	120	PAR30SN	E26	SLVR	4000K	1000	90	60°	3.70	3.74	25K	045923294235	12/6
S29424	12.5PAR30/SN/LED/60'/950/120V	12.5	120	PAR30SN	E26	SLVR	5000K	1000	90	60°	3.70	3.74	25K	045923294242	12/6
PAR30 Long Neck 12.5W LED - 75W Replacement															
S29425■	12.5PAR30/LN/LED/25'/927/120V	12.5	120	PAR30LN	E26	SLVR	2700K	1000	90	25°	4.57	3.74	25K	045923294259	12/6
S29426■	12.5PAR30/LN/LED/25'/930/120V	12.5	120	PAR30LN	E26	SLVR	3000K	1000	90	25°	4.57	3.74	25K	045923294266	12/6
S29427■	12.5PAR30/LN/LED/25'/935/120V	12.5	120	PAR30LN	E26	SLVR	3500K	1000	90	25°	4.57	3.74	25K	045923294273	12/6
S29428■	12.5PAR30/LN/LED/25'/940/120V	12.5	120	PAR30LN	E26	SLVR	4000K	1000	90	25°	4.57	3.74	25K	045923294280	12/6
S29429	12.5PAR30/LN/LED/25'/950/120V	12.5	120	PAR30LN	E26	SLVR	5000K	1000	90	25°	4.57	3.74	25K	045923294297	12/6
S29430■	12.5PAR30/LN/LED/40'/927/120V	12.5	120	PAR30LN	E26	SLVR	2700K	1000	90	40°	4.57	3.74	25K	045923294303	12/6
S29431■	12.5PAR30/LN/LED/40'/930/120V	12.5	120	PAR30LN	E26	SLVR	3000K	1000	90	40°	4.57	3.74	25K	045923294310	12/6
S29432■	12.5PAR30/LN/LED/40'/935/120V	12.5	120	PAR30LN	E26	SLVR	3500K	1000	90	40°	4.57	3.74	25K	045923294327	12/6
S29433■	12.5PAR30/LN/LED/40'/940/120V	12.5	120	PAR30LN	E26	SLVR	4000K	1000	90	40°	4.57	3.74	25K	045923294334	12/6
S29434	12.5PAR30/LN/LED/40'/950/120V	12.5	120	PAR30LN	E26	SLVR	5000K	1000	90	40°	4.57	3.74	25K	045923294341	12/6
S29435■	12.5PAR30/LN/LED/60'/927/120V	12.5	120	PAR30LN	E26	SLVR	2700K	1000	90	60°	4.57	3.74	25K	045923294358	12/6
S29436■	12.5PAR30/LN/LED/60'/930/120V	12.5	120	PAR30LN	E26	SLVR	3000K	1000	90	60°	4.57	3.74	25K	045923294365	12/6
S29437■	12.5PAR30/LN/LED/60'/935/120V	12.5	120	PAR30LN	E26	SLVR	3500K	1000	90	60°	4.57	3.74	25K	045923294372	12/6
S29438■	12.5PAR30/LN/LED/60'/940/120V	12.5	120	PAR30LN	E26	SLVR	4000K	1000	90	60°	4.57	3.74	25K	045923294389	12/6
S29439	12.5PAR30/LN/LED/60'/950/120V	12.5	120	PAR30LN	E26	SLVR	5000K	1000	90	60°	4.57	3.74	25K	045923294396	12/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2723

PAR38



Beam Angle: 25°

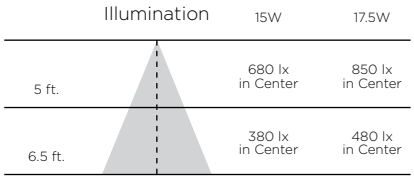

Beam Angle: 40°



Beam Angle: 60°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
PAR 38 15W LED - 90W Replacement															
S29440■	15PAR38/LED/25'/927/120V	15	120	PAR38	E26	SLVR	2700K	1200	90	25°	5.00	4.72	25K	045923294402	12/6
S29441■	15PAR38/LED/25'/930/120V	15	120	PAR38	E26	SLVR	3000K	1200	90	25°	5.00	4.72	25K	045923294419	12/6
S29442■	15PAR38/LED/25'/935/120V	15	120	PAR38	E26	SLVR	3500K	1200	90	25°	5.00	4.72	25K	045923294426	12/6
S29443■	15PAR38/LED/25'/940/120V	15	120	PAR38	E26	SLVR	4000K	1200	90	25°	5.00	4.72	25K	045923294433	12/6
S29444	15PAR38/LED/25'/950/120V	15	120	PAR38	E26	SLVR	5000K	1200	90	25°	5.00	4.72	25K	045923294440	12/6
S29445■	15PAR38/LED/40'/927/120V	15	120	PAR38	E26	SLVR	2700K	1200	90	40°	5.00	4.72	25K	045923294457	12/6
S29446■	15PAR38/LED/40'/930/120V	15	120	PAR38	E26	SLVR	3000K	1200	90	40°	5.00	4.72	25K	045923294464	12/6
S29447■	15PAR38/LED/40'/935/120V	15	120	PAR38	E26	SLVR	3500K	1200	90	40°	5.00	4.72	25K	045923294471	12/6
S29448■	15PAR38/LED/40'/940/120V	15	120	PAR38	E26	SLVR	4000K	1200	90	40°	5.00	4.72	25K	045923294488	12/6
S29449	15PAR38/LED/40'/950/120V	15	120	PAR38	E26	SLVR	5000K	1200	90	40°	5.00	4.72	25K	045923294495	12/6
S29450■	15PAR38/LED/60'/927/120V	15	120	PAR38	E26	SLVR	2700K	1200	90	60°	5.00	4.72	25K	045923294501	12/6
S29451■	15PAR38/LED/60'/930/120V	15	120	PAR38	E26	SLVR	3000K	1200	90	60°	5.00	4.72	25K	045923294518	12/6
S29452■	15PAR38/LED/60'/935/120V	15	120	PAR38	E26	SLVR	3500K	1200	90	60°	5.00	4.72	25K	045923294525	12/6
S29453■	15PAR38/LED/60'/940/120V	15	120	PAR38	E26	SLVR	4000K	1200	90	60°	5.00	4.72	25K	045923294532	12/6
S29454	15PAR38/LED/60'/950/120V	15	120	PAR38	E26	SLVR	5000K	1200	90	60°	5.00	4.72	25K	045923294549	12/6
PAR38 15W LED 2 Pack - Non-Dimmable - 90W Replacement															
S29457■	15PAR38/LED/60'/930/120V/ND/2P	15	120	PAR38	E26	SLVR	3000K	1200	90	60°	5.00	4.72	25K	045923294570	8-2pks
PAR38 17.5W LED - 120W Replacement															
S29455■	17.5PAR38/LED/40'/930/120V	17.5	120	PAR38	E26	SLVR	3000K	1400	90	40°	5.00	4.72	25K	045923294556	12/6
S29456■	17.5PAR38/LED/40'/940/120V	17.5	120	PAR38	E26	SLVR	4000K	1400	90	40°	5.00	4.72	25K	045923294563	12/6

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2723

PAR 20, 30 & 38 LAMPS - ECONO SERIES

Features:

- 90 CRI - Superior light
- Indoor/outdoor
- Dimmable
- 40˚ Beam angle
- 3000K and 4000K

APPLICATIONS

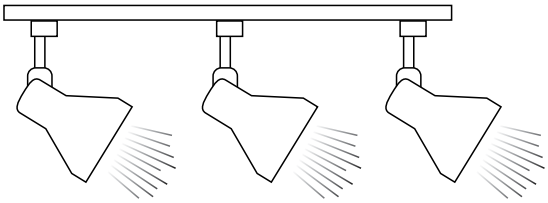

Track



Recessed

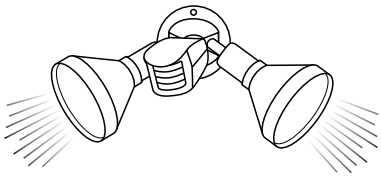

Security

DIMENSIONS

PAR20

PAR30/SN

PAR30/LN

PAR38

Illumination



Beam Angle: 40°

Illumination



Beam Angle: 40°

Illumination



Beam Angle: 40°

Illumination



Beam Angle: 40°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
PAR20 - 50W Replacement															
S22210	5.5PAR20/LED/930/FL/120V	5.5	120	PAR20	E26	WH	3000K	500	90	40°	3.19	2.48	15K	045923210433	24/6
S22211	5.5PAR20/LED/940/FL/120V	5.5	120	PAR20	E26	WH	4000K	500	90	40°	3.19	2.48	15K	045923210440	24/6
PAR30 - 75W Replacement															
S22212	8.5PAR30S/LED/930/FL/120V	8.5	120	PAR 30S	E26	WH	3000K	700	90	40°	3.35	3.74	15K	045923210457	12/6
S22213	8.5PAR30S/LED/940/FL/120V	8.5	120	PAR 30S	E26	WH	4000K	700	90	40°	3.35	3.74	15K	045923210464	12/6
S22214	8.5PAR30L/LED/930/FL/120V	8.5	120	PAR 30L	E26	WH	3000K	700	90	40°	4.41	3.74	15K	045923210471	12/6
S22215	8.5PAR30L/LED/940/FL/120V	8.5	120	PAR 30L	E26	WH	4000K	700	90	40°	4.41	3.74	15K	045923210488	12/6
S22218	8.5PAR30L/LED/930/FL/120V/2PK	8.5	120	PAR 30L	E26	WH	3000K	700	90	40°	4.41	3.74	15K	045923210518	8-2pks
PAR38 - 90W Replacement															
S22216	11.5PAR38/LED/930/FL/120V	11.5	120	PAR 38	E26	WH	3000K	1000	90	40°	5.12	4.76	15K	045923210495	12/6
S22217	11.5PAR38/LED/940/FL/120V	11.5	120	PAR 38	E26	WH	4000K	1000	90	40°	5.12	4.76	15K	045923210501	12/6
S22219	11.5PAR38/LED/930/FL/120V/2PK	11.5	120	PAR 38	E26	WH	3000K	1000	90	40°	5.12	4.76	15K	045923210525	8-2pks

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2490

LED PAR38 COLORS

Features:

- High efficiency—uses only 11.5 Watts
- Improved color
- Superior design
- Indoor/outdoor
- Dimmable



Beam Angle: 90°

DIMMABLE ^ ENCLOSED FIXTURE WET LOCATION c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Lens Finish	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S29480	11.5PAR38/LED/90'/RED	11.5	120	PAR38	E26	RED	80	90°	5.20	4.75	15K	045923294808	12/6
S29481	11.5PAR38/LED/90'/GREEN	11.5	120	PAR38	E26	GRN	80	90°	5.20	4.75	15K	045923294815	12/6
S29482	11.5PAR38/LED/90'/BLUE	11.5	120	PAR38	E26	BLUE	80	90°	5.20	4.75	15K	045923294822	12/6
S29483	11.5PAR38/LED/90'/AMBER	11.5	120	PAR38	E26	AMB	80	90°	5.20	4.75	15K	045923294839	12/6
S29484	11.5PAR38/LED/90'/YELLOW	11.5	120	PAR38	E26	YLW	80	90°	5.20	4.75	15K	045923294846	12/6

*Visit www.satco.com for compatible dimmers. ^For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2794

HIGH LUMEN LED
PAR 30 & PAR 38 LAMPS

Features:

- Silver reflector
- Wet location - indoor/outdoor
- 120V Dimmable version
- 120V -277V Range voltage / Non-dimmable version
- Multiple CCT options

Applications:

- Indoor residential and commercial lighting
- Down lighting
- Accent lighting
- Pendant lighting

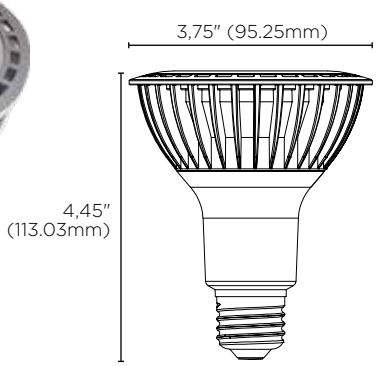

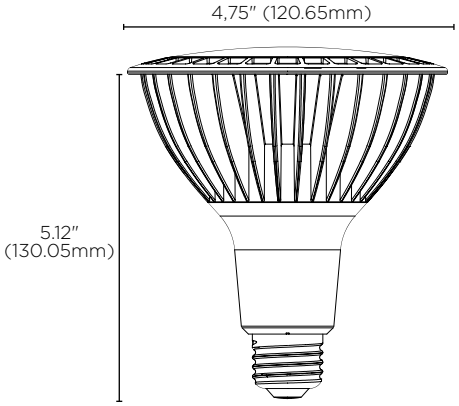

PAR30
Illumination



Beam Angle: 40°

PAR38
Illumination

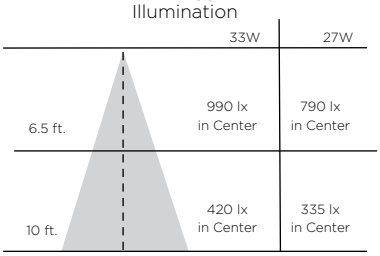

Beam Angle: 40°

▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant · INDOOR OUTDOOR · † DIMMABLE · WET LOCATION · ^ ENCLOSED FIXTURE · c UL LISTED US · RoHS COMPLIANT · ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
120 VOLT Dimmable															
S22240†	20.5PAR30LN/LED/927/HL/120V/FL	20.5	120	PAR30LN	E26	SLVR	2700K	1800	90	40°	4.45	3.75	25K	045923222405	12/6
S22241†	20.5PAR30LN/LED/930/HL/120V/FL	20.5	120	PAR30LN	E26	SLVR	3000K	1800	90	40°	4.45	3.75	25K	045923222412	12/6
S22242†	20.5PAR30LN/LED/940/HL/120V/FL	20.5	120	PAR30LN	E26	SLVR	4000K	1800	90	40°	4.45	3.75	25K	045923222429	12/6
S22243†	20.5PAR30LN/LED/950/HL/120V/FL	20.5	120	PAR30LN	E26	SLVR	5000K	1800	90	40°	4.45	3.75	25K	045923222436	12/6
S22250†	33PAR38/LED/927/HL/120V/FL/D	33	120	PAR38	E26	SLVR	2700K	3000	90	40°	5.12	4.75	25K	045923222504	12/6
S22251†	33PAR38/LED/930/HL/120V/FL/D	33	120	PAR38	E26	SLVR	3000K	3000	90	40°	5.12	4.75	25K	045923222511	12/6
S22252†	33PAR38/LED/940/HL/120V/FL/D	33	120	PAR38	E26	SLVR	4000K	3000	90	40°	5.12	4.75	25K	045923222528	12/6
S22253†	33PAR38/LED/950/HL/120V/FL/D	33	120	PAR38	E26	SLVR	5000K	3000	90	40°	5.12	4.75	25K	045923222535	12/6
120-277 VOLT Non-Dimmable															
S29764▲	21.5PAR30LN/LED/930/HL/120-277	21.5	120-277	PAR30LN	E26	SLVR	3000K	1800	90	40°	4.45	3.74	25K	045923297649	12/6
S29765▲	21.5PAR30LN/LED/940/HL/120-277	21.5	120-277	PAR30LN	E26	SLVR	4000K	1800	90	40°	4.45	3.74	25K	045923297656	12/6
S29760▲	27PAR38/LED/930/HL/120-277V	27	120-277	PAR38	E26	SLVR	3000K	2400	90	40°	5.12	4.75	25K	045923297601	12/6
S29761▲	27PAR38/LED/940/HL/120-277V	27	120-277	PAR38	E26	SLVR	4000K	2400	90	40°	5.12	4.75	25K	045923297618	12/6

Consult the Satco website for a complete, up to date list on compatible dimmers.
To prevent early lamp failure, lamp should only be installed in operating environments ranging from a minimum of -4°F (-20°C) to a maximum of 113°F (+45°C)
^ For minimum compartment size of enclosed fixture visit www.satco.com

LED PAR16 LAMPS

Features:

- 45 Watt & 60Watt Halogen PAR16 lamp replacement uses only 4-6.5 Watts
- Dimmable
- Damp location
- Approved for totally enclosed fixtures^
- Long life—25,000 hours
- 5 Year warranty



Beam Angle: 40°

Illumination at 3000K

	4.5W	6.5W
1m	525 lx in Center	730 lx in Center
2m	130 lx in Center	185 lx in Center

Beam Angle: 40°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9386	4.5PAR16/LED/40'/3000K/120V	4.5	120	PAR16	E26	WH	3000K	360	80	40°	2.88	2.00	25K	045923093869	48/12
S9387	4.5PAR16/LED/40'/5000K/120V	4.5	120	PAR16	E26	WH	5000K	360	80	40°	2.88	2.00	25K	045923093876	48/12
S9388*	6.5PAR16/LED/40'/3000K/120V	6.5	120	PAR16	E26	WH	3000K	500	80	40°	2.88	2.00	25K	045923093883	48/12
S9389	6.5PAR16/LED/40'/5000K/120V	6.5	120	PAR16	E26	WH	5000K	500	80	40°	2.88	2.00	25K	045923093890	48/12
90 CRI—CEC/T20															
S8585*	4PAR16/LED/40'/3K/120V/90CRI	4	120	PAR16	E26	WH	3000K	360	90+	40°	2.88	2.00	25K	045923085857	48/12

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA1744

1.6W & 3W, 12V LED MR11 LAMPS

Features:

- 20 Watt MR11 replacement, uses up to 3 Watts
- Damp location
- Approved for totally enclosed fixtures^
- Long life—25,000 hours
- 3 Year warranty



Beam Angle: 40°



Beam Angle: 25°

3MR11

1.6MR11

Illumination

	2700K	3000K	4000K	5000K
1m	700 lx in Center	730 lx in Center	760 lx in Center	800 lx in Center
2m	175 lx in Center	183 lx in Center	190 lx in Center	200 lx in Center

Beam Angle: 25°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9550†	1.6MR11/LED/40'/3000K/12V	1.6	12	MR11	G4	CL	3000K	200	80	40°	1.56	1.31	25K	045923095504	200/20
S9551†	1.6MR11/LED/40'/5000K/12V	1.6	12	MR11	G4	CL	5000K	200	80	40°	1.56	1.31	25K	045923095511	200/20
S9280	3MR11/LED/25'/2700K/12V	3	12	MR11	GU4	WH	2700K	210	80	25°	1.50	1.38	25K	045923092800	48/12
S9281	3MR11/LED/25'/3000K/12V	3	12	MR11	GU4	WH	3000K	210	80	25°	1.50	1.38	25K	045923092817	48/12
S9282	3MR11/LED/25'/4000K/12V	3	12	MR11	GU4	WH	4000K	210	80	25°	1.50	1.38	25K	045923092824	48/12
S9283	3MR11/LED/25'/5000K/12V	3	12	MR11	GU4	WH	5000K	210	80	25°	1.50	1.38	25K	045923092831	48/12
S8603	3MR11/LED/25'/3000K/12V	3	12	MR11	GU4	WH	3000K	210	80	25°	1.47	1.38	25K	045923086038	12/1 cd

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA1679

LED AR111 LAMPS

Features:

- Direct replacement for halogen lamps
- High efficiency–less heat
- 7W and 12W options
- Damp location
- Long life–30,000 hours

ILLUMINATION 7W



Beam Angle: 12°

ILLUMINATION 7W



Beam Angle: 36°

ILLUMINATION 12W



Beam Angle: 12°

ILLUMINATION 12W



Beam Angle: 36°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S12244	7AR111/LED/830/SP12/12V	7	12	AR111	G53	WH	3000K	520	80	12°	2.60	4.37	30K	045923122446	24/6
S12245	7AR111/LED/830/FL36/12V	7	12	AR111	G53	WH	3000K	600	80	36°	2.60	4.37	30K	045923122453	24/6
S12246	12AR111/LED/830/SP12/12V	12	12	AR111	G53	WH	3000K	850	80	12°	2.60	4.37	30K	045923122460	24/6
S12247	12AR111/LED/830/FL36/12V	12	12	AR111	G53	WH	3000K	900	80	36°	2.60	4.37	30K	045923122477	24/6

Non-dimmable

Product sheet SA2610

LED MR16 LAMPS

Features:

- Dimmable
- Approved for totally enclosed fixtures^
- 12V and 24V
- Long life—25,000 hours
- ENERGY STAR certified*
- 5 Year warranty

Applications:

- Indoor residential and commercial lighting
- Down lighting
- Accent lighting
- Pendant lighting

3MR16

6.5W MR16

8W MR16

■ Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant ▲ Efficiency Standards T20 California Title20 Residential and Non-Residential Compliant DIMMABLE DAMP LOCATION ^ ENCLOSED FIXTURE c UL us LISTED * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9552	3MR16/LED/40'/3000K/12V	3	12	MR16	GU5.3	CL	3000K	330	80	40°	2.00	2.00	25K	045923095528	200/20
S9553	3MR16/LED/40'/5000K/12V	3	12	MR16	GU5.3	CL	5000K	330	80	40°	2.00	2.00	25K	045923095535	200/20
80 CRI - 50W Replacement - CEC/T20▲															
S9490*	6.5MR16/LED/25'/27K/12V	6.5	12	MR16	GU5.3	GRAY	2700K	500	80	25°	1.75	2.00	25K	045923094903	48/12
S9491*	6.5MR16/LED/25'/30K/12V	6.5	12	MR16	GU5.3	GRAY	3000K	500	80	25°	1.78	2.00	25K	045923094910	48/12
S9492	6.5MR16/LED/25'/35K/12V	6.5	12	MR16	GU5.3	GRAY	3500K	500	80	25°	1.78	2.00	25K	045923094927	48/12
S9493	6.5MR16/LED/25'/40K/12V	6.5	12	MR16	GU5.3	GRAY	4000K	500	80	25°	1.78	2.00	25K	045923094934	48/12
S9494	6.5MR16/LED/25'/50K/12V	6.5	12	MR16	GU5.3	GRAY	5000K	500	80	25°	1.78	2.00	25K	045923094941	48/12
S9495*	6.5MR16/LED/40'/27K/12V	6.5	12	MR16	GU5.3	GRAY	2700K	500	80	40°	1.78	2.00	25K	045923094958	48/12
S9496*	6.5MR16/LED/40'/30K/12V	6.5	12	MR16	GU5.3	GRAY	3000K	500	80	40°	1.78	2.00	25K	045923094965	48/12
S9497*	6.5MR16/LED/40'/35K/12V	6.5	12	MR16	GU5.3	GRAY	3500K	500	80	40°	1.78	2.00	25K	045923094972	48/12
S9498*	6.5MR16/LED/40'/40K/12V	6.5	12	MR16	GU5.3	GRAY	4000K	500	80	40°	1.78	2.00	25K	045923094989	48/12
S9499*	6.5MR16/LED/40'/50K/12V	6.5	12	MR16	GU5.3	GRAY	5000K	500	80	40°	1.78	2.00	25K	045923094996	48/12
24V - 50W Replacement															
S11340	6MR16/LED/40'/827/24V AC/DC	6	24	MR16	GU5.3	GRAY	2700K	550	80	40°	1.78	1.97	25K	045923113406	48/12
S11341	6MR16/LED/40'/830/24V AC/DC	6	24	MR16	GU5.3	GRAY	3000K	550	80	40°	1.78	1.97	25K	045923113413	48/12
S11342	6MR16/LED/40'/840/24V AC/DC	6	24	MR16	GU5.3	GRAY	4000K	550	80	40°	1.78	1.97	25K	045923113420	48/12
S11343	6MR16/LED/40'/850/24V AC/DC	6	24	MR16	GU5.3	GRAY	5000K	550	80	40°	1.78	1.97	25K	045923113437	48/12
90 CRI															
S11334■	6.5MR16/LED/25'/927/12V	6.5	12	MR16	GU5.3	GRAY	2700K	450	90	25°	1.77	1.97	25K	045923113345	48/12
S11335■	6.5MR16/LED/25'/930/12V	6.5	12	MR16	GU5.3	GRAY	3000K	450	90	25°	1.77	1.97	25K	045923113352	48/12
S11336■	6.5MR16/LED/40'/927/12V	6.5	12	MR16	GU5.3	GRAY	2700K	450	90	40°	1.77	1.97	25K	045923113369	48/12
S9616*■	6.5MR16/LED/40'/930/12V	6.5	12	MR16	GU5.3	GRAY	3000K	450	90	40°	1.78	2.00	25K	045923096167	48/12
Single Optic - 75W Replacement - CEC/T20▲															
S8635■	8MR16/LED/15'/27K/90CRI/12V	8	12	MR16	GU5.3	GRAY	2700K	490	90	15°	1.88	2.00	25K	045923086359	48/12
S8636■	8MR16/LED/15'/30K/90CRI/12V	8	12	MR16	GU5.3	GRAY	3000K	490	90	15°	1.88	2.00	25K	045923086366	48/12
S8637■	8MR16/LED/15'/35K/90CRI/12V	8	12	MR16	GU5.3	GRAY	3500K	490	90	15°	1.88	2.00	25K	045923086373	48/12
S8638■	8MR16/LED/15'/40K/90CRI/12V	8	12	MR16	GU5.3	GRAY	4000K	490	90	15°	1.88	2.00	25K	045923086380	48/12
S8639	8MR16/LED/15'/50K/90CRI/12V	8	12	MR16	GU5.3	GRAY	5000K	490	90	15°	1.88	2.00	25K	045923086397	48/12
S8640*■	8MR16/LED/40'/27K/90CRI/12V	8	12	MR16	GU5.3	GRAY	2700K	490	90	40°	1.88	2.00	25K	045923086403	48/12
S8641*■	8MR16/LED/40'/30K/90CRI/12V	8	12	MR16	GU5.3	GRAY	3000K	490	90	40°	1.88	2.00	25K	045923086410	48/12
S8642■	8MR16/LED/40'/35K/90CRI/12V	8	12	MR16	GU5.3	GRAY	3500K	490	90	40°	1.88	2.00	25K	045923086427	48/12
S8643■	8MR16/LED/40'/40K/90CRI/12V	8	12	MR16	GU5.3	GRAY	4000K	490	90	40°	1.88	2.00	25K	045923086434	48/12
S8644	8MR16/LED/40'/50K/90CRI/12V	8	12	MR16	GU5.3	GRAY	5000K	490	90	40°	1.88	2.00	25K	045923086441	48/12

All 12V MR16 lamps are compatible with electronic and magnetic transformers. Visit www.satco.com for compatibility information and warranty details. ^ For minimum compartment size of enclosed fixture visit www.satco.com
■ Also T24 compliant..

Product sheet SA1902

MR16 GU10 BASE LED LAMPS

Features:

- Direct replacement for Halogen lamps
- 4.5W = 35 Watts
- 6.5W = 50 Watts – 25° (new) and 40°
- Dimmable
- Damp location
- Approved for enclosed fixtures^
- Long life - 25,000 hours
- High efficiency / environmentally friendly
- Innovative design
- No UV or IR radiation
- 5 year warranty / 10 hrs. per day



Beam Angle: 40°

Illumination	4.5W	6.5W
3.25 ft.	565 lx in Center	760 lx in Center
6.5 ft.	141 lx in Center	190 lx in Center

Beam Angle : 40°



Beam Angle: 25°

Illumination	6.5W
3.25 ft.	475 lx in Center
6.5 ft.	118 lx in Center

Beam Angle : 25°

▲ Efficiency Standards T20 California Title 20 Residential and Non-Residential Compliant | DIMMABLE | DAMP LOCATION | ^ ENCLOSED FIXTURE | c UL us LISTED | * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9380*	4.5MR16/LED/40'/30K/120V/GU10	4.5	120	MR16	GU10	WH	3000K	360	80	40°	2.19	2.00	25K	045923093807	48/12
S9381	4.5MR16/LED/40'/50K/120V/GU10	4.5	120	MR16	GU10	WH	5000K	360	80	40°	2.19	2.00	25K	045923093814	48/12
S8676	6.5MR16/LED/25'/27K/120V/GU10	6.5	120	MR16	GU10	WH	2700K	500	80	25°	2.28	1.97	25K	045923086762	48/12
S8677	6.5MR16/LED/25'/30K/120V/GU10	6.5	120	MR16	GU10	WH	3000K	500	80	25°	2.28	1.97	25K	045923086779	48/12
S8678	6.5MR16/LED/25'/40K/120V/GU10	6.5	120	MR16	GU10	WH	4000K	500	80	25°	2.28	1.97	25K	045923086786	48/12
S8679	6.5MR16/LED/25'/50K/120V/GU10	6.5	120	MR16	GU10	WH	5000K	500	80	25°	2.28	1.97	25K	045923086793	48/12
S9382	6.5MR16/LED/40'/27K/120V/GU10	6.5	120	MR16	GU10	WH	2700K	500	80	40°	2.19	2.00	25K	045923093821	48/12
S9383*	6.5MR16/LED/40'/30K/120V/GU10	6.5	120	MR16	GU10	WH	3000K	500	80	40°	2.19	2.00	25K	045923093838	48/12
S9384	6.5MR16/LED/40'/40K/120V/GU10	6.5	120	MR16	GU10	WH	4000K	500	80	40°	2.19	2.00	25K	045923093845	48/12
S9385*	6.5MR16/LED/40'/50K/120V/GU10	6.5	120	MR16	GU10	WH	5000K	500	80	40°	2.19	2.00	25K	045923093852	48/12
90 CRI—CEC/T20▲															
S8588*	6.5MR16/LED/40'/27K/90CRI/GU10	6.5	120	MR16	GU10	WH	2700K	450	90	40°	2.19	2.00	25K	045923085888	48/12
S8589*	6.5MR16/LED/40'/30K/90CRI/GU10	6.5	120	MR16	GU10	WH	3000K	450	90+	40°	2.19	2.00	25K	045923085895	48/12

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA1729

CARDED LED MR LAMPS

Features:

- Direct replacement for Halogen lamps
- 50W MR16
- 20W MR11
- Dimmable
- Damp location
- Approved for totally enclosed fixtures^
- Long life - 25,000 hours
- 3 Year warranty

2MR11

3MR11

6.5MR16

6.5MR16

7MR16

6.5MR16

† DIMMABLE · DAMP LOCATION · ^ ENCLOSED FIXTURE · * ENERGY STAR

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S8603	3MR11/LED/25'/3000K/12V	3	12	MR11	GU4	WH	3000K	210	80	25°	1.47	1.38	25K	045923086038	12/1 cd
S8604*†	6.5MR16/LED/40'/30K/120V/GU10	6.5	120	MR16	GU10	WH	3000K	500	80	40°	2.16	2.00	25K	045923086045	12/1 cd
S8605*†	6.5MR16/LED/40'/30K/12V	6.5	12	MR16	GU5.3	GRAY	3000K	500	80	40°	1.78	2.00	25K	045923086052	12/1 cd
S21741	2MR11/LED/3K/36D/12V/2PK/ND	2	12	MR11	GU4	WH	3000K	100	80	36°	1.69	1.37	15K	045923217418	24/2 cd
S21742	7MR16/LED/3K/40D/12V/2PK	7	12	MR16	GU5.3	WH	3000K	500	80	40°	2.07	1.97	25K	045923217425	24/2 cd
S21743*†	6.5MR16/LED/3K/40D/GU10/2PK	6.5	120	MR16	GU10	WH	3000K	500	80	40°	2.20	1.97	25K	045923217432	24/2 cd

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2674

LED ELEVATOR LAMPS

Features:

- Direct replacement for 20W Halogen lamps
- Elevators, lobbies
- Familiar look & performance
- Improved thermal management
- GBF/1383 LED Direct replacement
- Long life—15,000 hours



S29004



S29005



Beam Angle: 31°

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S29004	3WLED/1383/ELEVATOR/12V AC/DC	3	12	R12	BA15A	GRAY	3000K	220	80	31°	2.50	1.38	15K	045923290046	48/12
S29005	3WLED/GBF/ELEVATOR/12V AC/DC	3	12	ALR12	BA15D	GRAY	3000K	220	80	31°	1.77	1.38	15K	045923290053	48/12

Indoor use only. Not for use in totally enclosed fixtures.

Product sheet SA2370

LED MR16 E26 BASE LAMPS

Features:

- Direct replacement for 50 Watt Halogen lamps — uses only 6.5 Watts
- Innovative design
- Dimmable
- Damp location
- Approved for enclosed fixtures^
- Long life - 25,000 hours
- No UV or IR radiation
- 5 year warranty

Applications:

- Indoor residential and commercial lighting
- Downlighting
- Accent lighting
- Pendant lighting



Beam Angle: 40°



CCT 5000K / Beam Angle: 40°

DIMMABLE | DAMP LOCATION | ENCLOSED FIXTURE^ | c UL us LISTED

Item	Description	W	V	Bulb Shape	Base	Housing Finish	CCT	Lm	CRI	Beam	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9980	6.5MR16/E26/LED/40'/27K/120V	6.5	120	MR16	E26	WH	2700K	500	80	40°	2.19	2.00	25K	045923099809	48/12
S9981	6.5MR16/E26/LED/40'/30K/120V	6.5	120	MR16	E26	WH	3000K	500	80	40°	2.19	2.00	25K	045923099816	48/12
S9982	6.5MR16/E26/LED/40'/40K/120V	6.5	120	MR16	E26	WH	4000K	500	80	40°	2.19	2.00	25K	045923099823	48/12
S9983	6.5MR16/E26/LED/40'/50K/120V	6.5	120	MR16	E26	WH	5000K	500	80	40°	2.19	2.00	25K	045923099830	48/12

^For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2556

SILICON LED REPLACEMENTS FOR HALOGEN G4, G6.35, G8 & G9 LAMPS

Features:

- Solid state LED lighting
- High efficacy
- Omni-directional light
- Dimmable
- Long life—25,000 hours
- Approved for enclosed fixtures^

G4

G6.35

G8

G9

G9

G9



Beam Angle: 360°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
G4 Bi-Pin														
S9542	LED 1.6W JC/G4 12V 3000K 200L	1.6	12	T3	G4	CL	3000K	200	80	1.44	0.38	25K	045923095429	200/20
S8600	LED 1.6W JC/G4 12V 3000K/CARD	1.6	12	T3	G4	CL	3000K	200	80	1.44	0.38	25K	045923086007	48/12
S9543	LED 1.6W JC/G4 12V 5000K 200L	1.6	12	T3	G4	CL	5000K	200	80	1.44	0.38	25K	045923095436	200/20
G6.35														
S9544	LED 3W JC/G6.35 12V 3000K 300L	3	12	T4	G6.35	CL	3000K	300	80	1.63	0.50	25K	045923095443	200/20
S8601	LED 3W JC/G6.35 12V 3K 300L/CD	3	12	T4	G6.35	CL	3000K	300	80	1.63	0.50	25K	045923086014	48/12
S9545	LED 3W JC/G6.35 12V 5000K 300L	3	12	T4	G6.35	CL	5000K	300	80	1.63	0.50	25K	045923095450	200/20
G8														
S28680	LED/4W/JCG8/CL/3K/1	4	120-130	T4	G8	CL	3000K	480	80	2.00	0.50	25K	045923286803	200/20
S28681	LED/4W/JC/G8/CL/5K/120-130V	4	120-130	T4	G8	CL	5000K	480	80	2.00	0.50	25K	045923286810	200/20
G9														
S9546	LED 1.6W JCD/G9 120V 3000K	1.6	120	T4	G9	CL	3000K	200	80	1.88	0.50	25K	045923095467	200/20
S9547	LED 1.6W JCD/G9 120V 5000K	1.6	120	T4	G9	CL	5000K	200	80	1.88	0.50	25K	045923095474	200/20
S29547	LED4W JCD/G9 120-130V 2700K	4	120-130	T4	G9	CL	2700K	400	80	2.38	0.50	25K	045923295478	200/20
S29548	LED4W JCD/G9 120-130V 3000K	4	120-130	T4	G9	CL	3000K	480	80	2.38	0.50	25K	045923295485	200/20
S28602	LED JCD 4W G9 120-130V 3K DIM/CARD	4	120-130	T4	G9	CL	3000K	480	80	2.38	0.50	25K	045923286025	48/12
S28682	LED/4W/JCD/G9/FR/3K/120-130V	4	120-130	T4	G9	FR	3000K	460	80	2.38	0.00	25K	045923286827	200/20
S29549	LED4W JCD/G9 120-130V 5000K	4	120-130	T4	G9	CL	5000K	480	80	2.38	0.50	25K	045923295492	200/20
S28683	LED/4W/JCD/G9/FR/5K/120-130V	4	120-130	T4	G9	FR	5000K	460	80	2.38	0.00	25K	045923286834	200/20
S29697	LED4W JCD/G9/120-130V/3K/90CRI	4	120-130	T4	G9	CL	3000K	360	90	2.38	0.50	25K	045923296970	200/20

^For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2229

SILICON LED REPLACEMENTS FOR HALOGEN E11, E12, BA15D & BA15S LAMPS

Features:

- Solid state LED lighting
- High efficacy
- Omni-directional light
- Dimmable
- Long life—25,000 hours

E11 Mini Can

E11 Mini Can

E12

E12

BA15D

BA15D

BA15S



Beam Angle: 360°

DIMMABLE | DAMP LOCATION | ENCLOSED FIXTURE ^ | 360° BEAM

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
E11 Mini Can														
S28684	LED/4W/E11/MC/CL/3K/120-130V	4	120-130	T4	E11	CL	3000K	480	80	2.38	0.75	25K	045923286841	200/20
S28685	LED/4W/E11/MC/CL/5K/120-130V	4	120-130	T4	E11	CL	5000K	480	80	2.38	0.75	25K	045923286858	200/20
S28686	LED/4W/E11/MC/FR/3K/120-130V	4	120-130	T4	E11	FR	3000K	460	80	2.38	0.75	25K	045923286865	200/20
S28687	LED/4W/E11/MC/CL/5K/120-130V	4	120-130	T4	E11	FR	5000K	460	80	2.38	0.75	25K	045923286872	200/20
E12														
S11210	LED/4W/E12/CL/3K/120-130V	4	120-130	T4	E12	CL	3000K	480	80	2.31	0.75	25K	045923112102	200/20
S11211	LED/4W/E12/CL/5K/120-130V	4	120-130	T4	E12	CL	5000K	480	80	2.31	0.75	25K	045923112119	200/20
S11212	LED/4W/E12/FR/3K/120-130V	4	120-130	T4	E12	FR	3000K	460	80	2.31	0.75	25K	045923112126	200/20
S11213	LED/4W/E12/FR/5K/120-130V	4	120-130	T4	E12	FR	5000K	460	80	2.31	0.75	25K	045923112133	200/20
BA15D														
S11214	LED/4W/BA15D/CL/3K/120-130V	4	120-130	T4	BA15D	CL	3000K	480	80	2.50	0.75	25K	045923112140	200/20
S11215	LED/4W/BA15D/CL/5K/120-130V	4	120-130	T4	BA15D	CL	5000K	480	80	2.50	0.75	25K	045923112157	200/20
S11216	LED/4W/BA15D/FR/3K/120-130V	4	120-130	T4	BA15D	FR	3000K	460	80	2.50	0.75	25K	045923112164	200/20
S11217	LED/4W/BA15D/FR/5K/120-130V	4	120-130	T4	BA15D	FR	5000K	460	80	2.50	0.75	25K	045923112171	200/20
BA15S														
S8688	LED/3W/BA15S/CL/3K/12V	3	12	T4	BA15S	FR	3000K	330	80	1.63	0.75	25K	045923086885	200/20
S8689	LED/3W/BA15S/CL/5K/12V	3	12	T4	BA15S	FR	5000K	330	80	1.63	0.75	25K	045923086892	200/20

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2562

LED COLORQUICK®
DOWNLIGHT RETROFITS

Features:

- 5 Selectable CCT settings
- SKU reducer - 35 products, only 7 SKU's
- 3 Styles: Round, Square & Gimbal
- 2 Sizes: for 4" and 5/6" standard recessed housing
- Wet location (baffles)
  Damp location (gimbals)
- ENERGY STAR® certified
- T20/T24 Compliant
- Long life—50,000 Hours
- 5 Year warranty

Color changeable - 5 color temperature settings

ColorQuick®
Selectable Color Technology



ROUND

4"

5-6"

SQUARE

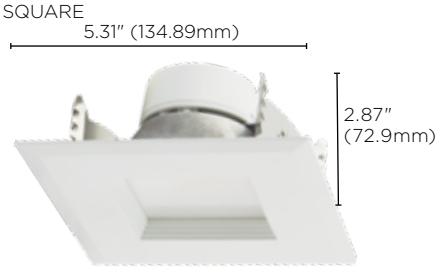

4"

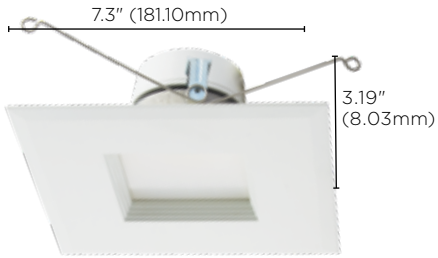

5-6"

E26 Adapter included (S9001)
GU10 Adapter sold separately (S9000)
GU24 Adapter sold separately (S8999)

GIMBAL

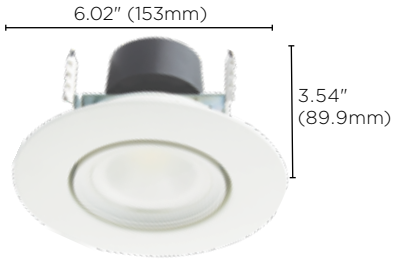

4"

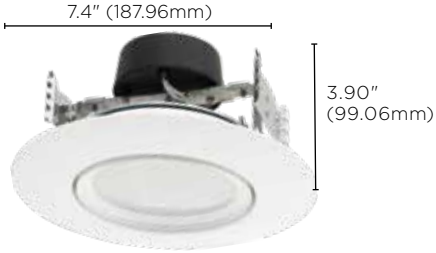

5-6"

Gimbal Baffle

Item	Description	W	V	CRI	CCT	Lm	Beam	Trim Finish	Trim Size (in.)	Life (hrs.)	UPC	Pack
Round												
S11800	7WLED/RDL/4/ADJ-CCT/120V	7	120	90	2700K/3000K/3500K/4000K/5000K	600	90°	WH	5.31	50K	045923118005	16/4
S11801	9WLED/RDL/5-6/ADJ-CCT/120V	9	120	90	2700K/3000K/3500K/4000K/5000K	800	90°	WH	7.40	50K	045923118012	8
S11825	13.5WLED/RDL/5-6/CCT-SEL/120V	13.5	120	90	2700K/3000K/3500K/4000K/5000K	1200	100°	WH	7.40	50K	045923118258	8
Square												
S11820	6.5WLED/RDL/SQ/4/CCT-SEL/120V	6.5	120	90	2700K/3000K/3500K/4000K/5000K	600	90°	WH	5.31	50K	045923118203	24
S11821	11.5WLED/RDL/SQ/5-6/CCT-SEL	11.5	120	90	2700K/3000K/3500K/4000K/5000K	1000	90°	WH	7.13	50K	045923118210	12
Gimbal												
S11822	7.5WLED/DIR/4/60'/CCT-SEL/120V	7.5	120	90	2700K/3000K/3500K/4000K/5000K	600	60°	WH	6.02	50K	045923118227	8
S11824	10.5WLED/DIR/5-6/90'/CCT-SEL	10.5	120	90	2700K/3000K/3500K/4000K/5000K	800	90°	WH	7.40	50K	045923118241	8

Product sheet SA2740

LED COLORQUICK® DOWNLIGHT RETROFITS IN BRONZE, BLACK & BRUSHED NICKEL

Features:

- 5 Selectable CCT settings
- 3 New trim finishes—Black, Bronze and Brushed Nickel
- 2 Sizes – 4" and 5/6" standard recessed housing
- Wet location
- Dimmable
- ENERGY STAR® certified
- Long life - 50,000 hours

Color changeable - 5 color temperature settings

ColorQuick®

Selectable Color Technology



4" BLACK

5-6" BLACK

E26 Adapter included (S9001)
GU10 Adapter sold separately (S9000)
GU24 Adapter sold separately (S8999)

4" BRUSHED NICKEL

5-6" BRUSHED NICKEL

4" BRONZE

5-6" BRONZE

Item	Description	W	V	CRI	CCT	Lm	Beam	Trim Finish	Trim Size (in.)	Life (hrs.)	UPC	Pack
S11832	7WLED/RDL/4/CCT-SEL/120V/BL	7	120	90	2700K/3000K/3500K/4000K/5000K	600	90°	BLK	5.31	50K	045923118326	16
S11833	7WLED/RDL/4/CCT-SEL/120V/BN	7	120	90	2700K/3000K/3500K/4000K/5000K	600	90°	BR NKL	5.31	50K	045923118333	16
S11834	7WLED/RDL/4/CCT-SEL/120V/BZ	7	120	90	2700K/3000K/3500K/4000K/5000K	600	90°	BRZ	5.31	50K	045923118340	16
S11835	9WLED/RDL/5-6/CCT-SEL/120V/BL	9	120	90	2700K/3000K/3500K/4000K/5000K	800	90°	BLK	7.41	50K	045923118357	8
S11836	9WLED/RDL/5-6/CCT-SEL/120V/BN	9	120	90	2700K/3000K/3500K/4000K/5000K	800	90°	BR NKL	7.41	50K	045923118364	8
S11837	9WLED/RDL/5-6/CCT-SEL/120V/BZ	9	120	90	2700K/3000K/3500K/4000K/5000K	800	90°	BRZ	7.41	50K	045923118371	8

Product sheet SA2380

LED DOWNLIGHT RETROFIT VALUE 6-PACK

Features:

- 6 Piece Pack for Value & Convenience
- Easy to Install
- 5/6" 65W Replacement
- 4" 45W Replacement
- ENERGY STAR Certified
- Damp Location
- CA COMPLIANT: T20, T24
- 3 Year Warranty

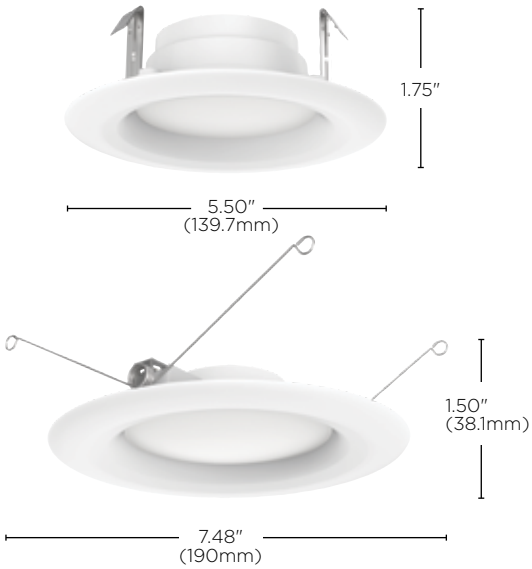

E26 Adapter included.
These retrofits are for use with recessed housings with an E26 socket only.

ILLUMINATION 8.7W
CCT 3000K
Beam Angle: 102°



Suitable Can Dimension

TYPE:	4 Inch
Min. Height	5.6"
Diameter	3.93" Min.

ILLUMINATION 9.2W
CCT 3000K
Beam Angle: 102°



Suitable Can Dimension

TYPE:	5/6 Inch
Min. Height	7.5"
Diameter	5.2" Min.

Item	Description	W	V	CRI	CCT	Lm	Beam	Trim Finish	Trim Size (in.)	Life (hrs.)	UPC	Pack
S11640	8.7WLED/RDL/4/930/120V/6PK	8.7	120	90	3000K	600	102	White	5.50	35K	045923116407	4-6pks
S11641	9.2WLED/RDL/5-6/930/120V/6PK	9.2	120	90	3000K	650	102	White	7.48	35K	045923116414	3-6pks

Product sheet SA2732

5″/6″ LED RECESSED DOWNLIGHT RETROFITS

Features:

- Direct replacement for reflector lamps
- High efficiency/environmentally friendly
- Dimmable†
- Wet location
- c-UL-us Classified
- Long life—35,000 hours
- ENERGY STAR® certified
- 3 Year warranty

E26 Adapter included
This retrofit is for use with recessed housings with an E26 socket only.

Illumination



Beam Angle: 90°

Item	Description	W	V	CRI	CCT	Lm	Beam	Trim Finish	Trim Size (in.)	Life (hrs.)	UPC	Pack
S29312	9.8WLED/RDL/5-6/27K/120V	9.8	120	90	2700K	650	90°	WH	7.38	35K	045923293122	12
S29313	9.8WLED/RDL/5-6/30K/120V	9.8	120	90	3000K	650	90°	WH	7.38	35K	045923293139	12
S29314	9.8WLED/RDL/5-6/40K/120V	9.8	120	90	4000K	650	90°	WH	7.38	35K	045923293146	12
S29315	9.8WLED/RDL/5-6/50K/120V	9.8	120	90	5000K	650	90°	WH	7.38	35K	045923293153	12

†Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

Product sheet SA2013

12V LED RECESSED DOWNLIGHT RETROFITS

Features:

- Dimmable†
- Wet location listed
- Works with magnetic and electronic 12V transformers
- Long life—35,000 hours
- 3 Year warranty

Bi-Pin Adapter included

Item	Description	W	V	CRI	CCT	Lm	Beam	Trim Finish	Trim Size (in.)	Life (hrs.)	UPC	Pack
S9729	7.5WLED/RDL/4"BFL/12V 90CRI 3K	7.5	12	90	3000K	460	90°	WH	4.94	35K	045923097294	12

Product sheet SA1174

QUICK TRIM™ 4", 5"/6" LED RECESSED DOWNLIGHT RETROFIT 2-PACKS

Features:

- Direct replacement for reflector lamps
- Dimmable†
- Damp location listed
- Long life—25,000 hours
- ENERGY STAR® certified
- 3 Year warranty

Extends to reach the socket.
Retracts to meet the surface.

Step 1

Screw lamp into existing socket.

Step 2

Push into the fixture until the trim is flush against surface.

Illumination	4"	5"-6"
1m	340 lx in Center	420 lx in Center
2m	85 lx in Center	100 lx in Center

Beam Angle: 110°

Item	Description	W	V	CRI	CCT	Lm	Beam	Trim Finish	Trim Size (in.)	Life (hrs.)	UPC	Pack
S9598	8.5W/LED/4"TRIM/2700K/120V/2PK	8.5	120	80+	2700K	510	110°	White	5.75	25K	045923095986	12-2pks
S9599	12W/LED/5-6"TRIM/2700K/120V/2P	12	120	80+	2700K	800	110°	White	8.25	25K	045923095993	12-2pks

†Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

Product sheet SA1965

HI-PRO LED FILAMENT LAMPS

Features:

- Replacement for up to 175W HID
- Energy saving LED, traditional HID look
- Universal burning position
- Ballast bypass 120V-277V
- 3000K, 5000K options
- 360° Beam angle
- E26/EX39 Base versions
- Wet location
- 3 Year warranty

Common Applications:

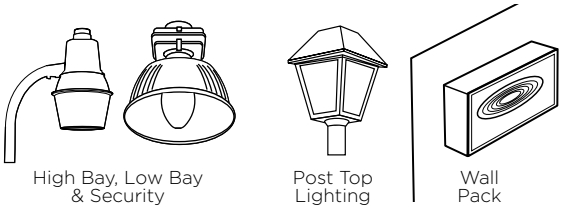

What's inside: High power LED filament strips

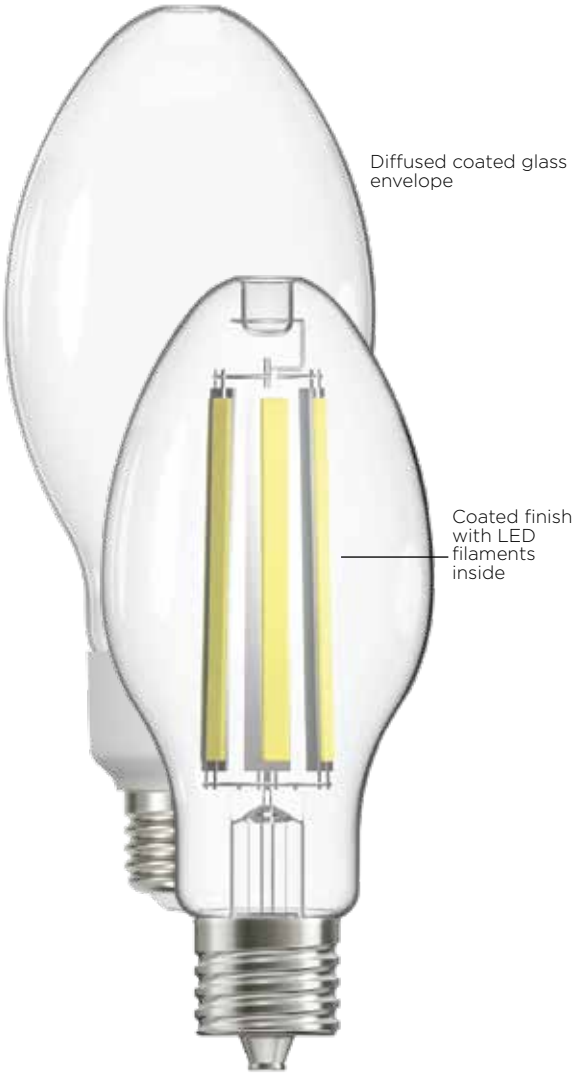

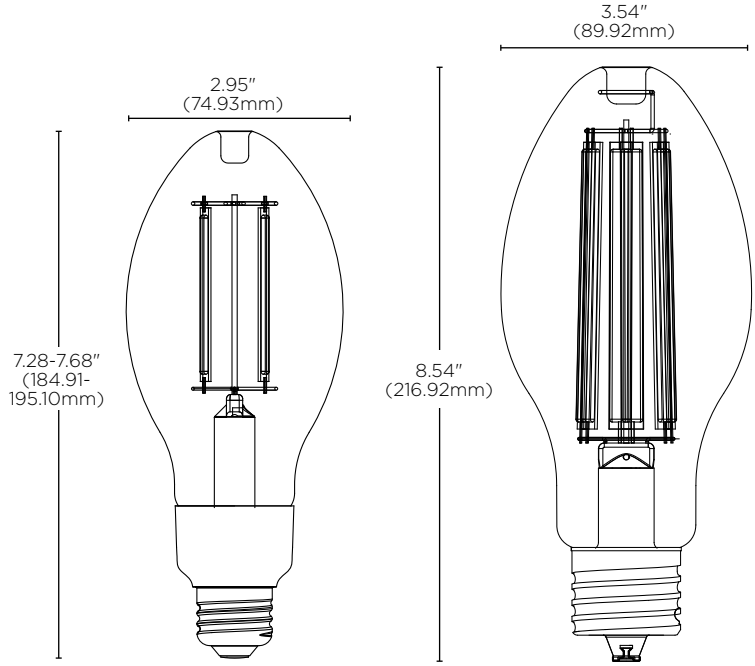

ED23 / E26

ED28 / EX39



Beam Angle: 360°

BALLAST BYPASS | WET LOCATION | ENCLOSED FIXTURE | 360° BEAM | 80 CRI | CLASSIFIED c UL us

Item	Description	HID Equivalent	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S13130	16W/LED/HID/ED23/850/E26	70	16	120-277	ED23	E26	5000K	2000	80	7.28	2.95	25K	045923131301	12/1
S13131	22W/LED/HID/ED23/850/E26	100	22	120-277	ED23	E26	5000K	3000	80	7.28	2.95	25K	045923131318	12/1
S13132	30W/LED/HID/ED23/830/E26	125	30	120-277	ED23	E26	3000K	4000	80	7.68	2.95	25K	045923131325	12/1
S13133	30W/LED/HID/ED23/850/E26	125	30	120-277	ED23	E26	5000K	4000	80	7.68	2.95	25K	045923131332	12/1
EX39														
S13134	36W/LED/HID/ED28/850/EX39	150	36	120-277	ED28	EX39	5000K	5000	80	8.54	3.54	25K	045923131349	12/1
S13135	42W/LED/HID/ED28/830/EX39	175	42	120-277	ED28	EX39	3000K	6000	80	8.54	3.54	25K	045923131356	12/1
S13136	42W/LED/HID/ED28/850/EX39	175	42	120-277	ED28	EX39	5000K	6000	80	8.54	3.54	25K	045923131363	12/1

Product sheet SA2738

CCT SELECTABLE HI-PRO LAMPS

Features:

- Built in sensor port for additional control options
- Dedicated wattage to ensure proper size lamp for the fixture
- CCT selectable
- Advanced thermal management
- 4 KV built-in surge protection
- Enclosed rated
- Damp Location
- DLC certified
- Long-life - 50,000 Hours

ColorQuick®

Selectable Color Technology

Switch to/from the following CCT

3000K 4000K 5000K

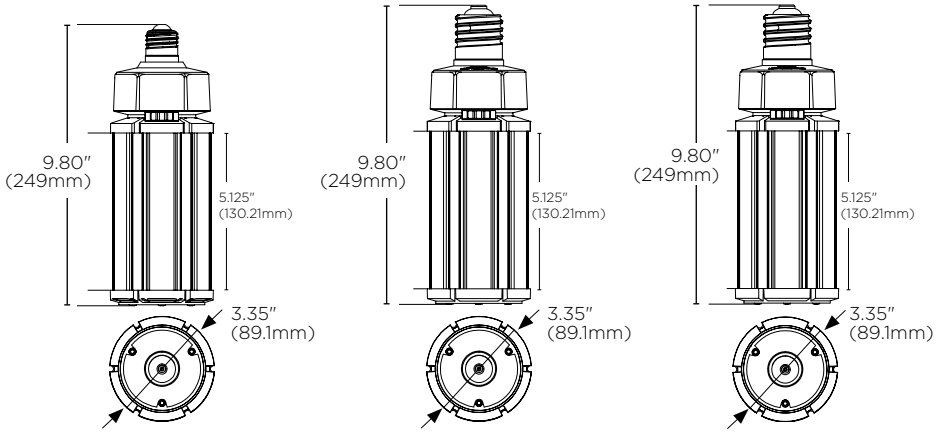

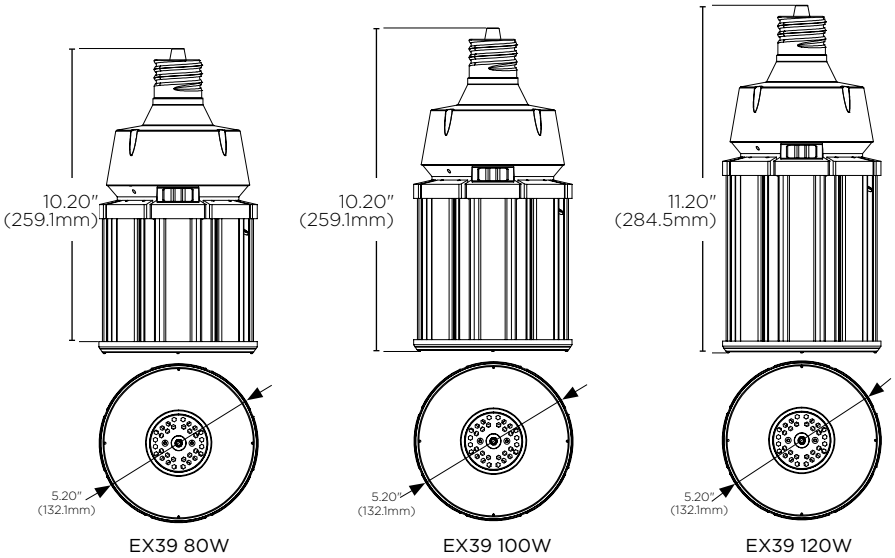



Beam Angle: 360°

WI-FI DIMMABLE | CCT SELECTABLE | 100-277V | 360° BEAM | DAMP LOCATION | ^ ENCLOSED FIXTURE | 4KV SURGE PROTECTION | CLASSIFIED UL US | DLC

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pk
S13140	45W/LED/HID/CCT/E26/100-277V	200	45	100-277	Corncob	E26	3000K/4000K/5000K	5850-6300	80	9.80	3.35	50K	045923131400	12/1
S13141◆	45W/LED/HID/CCT/EX39/100-277V	200	45	100-277	Corncob	EX39	3000K/4000K/5000K	5850-6300	80	9.80	3.35	50K	045923131417	12/1
S13142◆	54W/LED/HID/CCT/EX39/100-277V	250	54	100-277	Corncob	EX39	3000K/4000K/5000K	7270-7560	80	9.80	3.35	50K	045923131424	12/1
S13143◆	80W/LED/HID/CCT/EX39/100-277V	250	80	100-277	Corncob	EX39	3000K/4000K/5000K	10400-11200	80	10.20	5.20	50K	045923131431	4/1
S13144◆	100W/LED/HID/CCT/EX39/100-277V	400	100	100-277	Corncob	EX39	3000K/4000K/5000K	13000-14000	80	10.20	5.20	50K	045923131448	4/1
S13145◆	120W/LED/HID/CCT/EX39/100-277V	500	120	100-277	Corncob	EX39	3000K/4000K/5000K	15600-16800	80	11.20	5.20	50K	045923131455	4/1

Accessories

80-929	Hard Wire Surge Protector – 10kV	045923809293
80-954	Hi-Pro Wi-Fi Module – (Satco STARFISH in the App store)	045923809549
80-956	Hi-Pro Photocell - On/Off with adjustable settings for daylight and timers	045923809563
80-957	Hi-Pro Microwave motion sensor - On/Off with standby dimming option	045923809570

^ For minimum compartment size of enclosed fixture visit www.satco.com

Product sheet SA2742

HI-PRO LED LAMPS

- Advanced passive heat dissipation
- High efficiency
- Built-in surge protection on all items
  - 18W – 22W 2.5KV
  - 36W – 54W 4KV
  - 80W – 120W 6KV

Standard Features:

- Replaces HID, CFL, and Incandescent
- Direct wire range voltage 100-277V
- Approved for totally enclosed fixtures^
- IP64-Damp location
- 3 CCT options
- High bay/low bay/post top
- 80W-120W - Base up or down only
- DLC listed◆
- Long life — 50,000 hours
- 5 Year limited warranty

18W 36W 54W 120W



Beam Angle: 300°

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9678	18W/LED/HID/AMBER/100-277V E26	70	18	100-277	Corncob	E26	N/A	1100	N/A	6.88	2.75	50K	045923096785	24/12
S39670	18W/LED/HID/2700K/100-277V E26	70	18	100-277	Corncob	E26	2700K	2340	80	5.69	2.38	50K	045923306709	24/12
S39390	18W/LED/HID/5000K/100-277V E26	70	18	100-277	Corncob	E26	5000K	2610	80	5.69	2.38	50K	045923303906	24/12
S39671	22W/LED/HID/2700K/100-277V E26	100	22	100-277	Corncob	E26	2700K	2860	80	5.94	2.38	50K	045923306716	24/12
S39391	22W/LED/HID/5000K/100-277V E26	100	22	100-277	Corncob	E26	5000K	3080	80	5.69	2.38	50K	045923303913	24/12
S39672	36W/LED/HID/2700K/100-277V E26	150	36	100-277	Corncob	E26	2700K	4680	80	7.34	3.34	50K	045923306723	12/1
S39392	36W/LED/HID/5000K/100-277V E26	150	36	100-277	Corncob	E26	5000K	5148	80	7.34	3.34	50K	045923303920	12/1
S9489	36W/LED/HID/AMBER/100-277V E26	150	36	100-277	Corncob	E26	1461K	4140	N/A	9.25	3.69	50K	045923094897	12/1
S39738	45W/LED/HID/4000K/100-277V E26	175	45	100-277	Corncob	E26	4000K	6300	80	8.50	3.34	50K	045923397387	12/1
S39739	45W/LED/HID/5000K/100-277V E26	175	45	100-277	Corncob	E26	5000K	6435	80	8.50	3.34	50K	045923397394	12/1
S39673◆	45W/LED/HID/4K/100-277V EX39	175	45	100-277	Corncob	EX39	4000K	6300	80	8.81	3.34	50K	045923306730	12/1
S39393◆	45W/LED/HID/5K/100-277V/EX39	175	45	100-277	Corncob	EX39	5000K	6435	80	8.81	3.34	50K	045923303937	12/1
S39674◆	54W/LED/HID/4K/100-277V/EX39	250	54	100-277	Corncob	EX39	4000K	7560	80	9.03	3.34	50K	045923306747	12/1
S39394◆	54W/LED/HID/5K/100-277V/EX39	250	54	100-277	Corncob	EX39	5000K	7722	80	9.03	3.34	50K	045923303944	12/1
S39675◆	80W/LED/HID/4K/100-277V/EX39	320	80	100-277	Corncob	EX39	4000K	11200	80	8.78	4.72	50K	045923306754	4/1
S39395◆	80W/LED/HID/5K/100-277V/EX39	320	80	100-277	Corncob	EX39	5000K	11440	80	8.78	4.72	50K	045923303951	4/1
S39676◆	100W/LED/HID/4K/100-277V/EX39	400	100	100-277	Corncob	EX39	4000K	14000	80	9.88	4.72	50K	045923306761	4/1
S39396◆	100W/LED/HID/5K/100-277V/EX39	400	100	100-277	Corncob	EX39	5000K	14300	80	9.88	4.72	50K	045923303968	4/1
S39677◆	120W/LED/HID/4K/100-277V/EX39	600	120	100-277	Corncob	EX39	4000K	16800	80	10.34	4.72	50K	045923306778	4/1
S39397◆	120W/LED/HID/5K/100-277V/EX39	600	120	100-277	Corncob	EX39	5000K	17160	80	10.34	4.72	50K	045923303975	4/1
Accessories														
92-410	Mog to Med Socket Reducer for S39390, S39391, S39392, S39670, S39671 and S39672												045923924064	
80-929	Hard Wire Surge Protector												045923809293	

^ See warranty for details at www.satco.com. Lamp life may vary depending on application and use.

Product sheet SA2553

HI-PRO 277-347V
HIGH LUMEN LED LAMPS

Features:

- Replaces HID, CFL, and Incandescent
- Direct wire range voltage 277-347V
- Built-in surge protection 80-120W
- Approved for totally enclosed fixtures ˆ
- IP65 rated
- 5000K
- Beam angle 300°
- CRI 80+
- High bay/low bay/post top
- 80W-120W - Base up or down only
- DLC listed◆
- 5 Year limited warranty

8W, 22W, 36W
E26

45W, 54W
EX39

80W, 100W
EX39

120W
EX39



Beam Angle: 300°

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S28710	18W/LED/HID/5000K/277-347V E26	70	18	277-347	Corncob	E26	5000K	2400	80+	6.77	2.76	50K	045923287107	24/12
S28711	22W/LED/HID/5000K/277-347V/E26	100	22	277-347	Corncob	E26	5000K	2950	80+	7.56	2.76	50K	045923287114	24/12
S28712	36W/LED/HID/5000K/277-347V/E26	150	36	277-347	Corncob	E26	5000K	4800	80+	9.17	3.66	50K	045923287121	12/1
S28713◆	45W/LED/HID/5K/277-347V/EX39	175	45	277-347	Corncob	EX39	5000K	6000	80+	10.35	3.66	50K	045923287138	12/1
S28714◆	54W/LED/HID/5K/277-347V/EX39	250	54	277-347	Corncob	EX39	5000K	7200	80+	10.35	3.66	50K	045923287145	12/1
S28715◆	80W/LED/HID/5K/277-347V/EX39	320	80	277-347	Corncob	EX39	5000K	10640	80+	9.25	5.87	50K	045923287152	4/1
S28716◆	100W/LED/HID/5K/277-347V/EX39	400	100	277-347	Corncob	EX39	5000K	13300	80+	9.61	5.88	50K	045923287169	4/1
S28717◆	120W/LED/HID/5K/277-347V/EX39	600	120	277-347	Corncob	EX39	5000K	16000	80+	10.39	5.78	50K	045923287176	4/1
Accessories														
92-410	Mog to Med Socket Reducer												045923924064	
80-935	Hard Wire Surge Protector												045923809354	

Product sheet SA2308

ˆ See warranty for details at www.satco.com. Lamp life may vary depending on application and use.

Stocked in Canada only.

HI-PRO LED 12-24V LOW VOLTAGE LAMPS

Features:

- Replaces HID, CFL, and Incandescent
- Approved for totally enclosed fixtures ^
- IP645 rated
- 5000K
- Long life—50,000 hours
- 5 Year limited warranty

10W 14W 18W



Beam Angle: 330°

DAMP LOCATION ^ ENCLOSED FIXTURE

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9753	10W/LED/HID/5000K/12V-24V E26	30	10	12-24	Corncob	E26	5000K	1200	80+	5.81	2.44	50K	045923097539	48/1
S9754	14W/LED/HID/5000K/12V-24V E26	50	14	12-24	Corncob	E26	5000K	1680	80+	6.19	2.88	50K	045923097546	48/1
S9755	18W/LED/HID/5000K/12V-24V E26	70	18	12-24	Corncob	E26	5000K	2160	80+	7.00	2.88	50K	045923097553	48/12

^ See warranty for details at www.satco.com. Lamp life may vary depending on application and use.

Product sheet SA2609

HI-PRO LED POST TOP LAMPS

Features:

- For use in any post top fixture to provide light out and down only
- Direct wire (ballast by-pass) 100-277V / E26
- Approved for enclosed fixtures ^
- Long life—50,000 hours
- 5 Year limited warranty

Controls light pollution

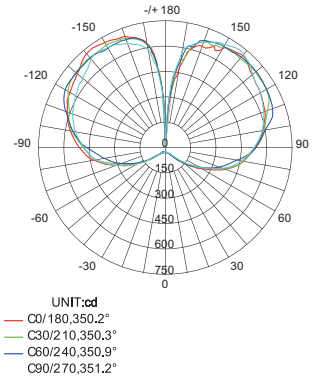

^ ENCLOSED FIXTURE c UL US LISTED

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S9779	40W/LED/HID/PT/3000K/100-277V	175	40	100-277	Corncob	E26	3000K	5000	80+	5.50	5.13	50K	045923097799	12/1
Accessories														
92-410	Mog to Med Socket Reducer												045923924064	
80-929	Hard Wire Surge Protector												045923809293	

^ See warranty for details at www.satco.com

Product sheet SA2107

HI-PRO LED MULTI-BEAM LAMPS

Features:

- Replaces HID, CFL, and incandescent
- Direct wire range voltage 100-277V
- Approved for totally enclosed fixtures^
- High bay, low bay, hanging sockets, and post top
- 2700K or 5000K
- Multi-directional
- Light panels lock into place creating
- 3 separate beam angle options
- Long life—50,000 hours
- 5 Year limited warranty

120° Beam

150° Beam

260° Beam

DAMP LOCATION ^ ENCLOSED FIXTURE c UL LISTED US c CLASSIFIED UL US ◆ DLC

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S39768	30W/LED/HID/MB-G3/27K/100-277V	150	30	100-277	Corncob	E26	2700K	3840	80	6.69	3.35	50K	045923397684	24/6
S39750	30W/LED/HID/MB-G3/50K/100-277V	150	30	100-277	Corncob	E26	5000K	4200	80	6.69	3.35	50K	045923397509	24/6
S39798◆	40W/LED/HID/MB-G3/27K/100-277V	175	40	100-277	Corncob	EX39	2700K	5120	80	7.24	3.35	50K	045923397981	12/6
S39751◆	40W/LED/HID/MB-G3/50K/100-277V	175	40	100-277	Corncob	EX39	5000K	5600	80	7.24	3.35	50K	045923397516	12/6
S39799◆	60W/LED/HID/MB-G3/27K/100-277V	250	60	100-277	Corncob	EX39	2700K	7680	80	7.76	4.13	50K	045923397998	12/6
S39752◆	60W/LED/HID/MB-G3/50K/100-277V	250	60	100-277	Corncob	EX39	5000K	8400	80	7.76	4.13	50K	045923397523	12/6
S39769◆	75W/LED/HID/MB-G3/50K/100-277V	400	75	100-277	Corncob	EX39	5000K	10500	80	8.46	4.13	50K	045923397691	12/6
S39679◆	90W/LED/HID/MB-G3/50K/100-277V	600	90	100-277	Corncob	EX39	5000K	12600	80	9.84	4.84	50K	045923396793	6/1
Accessories														
86-215	Hi-Pro Motion Sensor/PIR (Passive Infrared)												045923862151	
80-929	Hard Wire Surge Protector - 10kV												045923809293	
92-410	Mog to Med Socket Reducer for S39750 and S39768												045923924101	

^ See warranty for details at www.satco.com

Product sheet SA2678

MOGUL BASE 1500 WATTS 600 VOLT c UL LISTED US

Item	Description	Max. W	Max V.	UPC	Pack
90-483	Keyless Mogul Lamp Holder	1500	600	045923904837	40

60W LED MULTI-BEAM UTILITY LIGHT WITH & WITHOUT MOTION SENSOR

Features:

- Replaces high-wattage HID CFL & Incandescent lamps, but uses only 60 Watts
- LED panels adjust to 135° and a full 180°
- Rugged construction
- Built-in motion sensor option
- E26 medium base
- Direct wire range voltage 100-277V
- Damp location
- c-UL-us Listed
- 3 Year warranty

Applications:

- Garage
- Barn
- Workshop
- Shed
- Utility room
- Large open spaces

270° Beam

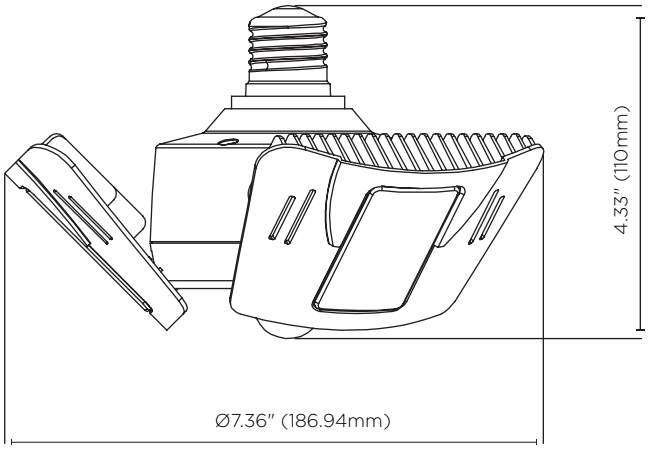

120° Beam

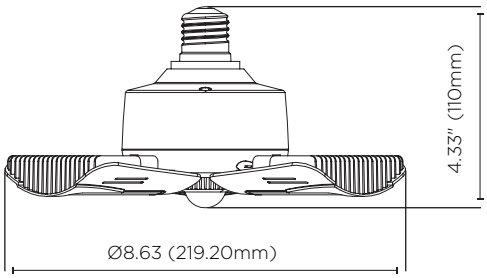



Beam Angle: 120°



Beam Angle: 270°

DAMP LOCATION | 50,000 HOURS | c UL us LISTED

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S13118	60W/LED/UTL/MB/4000K	175	60	100-277	Corncob	E26	4000K	5880	80	4.21	4.75	50K	045923131189	12/1
S13119	60W/LED/UTL/MB/4000K/MOTION	175	60	100-277	Corncob	E26	4000K	5880	80	4.33	4.75	50K	045923131196	12/1

Product sheet SA2320

HIGH VOLTAGE HI-PRO LED LAMPS 277V-480V

Features:

- High Lumen Omni-directional LED for Industrial/Commercial applications
- Direct wire range voltage 277–480V
- Approved for totally enclosed fixtures^
- 4KV Surge protection

3.35" (85.09mm)

9.5" (241.3mm)

54W

5.2" (132.08mm)

10.2" (259.08mm)

100W



Beam Angle: 360°

277-480V | DAMP LOCATION | ^ ENCLOSED FIXTURE | c UL LISTED US | c UL US | DLC

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S13123	54W/LED/HID/5K/277-480V/EX39	250	54	277-480	Corncob	EX39	5000K	8100	80	9.50	3.35	50000	045923131233	12/1
S13124	100W/LED/HID/5K/277-480V/EX39	400	100	277-480	Corncob	EX39	5000K	15000	80	10.20	5.20	50000	045923131240	4/1

^ See warranty for details at www.satco.com

Product sheet SA2698

HI-PRO 360

Features:

- Multi-angle rotating LED lamp with folding panel design
- Replaces HID, CFL, and incandescent
- Direct wire range voltage 100-277V
- Approved for totally enclosed fixtures ˆ
- 2700K 4000K or 5000K options
- Built-in 4K surge protection
- EX39 base
- IP64/Damp location
- Long life—50,000 hours
- 5 Year limited warranty

Application:

- Indoor/outdoor direct replacement
- Street lamps/shoe box
- High bays/low bays
- Parking garages
- Commercial and industrial security
- Gymnasiums and other high ceiling applications
- Outdoor canopies

Up, down, tilt, angle one side or both—almost unlimited lighting options



Beam Angle: 360°

WI-FI DIMMABLE † DIMMABLE DAMP LOCATION ˆ ENCLOSED FIXTURE 100-277V ◆ DLC

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S13120◆	70W/LED/HID/HP360/827/100-277V	250	70	100-277	Corncob	EX39	2700K	10500	80+	11.59	7.00	50K	045923131202	8/1
S13121◆	70W/LED/HID/HP360/840/100-277V	250	70	100-277	Corncob	EX39	4000K	10500	80+	11.59	7.00	50K	045923131219	8/1
S13122◆	70W/LED/HID/HP360/850/100-277V	250	70	100-277	Corncob	EX39	5000K	10500	80+	11.59	7.00	50K	045923131226	8/1
S13127◆	100W/LED/HID/HP360/850/100-277V	350	100	100-277	Corncob	EX39	5000K	15000	80	12.35	4.60	50K	045923131271	4/1
Accessories														
80-929	Hard Wire Surge Protector – 10kV												045923809293	
80-954	Hi-Pro Wi-Fi Module – (Satco STARFISH in the App store)												045923809549	
80-956	Hi-Pro Photocell - On/Off with adjustable settings for daylight and timers												045923809563	
80-957	Hi-Pro Microwave motion sensor - On/Off with standby dimming option												045923809570	

† Dimmable via WiFi accessory only. ˆ See warranty for details at www.satco.com

Product sheet SA2579

HI-PRO SHOEBOX LAMP WITH SENSOR PORT

Features:

- Greater efficiency
- 4kV surge protection
- Advanced heat dissipation
- Rotatable base
- New sensor port & accessories

Applications:

- Shoebox/Parking lot
- Canopy
- Landscape Flood





Beam Angle: 180°

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S28931	80W/LED/HID/SB/3K/EX39	250	80	100-277	Corncob	EX39	3000K	10400	83	8.77	4.38	50K	045923289316	4/1
S28932	80W/LED/HID/SB/5K/EX39	250	80	100-277	Corncob	EX39	5000K	10400	83	8.77	4.38	50K	045923289323	4/1
S28937	110W/LED/HID/SB/3K/EX39	400	110	100-277	Corncob	EX39	3000K	14300	83	11.13	4.38	50K	045923289378	4/1
S28938	110W/LED/HID/SB/5K/EX39	400	110	100-277	Corncob	EX39	5000K	14300	83	11.13	4.38	50K	045923289385	4/1
Accessories														
80-929	Hard Wire Surge Protector – 10kV												045923809293	
80-954	Hi-Pro Wi-Fi Module – (Satco STARFISH in the App store)												045923809549	
80-956	Hi-Pro Photocell - On/Off with adjustable settings for daylight and timers												045923809563	
80-957	Hi-Pro Microwave motion sensor - On/Off with standby dimming option												045923809570	

^ See warranty for details at www.satco.com

Product sheet SA2687

HI-PRO LED WALL PACK LAMPS

Features:

- 20/30/40/60 Watt options replaces up to 250 Watt HID
- Approved for totally enclosed fixtures^
- Direct wire range voltage 100-277V
- IP64, higher efficiency, improved heat dissipation
- 4kV Surge protection
- Reduced size
- 180˚ beam/adjustable base (E26/E39)
- Horizontal operation
- DLC listed◆
- Damp location
- Long life—50,000 hours
- 5 Year limited warranty

Applications:

- Wall pack, canopy, shoe box, or cobra head fixtures

320° Swivel when installed





Beam Angle: 180°

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S8928	20W/LED/HID/WP/5K/E26/100-277V	100	20	100-277	Corncob	E26	5000K	3000	80	5.31	3.13	50K	045923089282	24/1
S8980	30W/LED/HID/WP/5K/E26/100-277V	125	30	100-277	Corncob	E26	5000K	4500	80	7.20	3.60	50000	045923089800	12/6
S8929	40W/LED/HID/WP/5K/E26/100-277V	175	40	100-277	Corncob	E26	5000K	6000	80	7.81	3.13	50000	045923089299	12/6
S8930◆	40W/LED/HID/WP/5K/E39/100-277V	175	40	100-277	Corncob	E39	5000K	6000	80	8.50	3.13	50000	045923089305	12/6
S8987◆	60W/LED/HID/WP/5K/E39/100-277V	250	60	100-277	Corncob	E39	5000K	9000	80	10.63	3.13	50000	045923089879	12/6
Accessories														
92-410	Mog to Med Socket Reducer												045923924064	
80-929	Hard Wire Surge Protector												045923809293	

^ See warranty for details at www.satco.com

Product sheet SA2173

HI-PRO LED HIGH BAY/ LOW BAY LAMPS

Features:

- Replaces HID lamps
- Up to 25,000 Lumens
- Advanced passive heat dissipation
- Wide, 180° beam angle
- Long neck design fits more fixtures
- Dimmable*
- Damp location
- 6kV built in surge protection
- DLC 5.1

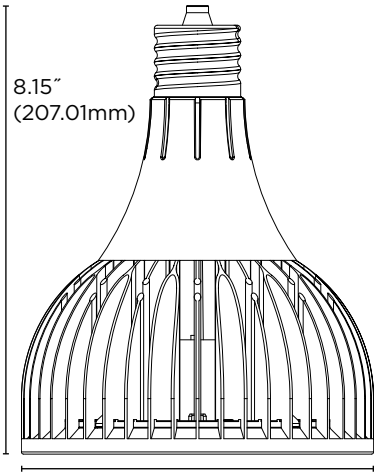

S13150, S13151, S13152, S13153

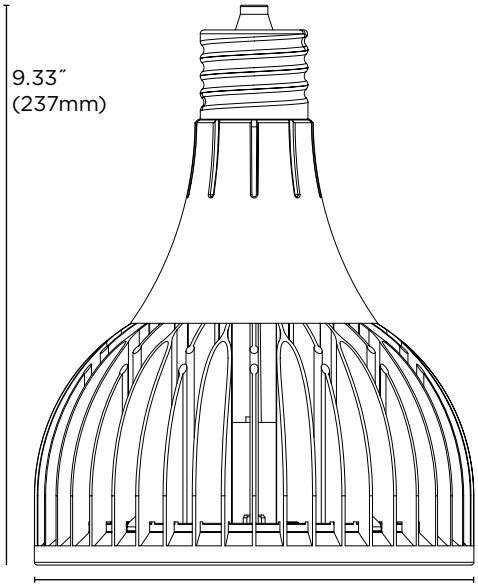

S13154, S13155



Beam Angle: 180°

Item	Description	W	V	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
S13150	72W/LED/HID-HB/840/120-277V/DIM	72	120-277	EX39	WHITE	4000K	11,000	80	180°	8.15	50K	045923131509	4
S13151	72W/LED/HID-HB/850/120-277V/DIM	72	120-277	EX39	WHITE	5000K	11,000	80	180°	8.15	50K	045923131516	4
S13152	100W/LED/HID-HB/840/120-277V/DIM	100	120-277	EX39	WHITE	4000K	15,500	80	180°	8.15	50K	045923131523	4
S13153	100W/LED/HID-HB/850/120-277V/DIM	100	120-277	EX39	WHITE	5000K	15,500	80	180°	8.15	50K	045923131530	4
S13154	152W/LED/HID-HB/840/120-277V/DIM	152	120-277	EX39	WHITE	4000K	25,000	80	180°	9.33	50K	045923131547	4
S13155	152W/LED/HID-HB/850/120-277V/DIM	152	120-277	EX39	WHITE	5000K	25,000	80	180°	9.33	50K	045923131554	4

† See satco.com for dimmer compatibility. ^ See warranty for details at www.satco.com

Product sheet SA2827

HI-PRO LED HIGH BAY/ LOW BAY LAMPS

Features:

- Replaces HID, CFL, and Incandescent
- 115° beam angle
- Long neck option fits more fixtures
- Direct wire range voltage 120-277V
- 6 kV Surge protection
- Light weight
- Advanced passive heat dissipation
- Long life—50,000 hours
- 5 Year limited warranty



Beam Angle: 115°

DAMP LOCATION ^ ENCLOSED FIXTURE 120-277V 115° BEAM ◆ DLC

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S13112◆	80W/LED/HID-HB/4K/120-277V	250	80	120-277	Flood	EX39	4000K	10000	80	10.12	7.48	50K	045923131127	4/1
S13113◆	80W/LED/HID-HB/5K/120-277V	250	80	120-277	Flood	EX39	5000K	10000	80	10.12	7.48	50K	045923131134	4/1
S13114◆	130W/LED/HID-HB/4K/120-277V	400	130	120-277	Flood	EX39	4000K	16300	80	12.40	9.65	50K	045923131141	4/1
S13115◆	130W/LED/HID-HB/5K/120-277V	400	130	120-277	Flood	EX39	5000K	16300	80	12.40	9.65	50K	045923131158	4/1
Accessories														
80-929	Hard Wire Surge Protector												045923809293	

Product sheet SA2530

HI-PRO SENSORS ADJUSTABLE CONTROLS FOR LED HID REPLACEMENT LAMPS

80-954 Hi-Pro WiFi Module

Features:

- Access functions through Satco/Starfish App
- Dimming and time control
- Support single or group lamp control
- Available voice control:
- Amazon Echo, Google Home, etc.
- WiFi: 2.4GHz
- OS: Android 4.2 or newer, IOS 8.0 or newer

Specifications:

- Operating voltage: 15V DC + 2V
- Current: 20mA
- IP rating: IP20
- WIFI: 2.4GHz
- OS: Android 4.2 or newer, IOS 8.0 or newer
- Operating Temperature: -20°C (+4°F) to +60°C (+140°F)
- Warranty: 5 years

80-956 Hi-Pro Photocell

Features:

- Natural light detection
- Reaction lux options: 20 lx, 50 lx, 100 lx, 300 lx
- Adjustable hold time
- Standard 3.5mm Aux port connection

Specifications:

- Operating voltage: 15V DC + 2V
- Output voltage: 0-10V
- Current: 20mA
- IP rating: IP20
- Operating Temperature: -20°C (4°F) to +60°C (+140°F)
- Warranty: 5 years

80-955 Hi-Pro Motion Sensor / Infra-Red

Features:

- Motion detection area: 6m (19.7′)
- Standby bi-level dimming: Off, 20% dim, 40% dim or 60% dim
- Hold time: up to 10 minutes
- Standard 3.5mm Aux port connection
- Not for use in enclosed fixtures

Specifications:

- Operating voltage: 15V DC + 2V
- Output voltage: 0-10V
- Current: 20mA
- IP rating: IP20
- Operating Temperature: -20°C (+4°F) to +35°C (+95°F)
- Warranty: 5 years

80-957 Hi-Pro Motion Sensor / Microwave

Features:

- Motion detection area: 10m (33′)
- Standby bi-level dimming: Off, 20% dim, 40% dim or 60% dim
- Hold time: up to 10 minutes
- Suitable for use in enclosed fixtures (non-metallic)

Specifications:

- Operating voltage: 15V DC + 2V
- Output voltage: 0-10V
- Current: 20mA
- IP rating: IP20
- Operating Temperature: -20°C (+4°F) to +60°C (+140°F)
- Warranty: 5 years

Item	Description	UPC
80-954	Hi-Pro Wi-Fi Module – (Satco STARFISH in the App store)	045923809549
80-955	Hi-Pro Motion Sensor - Infra-Red - Standby bi-level dimming	045923809552
80-956	Hi-Pro Photocell - On/Off with adjustable settings for daylight and timers	045923809563
80-957	Hi-Pro Microwave motion sensor - On/Off with standby dimming option	045923809570

For Use with: Hi-Pro 360 (pagE 100), Shoebox Series (page 107) CCT Series (page 101)

Product sheet SA2634

HI-PRO LED TEMPORARY WORK LIGHTS

Features:

- Durable, lightweight with high impact cage
- Energy-efficient, high lumen LED lighting
- Omni-directional 300° beam angle
- Grounded 3-prong plug
- T-handle for mounting

#16/3 Ga. SJTW-3 Orange Outdoor Extension Cords

Satco carries a full line of #16/3 Ga. outdoor extension cords, rugged enough for any job site. See catalog SA1700 or go to www.satco.com for details.

Item	Length
93-5034	8 ft.
93-5035	15 ft.
93-5005	25 ft.

Item	Length
93-5006	50 ft.
93-5007	100 ft.



Center hole and T-Bar handle with trigger allows for secure installations from a carabiner hook and even light distribution

Warning light to show 277V input, preventing misuse of the connecting outlet

Improved durability of the protective cage



Enhanced passive heat sink design

Linkable for longer runs from one power supply 6 foot cord included..

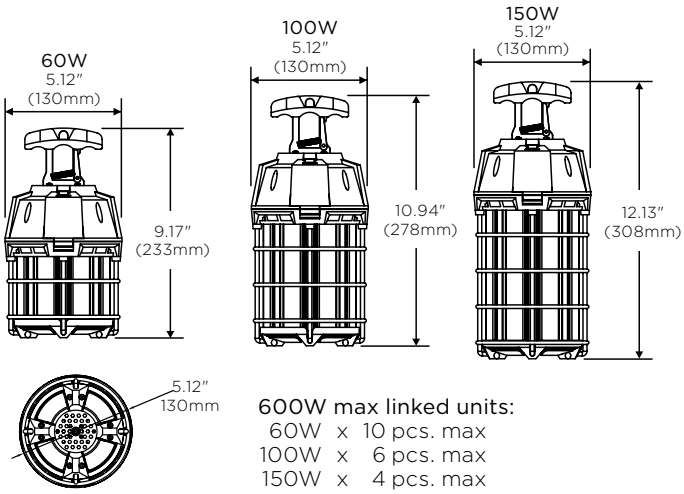

600W max linked units:
60W x 10 pcs. max
100W x 6 pcs. max
150W x 4 pcs. max



Beam Angle: 300°

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S38939	60W/LED/HID/TEMP/5K/120V	200	60	120	Corncob	Plug	5000K	6000	80	9.20	5.12	50K	045923389399	4
S38946	100W/LED/HID/TEMP/5K/120V	400	100	120	Corncob	Plug	5000K	10000	80	10.90	5.12	50K	045923389467	4
S38975	150W/LED/HID/TEMP/5K/120V	600	150	120	Corncob	Plug	5000K	15000	80	12.10	5.12	50K	045923389757	4

Product sheet SA2703

HI-PRO TEMPORARY CONSTRUCTION STRING LIGHT SET - 50FT.

Features:

- For use in any commercial work area
- 5 Lights per string
- 50 Watt/6000 Lumens per string
- 10 ft. between lights
- Linkable up to 6 sets
- Replaces HID, CFL and Incandescent
- 300° Omni-directional light
- Portable/plug-in, 120V
- IP65—Water and dust proof
- 18 AWG cable

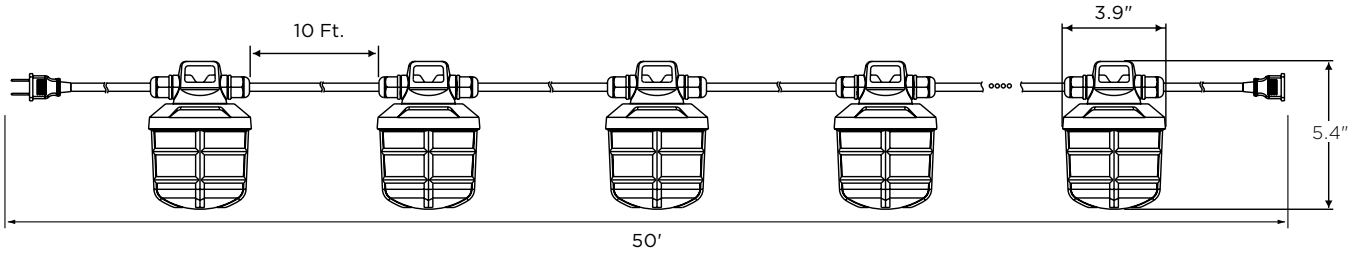

5 x 10W Lamps



Total 50W

Replace

5 x 75W Lamps



Total 375W



Beam Angle: 300°

Item	Description	HID Equiv.	W	V	Bulb Shape	Base	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
S28976	50-FT/LED/5PC/TEMP/STRING/120V	200	50	120	Corncob	Plug	5000K	6000	80	5.300	3.70	50K	045923289767	2/1

Product sheet SA2716

LED/CFL BALLAST BYPASS TYPE B REPLACEMENT LAMPS
2-PIN G23, GX23 BASE

Features

- 4.5W G23 replaces 5W, 7W & 9W CFL
- 6W GX23 replaces 13W CFL
- 2-Sided illumination
- Instant on to full brightness / no flickering
- Vertical or horizontal applications
- Up to 50% energy saving
- c-UL-us Classified
- Long life—50,000 hours
- 5 Year warranty

2 - Sided illumination

4.5 Watts 6 Watts



Wiring diagram



Beam Angle: 360°

G23 Base

GX23 Base

TYPE B | BALLAST BYPASS | 50,000 HOURS | 120-277V | 5 Year Warranty | CLASSIFIED C UL US

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
5, 7, 9 Watt Replacement														
S18400	4.5W/LED/CFL/827/G23/BP	4.5	120-277	PL	G23	FR	2700K	450	80	360°	6.54	50K	045923184000	50/10
S18401	4.5W/LED/CFL/830/G23/BP	4.5	120-277	PL	G23	FR	3000K	450	80	360°	6.54	50K	045923184017	50/10
S18402	4.5W/LED/CFL/835/G23/BP	4.5	120-277	PL	G23	FR	3500K	450	80	360°	6.54	50K	045923184024	50/10
S18403	4.5W/LED/CFL/840/G23/BP	4.5	120-277	PL	G23	FR	4000K	450	80	360°	6.54	50K	045923184031	50/10
S18404	4.5W/LED/CFL/850/G23/BP	4.5	120-277	PL	G23	FR	5000K	450	80	360°	6.54	50K	045923184048	50/10
13 Watt Replacement														
S28725	6W/LED/CFL/827/GX23/BP/G2	6	120-277	PL	GX23	FR	2700K	600	80	360°	7.09	50K	045923287251	50/10
S28726	6W/LED/CFL/830/GX23/BP/G2	6	120-277	PL	GX23	FR	3000K	600	80	360°	7.09	50K	045923287268	50/10
S28727	6W/LED/CFL/835/GX23/BP/G2	6	120-277	PL	GX23	FR	3500K	600	80	360°	7.09	50K	045923287275	50/10
S28728	6W/LED/CFL/840/GX23/BP/G2	6	120-277	PL	GX23	FR	4000K	600	80	360°	7.09	50K	045923287282	50/10
S28729	6W/LED/CFL/850/GX23/BP/G2	6	120-277	PL	GX23	FR	5000K	600	80	360°	7.09	50K	045923287299	50/10

Product sheet SA2685

LED/CFL DUAL MODE LAMPS (BALLAST BYPASS TYPE B/ BALLAST COMPATIBLE TYPE A)

Features:

- Direct replacements for CFL GX23 base lamps in existing fixtures with or without ballasts.*
- Over 50% energy savings vs. standard
- Ballast compatible and ballast bypass in one lamp
- Instant-on full brightness / no flickering
- 120-277V in bypass mode
- Damp location
- Long life—50,000 hours
- c-UL-us Listed - Type A
- c-UL-us Classified - Type B
- 5 Year warranty





Wiring diagram - bypass mode



Beam Angle: 120°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
S11550	5.5W/LED/CFL/827/2P/DUAL	5.5	120-277	PL	GX23	FR	2700K	500	80	120°	5.98	50K	045923115509	50/10
S11551	5.5W/LED/CFL/830/2P/DUAL	5.5	120-277	PL	GX23	FR	3000K	500	80	120°	5.98	50K	045923115516	50/10
S11552	5.5W/LED/CFL/835/2P/DUAL	5.5	120-277	PL	GX23	FR	3500K	500	80	120°	5.98	50K	045923115523	50/10
S11553	5.5W/LED/CFL/840/2P/DUAL	5.5	120-277	PL	GX23	FR	4000K	550	80	120°	5.98	50K	045923115530	50/10
S11554	5.5W/LED/CFL/850/2P/DUAL	5.5	120-277	PL	GX23	FR	5000K	550	80	120°	5.98	50K	045923115547	50/10

* Visit www.satco.com for an approved ballast list.

Product sheet SA2668

LED/CFL TYPE A DIRECT REPLACEMENT LAMPS

4-PIN (ELECTRONIC BALLASTS)
2-PIN (MAGNETIC BALLASTS)

Features:

- 4-pin 26, 32, 42 Watt direct replacement
- 2-pin 26 Watt direct replacement
- 4-pin lamps fit G24q-3 & GX24q-3 and GX24q-4 sockets
- 2-pin lamps fit G24d-3 sockets
- No re-wiring needed
- Instant on to full brightness / no flickering
- Vertical and horizontal options
- Up to 70% energy saving
- DLC listed◆ (4-pin only)
- c-UL-us listed
- Long life—50,000 hours
- 5 Year warranty

G24Q G24D

For vertical applications.

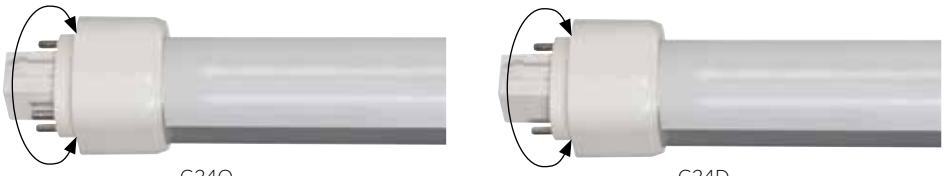

G24Q Rotates 270° when installed G24D

For horizontal applications.



Beam Angle: 120°

Item	Description	W	Base	Finish	CCT	Lm	CRI	Beam	MOL (in)	Life (hrs.)	UPC	Pack
4-Pin Horizontal												
S29850◆	9WPLH/LED/830/DR/4P	9	G24q	FR	3000K	1050	82	120°	6.63	50K	045923298509	50/10
S29851◆	9WPLH/LED/835/DR/4P	9	G24q	FR	3500K	1050	82	120°	6.63	50K	045923298516	50/10
S29852◆	9WPLH/LED/840/DR/4P	9	G24q	FR	4000K	1100	82	120°	6.63	50K	045923298523	50/10
S29853◆	9WPLH/LED/850/DR/4P	9	G24q	FR	5000K	1100	82	120°	6.63	50K	045923298530	50/10
2-Pin Horizontal												
S9854	9WPLH/LED/830/DR/2P	9	G24d	FR	3000K	850	82	120°	6.63	50K	045923098543	50/10
S9855	9WPLH/LED/835/DR/2P	9	G24d	FR	3500K	850	82	120°	6.63	50K	045923098550	50/10
S9856	9WPLH/LED/840/DR/2P	9	G24d	FR	4000K	900	82	120°	6.63	50K	045923098567	50/10
S9857	9WPLH/LED/850/DR/2P	9	G24d	FR	5000K	900	82	120°	6.63	50K	045923098574	50/10
4-Pin Vertical												
S29858◆	9WPLV/LED/830/DR/4P	9	G24q	FR	3000K	1050	82	120°	4.69	50K	045923298585	50/10
S29859◆	9WPLV/LED/835/DR/4P	9	G24q	FR	3500K	1050	82	120°	4.69	50K	045923298592	50/10
S29860◆	9WPLV/LED/840/DR/4P	9	G24q	FR	4000K	1100	82	120°	4.69	50K	045923298608	50/10
S29861◆	9WPLV/LED/850/DR/4P	9	G24q	FR	5000K	1100	82	120°	4.69	50K	045923298615	50/10
2-Pin Vertical												
S9862	9WPLV/LED/830/DR/2P	9	G24d	FR	3000K	850	82	120°	4.69	50K	045923098628	50/10
S9863	9WPLV/LED/835/DR/2P	9	G24d	FR	3500K	850	82	120°	4.69	50K	045923098635	50/10
S9864	9WPLV/LED/840/DR/2P	9	G24d	FR	4000K	900	82	120°	4.69	50K	045923098642	50/10
S9865	9WPLV/LED/850/DR/2P	9	G24d	FR	5000K	900	82	120°	4.69	50K	045923098659	50/10

Product sheet SA1979

PL/LED
BALLAST BYPASS TYPE B
REPLACEMENT LAMPS

Features:

- UL Classified
- 2-pin replacement for up to 26 Watt pin based CFL, uses only 9 Watts
- 2-pin LED lamps works in both 2-pin (magnetic) and 4-pin (electronic) sockets
- G24d (2-pin)—18 and 26W rep.
- G24q (4-pin)—13, 18, and 26 rep.
- Direct wire 120-277V
- Instant on to full brightness / no flickering
- Rotates up to 270° for various fixture applications
- Vertical and horizontal options
- Up to 70% energy saving
- Damp location
- Long life—50,000 hours
- 5 Year warranty

For vertical applications.

For horizontal applications.









Beam Angle: 120°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
Horizontal														
S8530	9WPLH/LED/827/BP/2P	9	120-277	PL	G24d	FR	2700K	900	82	120°	6.63	50K	045923085307	50/10
S8531	9WPLH/LED/830/BP/2P	9	120-277	PL	G24d	FR	3000K	950	82	120°	6.63	50K	045923085314	50/10
S8532	9WPLH/LED/835/BP/2P	9	120-277	PL	G24d	FR	3500K	950	82	120°	6.63	50K	045923085321	50/10
S8533	9WPLH/LED/840/BP/2P	9	120-277	PL	G24d	FR	4000K	1000	82	120°	6.63	50K	045923085338	50/10
S8534	9WPLH/LED/850/BP/2P	9	120-277	PL	G24d	FR	5000K	1000	82	120°	6.63	50K	045923085345	50/10
Vertical														
S8535	9WPLV/LED/827/BP/2P	9	120-277	PL	G24d	FR	2700K	900	82	120°	4.69	50K	045923085352	50/10
S8536	9WPLV/LED/830/BP/2P	9	120-277	PL	G24d	FR	3000K	950	82	120°	4.69	50K	045923085369	50/10
S8537	9WPLV/LED/835/BP/2P	9	120-277	PL	G24d	FR	3500K	950	82	120°	4.69	50K	045923085376	50/10
S8538	9WPLV/LED/840/BP/2P	9	120-277	PL	G24d	FR	4000K	1000	82	120°	4.69	50K	045923085383	50/10
S8539	9WPLV/LED/850/BP/2P	9	120-277	PL	G24d	FR	5000K	1000	82	120°	4.69	50K	045923085390	50/10

Product sheet SA2328

LED/CFL TYPE A DIRECT REPLACEMENT LAMPS 4-PIN (ELECTRONIC BALLASTS*)

Features:

- UL listed 4-pin 42 Watt direct replacement*
- 4-pin lamps fit GX24q-4 sockets
- No re-wiring needed
- Instant on to full brightness / no flickering
- Vertical and horizontal options
- DLC Listed
- c-UL-us listed
- Up to 60% energy saving
- Long life—50,000 hours
- 5 Year warranty

For vertical applications.



Vertical Beam Angle: 110°



Horizontal Beam Angle: 100°

Rotates 270° when installed

For horizontal applications.

Item	Description	W	Base	Finish	CCT	Lm	CRI	Beam	MOL (in)	Life (hrs.)	UPC	Pack
Horizontal												
S21400	PLT/16W/H/LED/830/4P/DR	16	G24q	FR	3000K	1750	82	100°	6.44	50K	045923224003	20/10
S21401	PLT/16W/H/LED/835/4P/DR	16	G24q	FR	3500K	1750	82	100°	6.44	50K	045923224010	20/10
S21402	PLT/16W/H/LED/840/4P/DR	16	G24q	FR	4000K	1850	82	100°	6.44	50K	045923224027	20/10
S21403	PLT/16W/H/LED/850/4P/DR	16	G24q	FR	5000K	1850	82	100°	6.44	50K	045923224034	20/10
Vertical												
S21404	PLT/16W/V/LED/830/4P/DR	16	G24q	FR	3000K	1750	82	110°	5.19	50K	045923224041	20/10
S21405	PLT/16W/V/LED/835/4P/DR	16	G24q	FR	3500K	1750	82	110°	5.19	50K	045923224058	20/10
S21406	PLT/16W/V/LED/840/4P/DR	16	G24q	FR	4000K	1850	82	110°	5.19	50K	045923224065	20/10
S21407	PLT/16W/V/LED/850/4P/DR	16	G24q	FR	5000K	1850	82	110°	5.19	50K	045923224072	20/10

*Visit www.satco.com for ballast compatibility list.

Product sheet SA2471

LED/CFL BALLAST BYPASS TYPE B REPLACEMENT LAMPS
GU24 BASE, E26 BASE

Features:

- GU24 Base and E26 Base are 13-18 Watt CFL and 60 Watt Incandescent direct replacements
- Instant on to full brightness / no flickering
- Rotates up to 270° for various fixture applications
- Vertical and horizontal options
- Up to 70% energy saving
- c-UL-us listed—GU24 base, E26 base
- Long life—50,000 hours
- 5 Year warranty

E26 GU24

Rotates 270° when installed



Beam Angle: 120°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	MOL (in.)	MOD (in.)	Life (hrs.)	UPC	Pack
GU24 Base														
S8745	8W/H/LED/CFL/827/GU24/120-277V	8	120-277	PL	GU24	FR	2700K	920	83	6.41	1.38	50K	045923087455	50/10
S8746	8W/H/LED/CFL/830/GU24/120-277V	8	120-277	PL	GU24	FR	3000K	920	83	6.41	1.38	50K	045923087462	50/10
S8747	8W/H/LED/CFL/835/GU24/120-277V	8	120-277	PL	GU24	FR	3500K	960	83	6.41	1.38	50K	045923087479	50/10
S8748	8W/H/LED/CFL/840/GU24/120-277V	8	120-277	PL	GU24	FR	4000K	960	83	6.41	1.38	50K	045923087486	50/10
S8749	8W/H/LED/CFL/850/GU24/120-277V	8	120-277	PL	GU24	FR	5000K	960	83	6.41	1.38	50K	045923087493	50/10
E26 Base														
S8755	8W/H/LED/CFL/827/E26/120-277V	8	120-277	PL	E26	FR	2700K	920	83	6.88	1.38	50K	045923087554	50/10
S8756	8W/H/LED/CFL/830/E26/120-277V	8	120-277	PL	E26	FR	3000K	920	83	6.88	1.38	50K	045923087561	50/10
S8757	8W/H/LED/CFL/835/E26/120-277V	8	120-277	PL	E26	FR	3500K	960	83	6.88	1.38	50K	045923087578	50/10
S8758	8W/H/LED/CFL/840/E26/120-277V	8	120-277	PL	E26	FR	4000K	960	83	6.88	1.38	50K	045923087585	50/10
S8759	8W/H/LED/CFL/850/E26/120-277V	8	120-277	PL	E26	FR	5000K	960	83	6.88	1.38	50K	045923087592	50/10

Product sheet SA2119

2G11 PLL 36W & 40W TYPE B BALLAST BYPASS REPLACEMENT FOR 4-PIN PL-L

Features:

- Direct wire 120-277V
- All glass tube
- Over 40% energy savings
- Instant on to full brightness/no flickering
- c-UL-us classified
- Long life—50,000 hours
- 5 Year warranty

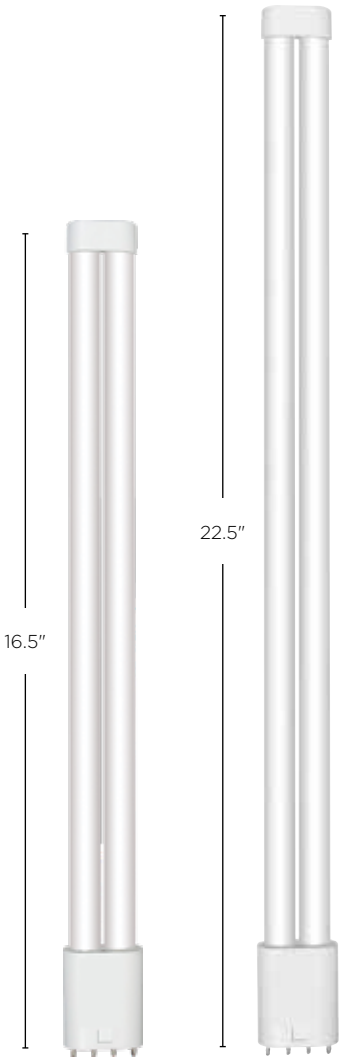

15W 23W





Beam Angle: 360°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
S9952	15PLL/LED/835/BP	15	120-277	T5	2G11	FR	3500K	1900	80	360°	16.50	50K	045923099526	10
S9953	15PLL/LED/840/BP	15	120-277	T5	2G11	FR	4000K	2000	80	360°	16.50	50K	045923099533	10
S9950◆	23PLL/LED/835/BP	23	120-277	T5	2G11	FR	3500K	2800	82	360°	22.50	50K	045923099502	10
S9951◆	23PLL/LED/840/BP	23	120-277	T5	2G11	FR	4000K	2800	82	360°	22.50	50K	045923099519	10

Product sheet SA2194

T8 LED 2′, 3′, & 4′ TYPE A LAMPS - BALLAST COMPATIBLE

Features:

- High efficiency – up to 163 LPW
- Plug and play replacement*
- All glass tubes: no aging, yellowing or bending
- Integrated thermal fuse at pins
- DLC 5.1
- Operating Temperature Range: -20°C(-4°F) to a maximum of +45°C(+113°F)
- Long life—50,000 hours
- Compatible with most instant start, rapid start T8 electronic ballasts and some emergency and dimming ballasts*
- Approved for use with tube guards when operated on Low or Normal ballast factor systems

*May not be compatible with all IS, RS, DM and EM ballasts. Visit www.satco.com for an approved list.

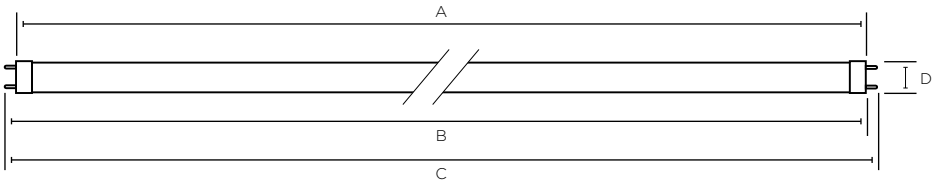



Beam Angle: 210°

Size	WATTAGE	A Min (inch)	A Max (inch)	B Min (inch)	B Max (inch)	C Min (inch)	C Max (inch)	D Min (inch)	D Max (inch)
2 Foot	8W	—	23.21	23.40	23.50	23.67	23.78	0.98	1.02
3 Foot	10W	—	35.22	35.40	35.50	35.67	35.78	0.98	1.02
4 Foot	9.5W/11W/14W	—	47.22	47.40	47.50	47.67	47.78	0.98	1.02

Item	Description	W	Base	Finish	CCT	Lm	CRI	Beam	MOL (in)	Nominal (in)	Life (hrs.)	UPC	Pack
2′ LED 8W T8													
S49946	8T8/LED/24-830/DR	8	G13	GLOSS WH	3000K	1250	82	210°	23.78	24.00	50K	045923499463	25
S49947	8T8/LED/24-835/DR	8	G13	GLOSS WH	3500K	1250	82	210°	23.78	24.00	50K	045923499470	25
S49948	8T8/LED/24-840/DR	8	G13	GLOSS WH	4000K	1250	82	210°	23.78	24.00	50K	045923499487	25
S49949	8T8/LED/24-850/DR	8	G13	GLOSS WH	5000K	1250	82	210°	23.78	24.00	50K	045923499494	25
3′ LED 10W T8													
S49990	10T8/LED/36-830/DR	10	G13	GLOSS WH	3000K	1450	82	210°	35.78	36.00	50K	045923499906	25
S49991	10T8/LED/36-835/DR	10	G13	GLOSS WH	3500K	1450	82	210°	35.78	36.00	50K	045923499913	25
S49992	10T8/LED/36-840/DR	10	G13	GLOSS WH	4000K	1450	82	210°	35.78	36.00	50K	045923499920	25
S49993	10T8/LED/36-850/DR	10	G13	GLOSS WH	5000K	1450	82	210°	35.78	36.00	50K	045923499937	25
4′ LED 9.5W T8													
S11740	9.5/T8/LED/48-830/DR	9.5	G13	GLOSS WH	3000K	1740	82	210°	47.78	48.00	50K	045923117404	25
S11741	9.5/T8/LED/48-835/DR	9.5	G13	GLOSS WH	3500K	1740	82	210°	47.78	48.00	50K	045923117411	25
S11742	9.5/T8/LED/48-840/DR	9.5	G13	GLOSS WH	4000K	1740	82	210°	47.78	48.00	50K	045923117428	25
S11743	9.5/T8/LED/48-850/DR	9.5	G13	GLOSS WH	5000K	1740	82	210°	47.78	48.00	50K	045923117435	25
4′ LED 11W T8													
S49934	11/T8/LED/48-830/DR	11	G13	GLOSS WH	3000K	1800	82	210°	47.78	48.00	50K	045923499340	25
S49935	11/T8/LED/48-835/DR	11	G13	GLOSS WH	3500K	1800	82	210°	47.78	48.00	50K	045923499357	25
S49936	11/T8/LED/48-840/DR	11	G13	GLOSS WH	4000K	1800	82	210°	47.78	48.00	50K	045923499364	25
S49937	11/T8/LED/48-850/DR	11	G13	GLOSS WH	5000K	1800	82	210°	47.78	48.00	50K	045923499371	25
4′ LED 14W T8													
S49975	14/T8/LED/48-830/DR	14	G13	GLOSS WH	3000K	2200	82	210°	47.78	48.00	50K	045923499753	25
S49976	14/T8/LED/48-835/DR	14	G13	GLOSS WH	3500K	2200	82	210°	47.78	48.00	50K	045923499760	25
S49977	14/T8/LED/48-840/DR	14	G13	GLOSS WH	4000K	2200	82	210°	47.78	48.00	50K	045923499777	25
S49978	14/T8/LED/48-850/DR	14	G13	GLOSS WH	5000K	2200	82	210°	47.78	48.00	50K	045923499784	25

Product sheet SA2756

T8 LED 2′, 3′, & 4′
TYPE B LAMPS - BALLAST BYPASS

Features:

- Single or double ending wiring*
- Installation protection**
- All-glass tube
- Direct wire 120-277 line voltage
- Damp location
- DLC Listed
- Long life—50,000 Hours

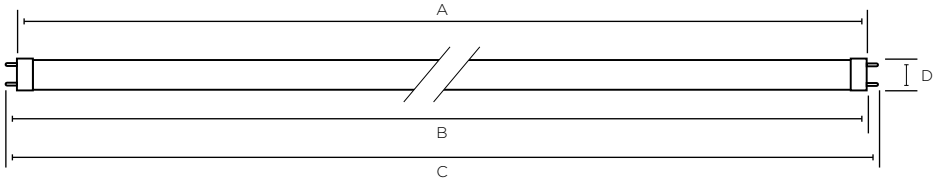



Beam Angle: 210°

Dimensions

Size	WATTAGE	A Length (in.)	B Length (in.)	C Length (in.)	D Length (in.)
2 Foot	9W	23.21	23.50	23.78	1.02
3 Foot	12W	35.22	35.50	35.78	1.02
4 Foot	10.5W/14W/17W	47.22	47.50	47.78	1.02

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
2′ LED T8															
S39900	9T8/LED/24-830/BP/SE-DE	9	120-277	T8	G13	GLOSS WH	3000K	1100	82	210°	24.00	23.78	50K	045923399008	25
S39901	9T8/LED/24-835/BP/SE-DE	9	120-277	T8	G13	GLOSS WH	3500K	1100	82	210°	24.00	23.78	50K	045923399015	25
S39902	9T8/LED/24-840/BP/SE-DE	9	120-277	T8	G13	GLOSS WH	4000K	1150	82	210°	24.00	23.78	50K	045923399022	25
S39903	9T8/LED/24-850/BP/SE-DE	9	120-277	T8	G13	GLOSS WH	5000K	1150	82	210°	24.00	23.78	50K	045923399039	25
3′ LED T8															
S39926	12T8/LED/36-830/BP/SE-DE	12	120-277	T8	G13	GLOSS WH	3000K	1400	82	210°	35.78	36.00	50K	045923399268	25
S39927	12T8/LED/36-835/BP/SE-DE	12	120-277	T8	G13	GLOSS WH	3500K	1400	82	210°	35.78	36.00	50K	045923399275	25
S39928	12T8/LED/36-840/BP/SE-DE	12	120-277	T8	G13	GLOSS WH	4000K	1450	82	210°	35.78	36.00	50K	045923399282	25
S39929	12T8/LED/36-850/BP/SE-DE	12	120-277	T8	G13	GLOSS WH	5000K	1450	82	210°	35.78	36.00	50K	045923399299	25
4′ LED T8															
S11960	10.5T8/LED/48-830/BP/SE-DE	10.5	120-277	T8	G13	GLOSS WH	3000K	1700	82	210°	47.78	48.00	50K	045923119606	25
S11961	10.5T8/LED/48-835/BP/SE-DE	10.5	120-277	T8	G13	GLOSS WH	3500K	1700	82	210°	47.78	48.00	50K	045923119613	25
S11962	10.5T8/LED/48-840/BP/SE-DE	10.5	120-277	T8	G13	GLOSS WH	4000K	1700	82	210°	47.78	48.00	50K	045923119620	25
S11963	10.5T8/LED/48-850/BP/SE-DE	10.5	120-277	T8	G13	GLOSS WH	5000K	1700	82	210°	47.78	48.00	50K	045923119637	25
S39913	14T8/LED/48-830/BP/SE-DE	14	120-277	T8	G13	GLOSS WH	3000K	1700	82	210°	47.78	48.00	50K	045923399138	25
S39914	14T8/LED/48-835/BP/SE-DE	14	120-277	T8	G13	GLOSS WH	3500K	1700	82	210°	47.78	48.00	50K	045923399145	25
S39915	14T8/LED/48-840/BP/SE-DE	14	120-277	T8	G13	GLOSS WH	4000K	1800	82	210°	47.78	48.00	50K	045923399152	25
S39916	14T8/LED/48-850/BP/SE-DE	14	120-277	T8	G13	GLOSS WH	5000K	1800	82	210°	47.78	48.00	50K	045923399169	25
S21924	14T8/LED/48-865/BP/SE-DE	14	120-277	T8	G13	GLOSS WH	6500K	1800	82	210°	47.78	48.00	50K	045923219245	25
S39904	17T8/LED/48-830/BP/SE-DE	17	120-277	T8	G13	GLOSS WH	3000K	2100	82	210°	47.78	48.00	50K	045923399046	25
S39905	17T8/LED/48-835/BP/SE-DE	17	120-277	T8	G13	GLOSS WH	3500K	2100	82	210°	47.78	48.00	50K	045923399053	25
S39906	17T8/LED/48-840/BP/SE-DE	17	120-277	T8	G13	GLOSS WH	4000K	2200	82	210°	47.78	48.00	50K	045923399060	25
S39907	17T8/LED/48-850/BP/SE-DE	17	120-277	T8	G13	GLOSS WH	5000K	2200	82	210°	47.78	48.00	50K	045923399077	25

*Single ended wiring requires non-shunted sockets.
**Protection against improper installation. Lamps will not light if the ballast has not been bypassed.

Product sheet SA2420

2′, 3′, & 4′ LED T8 USA BAA COMPLIANT TYPE B BALLAST BYPASS LAMPS

Features:

- Buy American Act (BAA)
- Single or double ended wiring*
- Installation protection**
- All-glass tubes
- Direct wire 120-277V line voltage
- Suitable for damp locations
- DLC 5.1
- Operating temp. -20°C/-4°F to 45°C/113°F
- Compatible with Satco S8000 and S8002 LED EM Driver
- Long life—50,000 hours

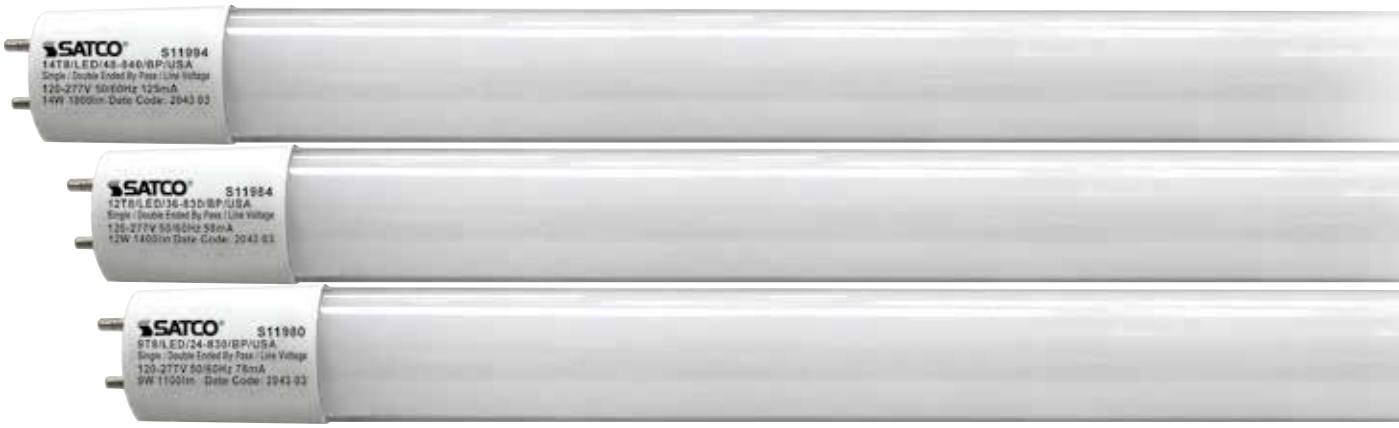

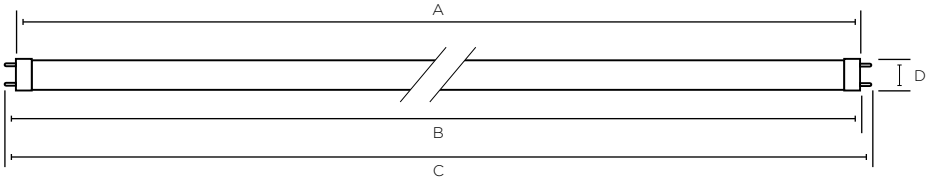



Beam Angle: 210°

Dimensions

Size	WATTAGE	A Length (in.)	B Length (in.)	C Length (in.)	D Length (in.)
2 Foot	9W	23.21	23.50	23.78	1.02
3 Foot	12W	35.22	35.50	35.78	1.02
4 Foot	10.5W/14W/17W	47.22	47.50	47.78	1.02

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
2′ LED T8															
S11980	9T8/LED/24-830/BP/USA	9	120-277	T8	G13	FR	3000K	1100	82	210°	23.78	24.00	50K	045923119804	25
S11981	9T8/LED/24-835/BP/USA	9	120-277	T8	G13	FR	3500K	1100	82	210°	23.78	24.00	50K	045923119811	25
S11982	9T8/LED/24-840/BP/USA	9	120-277	T8	G13	FR	4000K	1150	82	210°	23.78	24.00	50K	045923119828	25
S11983	9T8/LED/24-850/BP/USA	9	120-277	T8	G13	FR	5000K	1150	82	210°	23.78	24.00	50K	045923119835	25
3′ LED T8															
S11984	12T8/LED/36-830/BP/USA	12	120-277	T8	G13	FR	3000K	1400	82	210°	35.78	36.00	50K	045923119842	25
S11985	12T8/LED/36-835/BP/USA	12	120-277	T8	G13	FR	3500K	1400	82	210°	35.78	36.00	50K	045923119859	25
S11986	12T8/LED/36-840/BP/USA	12	120-277	T8	G13	FR	4000K	1450	82	210°	35.78	36.00	50K	045923119866	25
S11987	12T8/LED/36-850/BP/USA	12	120-277	T8	G13	FR	5000K	1450	82	210°	35.78	36.00	50K	045923119873	25
4′ LED T8															
S11988	10.5T8/LED/48-830/BP/USA	10.5	120-277	T8	G13	FR	3000K	1700	82	210°	47.78	48.00	50K	045923119880	25
S11989	10.5T8/LED/48-835/BP/USA	10.5	120-277	T8	G13	FR	3500K	1700	82	210°	47.78	48.00	50K	045923119897	25
S11990	10.5T8/LED/48-840/BP/USA	10.5	120-277	T8	G13	FR	4000K	1700	82	210°	47.78	48.00	50K	045923119903	25
S11991	10.5T8/LED/48-850/BP/USA	10.5	120-277	T8	G13	FR	5000K	1700	82	210°	47.78	48.00	50K	045923119910	25
S11992	14T8/LED/48-830/BP/USA	14	120-277	T8	G13	FR	3000K	1700	82	210°	47.78	48.00	50K	045923119927	25
S11993	14T8/LED/48-835/BP/USA	14	120-277	T8	G13	FR	3500K	1700	82	210°	47.78	48.00	50K	045923119934	25
S11994	14T8/LED/48-840/BP/USA	14	120-277	T8	G13	FR	4000K	1800	82	210°	47.78	48.00	50K	045923119941	25
S11995	14T8/LED/48-850/BP/USA	14	120-277	T8	G13	FR	5000K	1800	82	210°	47.78	48.00	50K	045923119958	25
S11996	17T8/LED/48-830/BP/USA	17	120-277	T8	G13	FR	3000K	2100	82	210°	47.78	48.00	50K	045923119965	25
S11997	17T8/LED/48-835/BP/USA	17	120-277	T8	G13	FR	3500K	2100	82	210°	47.78	48.00	50K	045923119972	25
S11998	17T8/LED/48-840/BP/USA	17	120-277	T8	G13	FR	4000K	2200	82	210°	47.78	48.00	50K	045923119989	25
S11999	17T8/LED/48-850/BP/USA	17	120-277	T8	G13	FR	5000K	2200	82	210°	47.78	48.00	50K	045923119996	25

*Single ended wiring requires non-shunted sockets.
**Protection against improper installation. Lamps will not light if the ballast has not been bypassed.

Product sheet SA2796

DIMMABLE 13.5W LINEAR LED T8 BALLAST BYPASS TYPE B LAMPS

Features:

- No ballast or external driver required
- Direct wire 120V line voltage
- All glass tube
- Dimmable†
- Damp location
- Long life: 50,000 hours
- c-UL-us Classified
- DLC Listed
- NSF Certified
- 5 Year warranty

Single Ended Wiring*

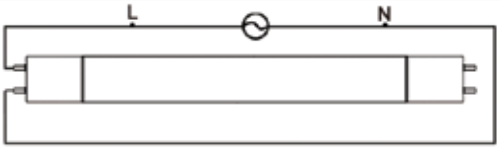

(Non-shunted sockets)



Beam Angle: 220°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11920	13.5T8/LED/48-830/DIM-BP	13.5	120	T8	G13	FR	3000K	1700	82	220°	47.78	48.00	50K	045923119200	25
S11921	13.5T8/LED/48-835/DIM-BP	13.5	120	T8	G13	FR	3500K	1700	82	220°	47.78	48.00	50K	045923119217	25
S11922	13.5T8/LED/48-840/DIM-BP	13.5	120	T8	G13	FR	4000K	1800	82	220°	47.78	48.00	50K	045923119224	25
S11923	13.5T8/LED/48-850/DIM-BP	13.5	120	T8	G13	FR	5000K	1800	82	220°	47.78	48.00	50K	045923119231	25

†Visit satco.com for compatible dimmers.

Product sheet SA2533

PREMIUM LED T8 BALLAST BYPASS TYPE B, TRUE FLICKER-FREE LAMPS

Features:

- No ballast or external driver required
- Flicker free — Less than 2%
- Installation protection — will not light if ballast is not bypassed
- Lower wattage option
- High lumen — up to 2600
- Direct wire 120-277V line voltage*
- All glass tube
- PET Coated — shatterproof
- Long life: 50,000 hours
- c-UL-us Classified
- ETL Sanitation listed (conforms to NSF)
- DLC Listed
- 5 Year warranty

2 Installation Options

1. Double Ended Wiring



2. Single Ended Wiring



(Non-shunted sockets)



Beam Angle: 190°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11910	11.5T8/LED/48-830/BP 120-277V	11.5	120-277	T8	G13	FR	3000K	1650	80	180°	47.78	48.00	50K	045923119101	25
S11911	11.5T8/LED/48-835/BP 120-277V	11.5	120-277	T8	G13	FR	3500K	1650	80	180°	47.78	48.00	50K	045923119118	25
S11912	11.5T8/LED/48-840/BP 120-277V	11.5	120-277	T8	G13	FR	4000K	1750	80	180°	47.78	48.00	50K	045923119125	25
S11913	11.5T8/LED/48-850/BP 120-277V	11.5	120-277	T8	G13	FR	5000K	1800	80	180°	47.78	48.00	50K	045923119132	25
S11914	18.5T8/LED/48-830/BP 120-277V	18.5	120-277	T8	G13	FR	3000K	2400	80	180°	47.78	48.00	50K	045923119149	25
S11915	18.5T8/LED/48-835/BP 120-277V	18.5	120-277	T8	G13	FR	3500K	2400	80	180°	47.78	48.00	50K	045923119156	25
S11916	18.5T8/LED/48-840/BP 120-277V	18.5	120-277	T8	G13	FR	4000K	2500	80	180°	47.78	48.00	50K	045923119163	25
S11917	18.5T8/LED/48-850/BP 120-277V	18.5	120-277	T8	G13	FR	5000K	2600	80	180°	47.78	48.00	50K	045923119170	25

Product sheet SA2527

5′ & 6′ BALLAST BYPASS - TYPE B REPLACEMENTS FOR MED. BI-PIN LINEAR T8 LAMPS

Features:

- No ballast required
- Increased efficiency
- Single ended wiring/ non-shunted sockets
- 60″ and 70″ Lengths
- All glass tube
- Damp Location
- ETL Sanitation listed (conforms to NSF)
- Long Life—50,000 Hours

Applications:

- Designed for cold temperature applications

Wiring Diagram

Retrofit luminaire with magnetic ballast

Wiring harnesses available including non-shunted sockets, sold separately

Item	Description
80-2626	1 LT BALLAST BYPASS WIRING HARNESS
80-2627	2 LT BALLAST BYPASS WIRING HARNESS
80-2628	3 LT BALLAST BYPASS WIRING HARNESS
80-2629	4 LT BALLAST BYPASS WIRING HARNESS

TYPE B | BALLAST BYPASS | DAMP LOCATION

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11953	22T8/LED/60-840/BP	22	120-277	T8	G13	FR	4000K	2800	83	160°	60.00	60.00	50K	045923119538	10
S11954	22T8/LED/60-850/BP	22	120-277	T8	G13	FR	5000K	2800	83	160°	60.00	60.00	50K	045923119545	10
S11955	30T8/LED/70-840/BP	30	120-277	T8	G13	FR	4000K	4000	83	160°	70.00	70.00	50K	045923119552	10
S11956	30T8/LED/70-850/BP	30	120-277	T8	G13	FR	5000K	4000	83	160°	70.00	70.00	50K	045923119569	10

Product sheet SA2390

SLIMLINE 4′, 6′, 8′ T8 BALLAST BYPASS TYPE B

Features:

- Double ended wiring
- Shatterproof coated
- Over 40% energy savings vs standard 8′ T8 systems
- Slimline single pin base - replaces T8 & T12
- No ballast or external driver required
- Direct wire 120-277V line voltage
- All glass tube
- Damp location
- NSF certified
- c-UL-us Classified
- Long life—50,000 hours
- 5 Year warranty

Wiring Diagram



Beam Angle: 210°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11926	14T8/LED/48-840/BP/FA8	14	120-277	T8	FA8	WH	4000K	1900	82	210°	46.00	48.00	50K	045923119262	25
S11927	24T8/LED/72-840/BP/FA8	24	120-277	T8	FA8	WH	4000K	3200	82	210°	70.00	72.00	50K	045923119279	10
S11957◆	24T8/LED/96-835/BP/FA8	24	120-277	T8	FA8	WH	3500K	3200	82	210°	94.00	96.00	50K	045923119576	10
S11958◆	24T8/LED/96-840/BP/FA8	24	120-277	T8	FA8	WH	4000K	3500	82	210°	94.00	96.00	50K	045923119583	10
S11959◆	24T8/LED/96-850/BP/FA8	24	120-277	T8	FA8	WH	5000K	3500	82	210°	94.00	96.00	50K	045923119590	10
S29917◆	40T8/LED/96-835/BP/FA8	40	120-277	T8	FA8	WH	3500K	5300	82	210°	94.00	96.00	50K	045923299179	10
S29918◆	40T8/LED/96-840/BP/FA8	40	120-277	T8	FA8	WH	4000K	5500	82	210°	94.00	96.00	50K	045923299186	10
S29919◆	40T8/LED/96-850/BP/FA8	40	120-277	T8	FA8	WH	5000K	5500	82	210°	94.00	96.00	50K	045923299193	10
S21925	40T8/LED/96-865/BP/FA8	40	120-277	T8	FA8	WH	6500K	5500	82	210°	94.00	96.00	50K	045923219252	10

Product sheet SA2683

R17D LINEAR LED BALLAST BYPASS 4′, 6′& 8′ TYPE B T8

Features:

- Double ended wiring
- Shatterproof coated
- Over 40% energy savings vs standard 8′ T8 systems
- R17d base designed to replace T8 HO and T12 HO
- Fluorescent lamps
- No ballast or external driver required
- Direct wire 120-277V line voltage
- All glass tube
- Damp location
- NSF certified
- c-UL-us Classified
- Long life—50,000 hours
- 5 Year warranty

Wiring Diagram



Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11964	18T8/LED/48-840/BP/R17D/HO	18	120-277	T8	R17d	WH	4000K	2500	82	160°	46.00	48.00	50K	045923119644	10
S11965	18T8/LED/48-865/BP/R17D/HO	18	120-277	T8	R17d	WH	6500K	2500	82	160°	46.00	48.00	50K	045923119651	10
S11966	30T8/LED/72-840/BP/R17D/HO	30	120-277	T8	R17d	WH	4000K	4200	82	160°	70.00	72.00	50K	045923119668	10
S11967	30T8/LED/72-865/BP/R17D/HO	30	120-277	T8	R17d	WH	6500K	4200	82	160°	70.00	72.00	50K	045923119675	10
S29924	40T8/LED/96-840/BP/R17D	40	120-277	T8	R17d	WH	4000K	5500	82	210°	94.00	96.00	50K	045923299247	10
S29925	40T8/LED/96-850/BP/R17D	40	120-277	T8	R17d	WH	5000K	5500	82	210°	94.00	96.00	50K	045923299254	10
S29942	40T8/LED/96-865/BP/R17D	40	120-277	T8	R17d	WH	6500K	5500	82	210°	94.00	96.00	50K	045923299421	10

Product sheet SA2611

25W, 4′ LINEAR LED TYPE A T5 LAMPS

Features:

- Direct replacement for linear fluorescent F54T5HO lamps in existing fixtures with electronic ballasts. No rewiring required
- Over 50% energy savings vs. standard 4′ T5 systems
- All glass tube
- Compatible with rapid start ballast*
- Integrated thermal fuse at pins
- Damp location
- NSF certified
- c-UL-us listed
- DLC listed
- Long life—50,000 hours
- 5 Year warranty

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S29912	25T5/LED/46-835/DR	25	-	T5	G5	GLOSS	3500K	3300	82	185°	46.00	48.00	50K	045923299124	10
S29910	25T5/LED/46-840/DR	25	-	T5	G5	GLOSS	4000K	3500	82	185°	46.00	48.00	50K	045923299100	10
S29911	25T5/LED/46-850/DR	25	-	T5	G5	GLOSS	5000K	3500	82	185°	46.00	48.00	50K	045923299117	10

*May not be compatible with all rapid start ballasts. Visit www.satco.com for an approved list.

Product sheet SA2306

LED T5 TYPE B BALLAST BYPASS

Features:

- Double or Single ended ballast bypass replacement for linear fluorescent T5 HO & HE lamps in existing fixtures.
- No ballast or external driver required
- Available in 2′, 3′ & 4′
- Direct wire 120-277V line voltage
- Single or double-ended wiring
- All glass tube, PET–shatterproof coated
- Damp location
- c-UL-us classified
- NSF certified
- DLC listed◆
- Long life—50,000 hours
- 5 Year warranty

Double Ended Wiring



Single Ended Wiring

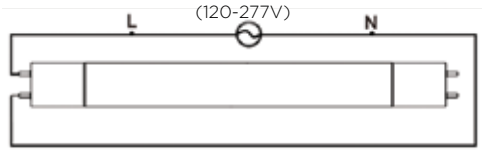



Beam Angle: 240°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S28693	12T5/LED/24-835/BP/HO/SE-DE	12	120-277	T5	G5	FR	3500K	1400	83	240°	22.50	24.00	50K	045923286933	25
S28694	12T5/LED/24-840/BP/HO/SE-DE	12	120-277	T5	G5	FR	4000K	1450	83	240°	22.50	24.00	50K	045923286940	25
S28695	12T5/LED/24-850/BP/HO/SE-DE	12	120-277	T5	G5	FR	5000K	1500	83	240°	22.50	24.00	50K	045923286957	25
S28696	16T5/LED/36-835/BP/HO/SE-DE	16	120-277	T5	G5	FR	3500K	1800	83	240°	34.00	36.00	50K	045923286964	25
S28697	16T5/LED/36-840/BP/HO/SE-DE	16	120-277	T5	G5	FR	4000K	1850	83	240°	34.00	36.00	50K	045923286971	25
S28698	16T5/LED/36-850/BP/HO/SE-DE	16	120-277	T5	G5	FR	5000K	1900	83	240°	34.00	36.00	50K	045923286988	25
S28690◆	13T5/LED/46-835/BP/HE/SE-DE	13	120-277	T5	G5	FR	3500K	1600	83	240°	46.00	48.00	50K	045923286902	25
S28691◆	13T5/LED/46-840/BP/HE/SE-DE	13	120-277	T5	G5	FR	4000K	1650	83	240°	46.00	48.00	50K	045923286919	25
S28692◆	13T5/LED/46-850/BP/HE/SE-DE	13	120-277	T5	G5	FR	5000K	1700	83	240°	46.00	48.00	50K	045923286926	25
S39717◆	25T5/LED/46-835/BP/HO/SE-DE	25	120-277	T5	G5	FR	3500K	3200	83	240°	46.00	48.00	50K	045923397172	25
S39718◆	25T5/LED/46-840/BP/HO/SE-DE	25	120-277	T5	G5	FR	4000K	3300	83	240°	46.00	48.00	50K	045923397189	25
S39719◆	25T5/LED/46-850/BP/HO/SE-DE	25	120-277	T5	G5	FR	5000K	3400	83	240°	46.00	48.00	50K	045923397196	25
S39720	25T5/LED/46-865/BP/HO/SE-DE	25	120-277	T5	G5	FR	6500K	3400	83	240°	46.00	48.00	50K	045923397202	25

LED T5 MINI BI-PIN (G5) BALLAST BYPASS TYPE B

Features:

- Ballast bypass replacement for mini bi-pin linear fluorescent T5 preheat lamps in existing fixtures.
- No ballast or external driver required
- Available in 6", 9", 12", & 21"
- Direct wire 120-277V line voltage
- PET Shatterproof coated
- Damp location
- c-UL-us classified
- Long life—50,000 hours
- 5 Year warranty

Double Ended Wiring

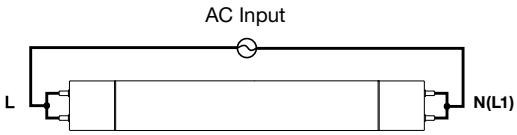



Beam Angle: 240°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11900	2W/LED/T5/840/BP	2	120-277	T5	G5	FR	4000K	150	82	240°	5.91	6.00	50K	045923119002	200/10
S11901	2W/LED/T5/865/BP	2	120-277	T5	G5	FR	6500K	150	82	240°	5.91	6.00	50K	045923119019	200/10
S11902	3W/LED/T5/840/BP	3	120-277	T5	G5	FR	4000K	270	82	240°	8.91	9.00	50K	045923119026	200/10
S11903	3W/LED/T5/865/BP	3	120-277	T5	G5	FR	6500K	270	82	240°	8.91	9.00	50K	045923119033	200/10
S11904	4W/LED/T5/830/BP	4	120-277	T5	G5	FR	3000K	400	82	240°	11.91	12.00	50K	045923119040	100/10
S11905	4W/LED/T5/840/BP	4	120-277	T5	G5	FR	4000K	400	82	240°	11.91	12.00	50K	045923119057	100/10
S11906	4W/LED/T5/865/BP	4	120-277	T5	G5	FR	6500K	400	82	240°	11.91	12.00	50K	045923119064	100/10
S11907	7W/LED/T5/830/BP	7	120-277	T5	G5	FR	3000K	700	82	240°	20.91	21.00	50K	045923119071	100/10
S11908	7W/LED/T5/840/BP	7	120-277	T5	G5	FR	4000K	700	82	240°	20.91	21.00	50K	045923119088	100/10
S11909	7W/LED/T5/865/BP	7	120-277	T5	G5	FR	6500K	700	82	240°	20.91	21.00	50K	045923119095	100/10

Product sheet SA2463

7W LINEAR LED T8
TYPE B
BALLAST BYPASS LAMPS

Features:

- F15T8 Replacement 7W, 18" LED
- Works with existing sockets – shunted or non-shunted
- No ballast or external driver required
- Built-in shock resistant circuit
- Direct wire 120-277V
- All glass tube with PET Shatterproof Coating
- ETL Conforms to NSF Standards
- Long life—50,000 hours
- 5 Year warranty

Single or double ended wiring

Double Ended Wiring



Single Ended Wiring



Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11950	7T8/LED/18-830/BP	7	120-277	T8	G13	FR	3000K	700	83	160°	17.8	18.00	50K	045923119507	25
S11951	7T8/LED/18-840/BP	7	120-277	T8	G13	FR	4000K	750	83	160°	17.8	18.00	50K	045923119514	25
S11952	7T8/LED/18-865/BP	7	120-277	T8	G13	FR	6500K	770	83	160°	17.8	18.00	50K	045923119521	25

Product sheet SA2739

LED T8 DUAL MODE (BALLAST BYPASS/ BALLAST COMPATIBLE) TYPE A & B 6″ U-BEND LAMPS

Features:

- Direct replacements for fluorescent u-bend lamps in existing fixtures with or without ballasts
- Up to 60% energy savings vs. Standard T8 systems
- Ballast compatible* and ballast bypass in one lamp
- Bypass mode works in single or double ended wiring††
- Protection from arcing***
- Shatterproof plastic
- 5 Year warranty

WIRING OPTIONS–BALLAST BYPASS†† TYPE B - 120-277V

Wiring–Ballast Compatible Type A

Compatible with emergency and dimming ballasts*

For instant start ballasts on the approved list, ensure that LED fluorescent sockets are wired in a shunt configuration according to manufacturer's wiring diagram.

For rapid start ballasts on the approved list, non-shunted LED/fluorescent sockets are needed and must be wired according to manufacturer's wiring diagram.

Wiring–Ballast Bypass Type B - 120-277V

Single Ended —
Non-Shunted Sockets

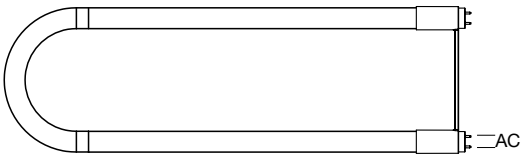

Double Ended —
Non-Shunted Sockets

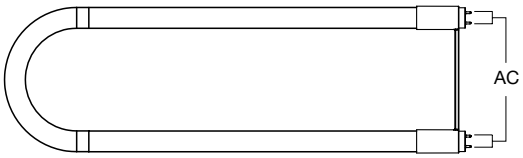

Double Ended —
Shunted Sockets

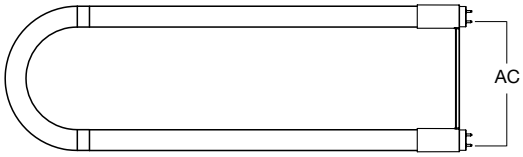

Item	Description	W	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11970	13T8U6/LED/22.5-830/DUAL	13	T8	G13	FR	3000K	1900	83	160°	22.50	22.50	50K	045923119705	12
S11971	13T8U6/LED/22.5-835/DUAL	13	T8	G13	FR	3500K	1950	83	160°	22.50	22.50	50K	045923119712	12
S11972	13T8U6/LED/22.5-840/DUAL	13	T8	G13	FR	4000K	2000	83	160°	22.50	22.50	50K	045923119729	12
S11973	13T8U6/LED/22.5-850/DUAL	13	T8	G13	FR	5000K	2000	83	160°	22.50	22.50	50K	045923119736	12

*May not be compatible with all instant start, rapid start, dimmable and emergency ballasts. Visit www.satco.com for an approved list.

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S11970	13T8U6/LED/22.5-830/DUAL	13	120-277	T8	G13	FR	3000K	1900	83	160°	22.50	22.50	50K	045923119705	12
S11971	13T8U6/LED/22.5-835/DUAL	13	120-277	T8	G13	FR	3500K	1950	83	160°	22.50	22.50	50K	045923119712	12
S11972	13T8U6/LED/22.5-840/DUAL	13	120-277	T8	G13	FR	4000K	2000	83	160°	22.50	22.50	50K	045923119729	12
S11973	13T8U6/LED/22.5-850/DUAL	13	120-277	T8	G13	FR	5000K	2000	83	160°	22.50	22.50	50K	045923119736	12

** Bypass mode works wired as a single ended lamp on non-shunted sockets or as a double ended lamp on either shunted or non-shunted sockets.

System Performance - Type A mode based on ballast factor

System Performance Chart				Bare Lamp (Rated)		Bare Lamp Wattage			System Wattage			Initial Lumens			Lifetime		
Item	Description	CCT	Length (ft)	Nominal Wattage	Nominal Lumens	LBF (0.78)	NBF (0.88)	HBF (1.18)	LBF (0.78)	NBF (0.88)	HBF (1.18)	LBF (0.78)	NBF (0.88)	HBF (1.18)	LBF (0.78) Khrs.	NBF (0.88) Khrs.	HBF (1.18)† Khrs.
S11970	13T8U6/LED/22.5-830/DUAL	3000K	2	13	1900	11.0	13.0	18	14.0	16.0	21.0	1600	1800	2350	>50	>50	<50
S11971	13T8U6/LED/22.5-835/DUAL	3500K	2	13	1950	11.0	13.0	18	14.0	16.0	21.0	1600	1800	2350	>50	>50	<50
S11972	13T8U6/LED/22.5-840/DUAL	4000K	2	13	2000	11.0	13.0	18	14.0	16.0	21.0	1700	1900	2500	>50	>50	<50
S11973	13T8U6/LED/22.5-850/DUAL	5000K	2	13	2000	11.0	13.0	18	14.0	16.0	21.0	1750	2000	2600	>50	>50	<50

*** Power must be turned off prior to installing lamps. Sockets must be in good working order, not broken, cracked or electrically compromised. If arcing occurs at the lamp pin, thermal fuse may activate to avoid overheating of lamp.
† LED tube life will change with ballast factor, configurations producing ballast factors above 1.18 are not allowed.
§ Visit www.satco.com for warranty conditions.

Product sheet SA2510

LED T8 DUAL MODE (BALLAST BYPASS TYPE B/ BALLAST COMPATIBLE TYPE A) 1-5/8" U-BEND LAMPS

Features:

- Direct replacements for fluorescent T8 u-bend lamps in existing fixtures with or without ballasts.
- Over 50% energy savings vs. standard T8 systems
- Ballast compatible and ballast bypass in one lamp
- Bypass mode works in single or double ended wiring†
- Protection from arcing
- 120-277V in bypass mode
- Damp location
- NSF certified
- DLC 5.1 listed
- C-UL-us listed—ballast compatible
- c-UL-us Classified—ballast bypass
- Long life—50,000 hours
- 5 Year warranty

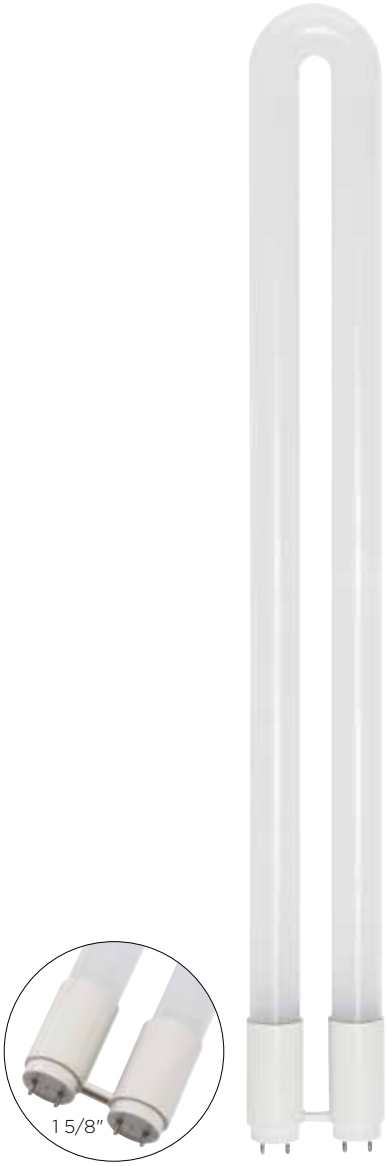

Ballast Compatible

Item	Description	W	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S18450	13T8/U1-G13/LED/830/DUAL	13	T8	G13	FR	3000K	1800	80	160°	22.59	22.50	50K	045923184505	24
S18451	13T8/U1-G13/LED/835/DUAL	13	T8	G13	FR	3500K	1800	80	160°	22.59	22.50	50K	045923184512	24
S18452	13T8/U1-G13/LED/840/DUAL	13	T8	G13	FR	4000K	1900	80	160°	22.59	22.50	50K	045923184529	24
S18453	13T8/U1-G13/LED/850/DUAL	13	T8	G13	FR	5000K	2000	80	160°	22.59	22.50	50K	045923184536	24

† May not be compatible with all instant start, rapid start, dimmable, and emergency ballasts.
Visit www.satco.com for an approved list.

Product sheet SA2462

Ballast Bypass

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S18450	13T8/U1-G13/LED/830/DUAL	13	120-277	T8	G13	FR	3000K	1800	80	160°	22.59	22.50	50K	045923184505	24
S18451	13T8/U1-G13/LED/835/DUAL	13	120-277	T8	G13	FR	3500K	1800	80	160°	22.59	22.50	50K	045923184512	24
S18452	13T8/U1-G13/LED/840/DUAL	13	120-277	T8	G13	FR	4000K	1900	80	160°	22.59	22.50	50K	045923184529	24
S18453	13T8/U1-G13/LED/850/DUAL	13	120-277	T8	G13	FR	5000K	2000	80	160°	22.59	22.50	50K	045923184536	24

Product sheet SA2462

PREMIUM LED T8 DUAL MODE (BALLAST BYPASS TYPE B/ BALLAST COMPATIBLE TYPE A) LINEAR LAMPS

Features:

- Direct replacements for fluorescent T8 lamps in existing fixtures with or without ballasts.
- Over 40% energy savings vs. standard T8 systems
- Ballast compatible (12W) and ballast bypass (13W) in one lamp
- Bypass mode works in single or double ended wiring††
- Protection from arcing***
- All glass tube
- Compatible with emergency and dimming ballast† 120-277V in bypass mode
- Damp location
- PET coated
- NSF certified
- DLC 5.1 listed
- C-UL-us listed—ballast compatible
- c-UL-us Classified—ballast bypass
- Long life—50,000 hours
- 5 Year warranty

*** Power must be turned off prior to installing lamps. Sockets must be in good working order, not broken, cracked or electrically compromised. If arcing occurs at the lamp pin, thermal fuse may activate to avoid overheating of lamp.

Ballast Compatible†

Item	Description	W	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S8890	12T8/LED/48-830/DUAL/BP-DR	12	T8	G13	FR	3000K	1800	83	240°	47.78	48.00	50K	045923088902	25
S8891	12T8/LED/48-835/DUAL/BP-DR	12	T8	G13	FR	3500K	1800	83	240°	47.78	48.00	50K	045923088919	25
S8892	12T8/LED/48-840/DUAL/BP-DR	12	T8	G13	FR	4000K	1900	83	240°	47.78	48.00	50K	045923088926	25
S8893	12T8/LED/48-850/DUAL/BP-DR	12	T8	G13	FR	5000K	1900	83	240°	47.78	48.00	50K	045923088933	25

†May not be compatible with all instant start, rapid start, dimmable, and emergency ballasts. Visit www.satco.com for an approved list.

Product sheet SA2316

Ballast Bypass††

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S8890	13T8/LED/48-830/DUAL/BP-DR	13	120-277	T8	G13	FR	3000K	1800	83	240°	47.78	48.00	50K	045923088902	25
S8891	13T8/LED/48-835/DUAL/BP-DR	13	120-277	T8	G13	FR	3500K	1800	83	240°	47.78	48.00	50K	045923088919	25
S8892	13T8/LED/48-840/DUAL/BP-DR	13	120-277	T8	G13	FR	4000K	1900	83	240°	47.78	48.00	50K	045923088926	25
S8893	13T8/LED/48-850/DUAL/BP-DR	13	120-277	T8	G13	FR	5000K	1900	83	240°	47.78	48.00	50K	045923088933	25

††Bypass mode works wired as a single ended lamp on non-shunted sockets or as a double ended lamp on either shunted or non-shunted sockets.

Product sheet SA2316

LED DUAL MODE TYPE A + B T8 LINEAR LAMPS

Features:

- Ballast compatible and ballast bypass in one lamp
- Single or double-ended wiring in bypass mode
- Protection from arcing
- All glass tube
- Damp location
- Compatible with Satco S8000 & S8002 EM drivers in bypass mode

SINGLE-ENDED WIRING Using non-shunted lampholders only

Single Lamp

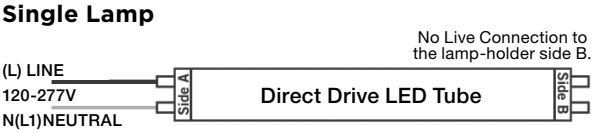

DOUBLE-ENDED WIRING Using shunted lampholders only

Shunted Lampholders - Single Lamp / 120-277V

TYPE A

Ballast Compatible - Type A

Item	Description	W	Bulb Type	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
S11974	12T8/48-830/DM/A-B	12	T8	G13	FR	3000K	1700	82	210°	48	50K	045923119743	25
S11975	12T8/48-835/DM/A-B	12	T8	G13	FR	3500K	1700	82	210°	48	50K	045923119750	25
S11976	12T8/48-840/DM/A-B	12	T8	G13	FR	4000K	1800	82	210°	48	50K	045923119767	25
S11977	12T8/48-850/DM/A-B	12	T8	G13	FR	5000K	1800	82	210°	48	50K	045923119774	25

TYPE B

Ballast Bypass - Type B

Item	Description	W	V	Bulb Type	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
S11974	12T8/48-830/DM/A-B	12	120-277	T8	G13	FR	3000K	1700	82	210°	48	50K	045923119743	25
S11975	12T8/48-835/DM/A-B	12	120-277	T8	G13	FR	3500K	1700	82	210°	48	50K	045923119750	25
S11976	12T8/48-840/DM/A-B	12	120-277	T8	G13	FR	4000K	1800	82	210°	48	50K	045923119767	25
S11977	12T8/48-850/DM/A-B	12	120-277	T8	G13	FR	5000K	1800	82	210°	48	50K	045923119774	25

Product sheet SA2818

CCT SELECTABLE T8 TYPE A & TYPE B LAMPS

Features:

- CCT selectable 4000K, 5000K, 6500K
- 32W T8 Replacements
- Single sleeve or retail-ready 2-pack
- All glass tube
- Damp location
- 50,000 Hours
- 5 Year warranty
- DLC 5.1 Listed

ColorQuick®

Selectable Color Technology



Easy color temperature selection

Retail 2-packs available

* TYPE A c UL us LISTED

** TYPE B CLASSIFIED c UL us

CCT SELECTABLE | DAMP LOCATION | 50,000 HOURS | DLC

Item	Description	W	V	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Life (hrs.)	UPC	Pack
Direct Replacement - Ballast Compatible													
S11918*	10T8/LED/48/CCT-SEL/DR/2PK	10	---	G13	WH	4000K/5000K/6500K	1800	83	220°	48	50K	45923119187	10-2 pks
S11928*	10T8/LED/48/CCT-SEL/DR	10	---	G13	WH	4000K/5000K/6500K	1800	83	220°	48	50K	045923119286	25 pk
Direct Wire - Ballast Bypass													
S11919**	12.5T8/LED/48/CCT-SEL/B/2PK	12.5	120-277	G13	WH	4000K/5000K/6500K	1800	83	220°	48	50K	45923119194	10-2 pks
S11929**	12.5T8/LED/48/CCT-SEL/BP	12.5	120-277	G13	WH	4000K/5000K/6500K	1800	83	220°	48	50K	045923119293	25 pk

Product sheet SA2845

LINEAR LED T8 & T5HO TYPE C SYSTEM

Features:

- Dedicated LED linear lamps and driver system with integral 0-10V dimming. For retrofit and installation in new fixtures
- Driver footprint matches ballast footprint
- High efficiency
- Compatible with instant start wiring
- Low flicker design
- 120-277V, 0-10V Dimming
- 3000, 3500, 4000, 5000K
- 82 CRI
- All glass lamps, damp rated
- DLC listed
- Built-in surge protection
- 50,000 hour life
- 5 Year warranty

Applications:

- Replacement of existing Linear Fluorescent lamps and ballast commonly found in commercial and industrial sites, and new installations

Satco Type C systems include:

- Dedicated LED lamp and driver system
- DLC rated for use in utility programs

S8012
1-2 Lamp driver

S8013
3-4 Lamp driver

S8014
1-2 Lamp driver

S8015
3-4 Lamp driver

Linear LED
T8 Type C

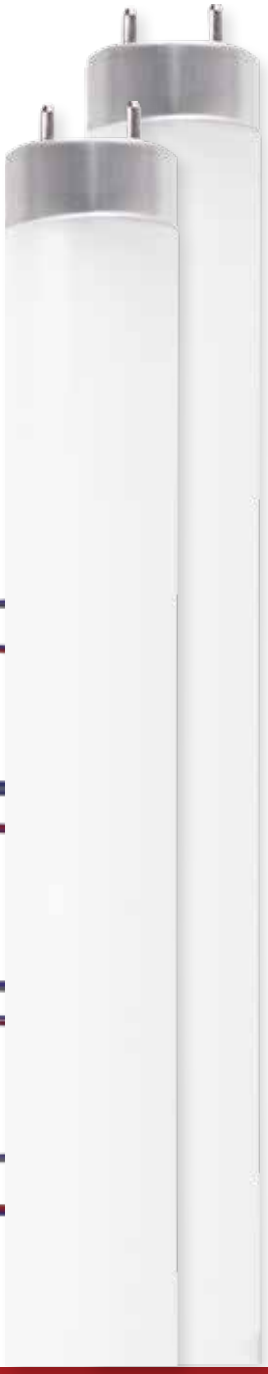

Linear LED
T5 Type C

Note: Fluorescent lamps are not compatible with Type C drivers

LINEAR LED T8 & T5 TYPE C SYSTEM

Linear LED T8 Type C lamps

Item	Description	W	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
2FT														
S11930	8T8/LED/24-830/XD	8	T8	G13	FR	3000K	1200	82	220°	24.00	24.00	50K	045923119309	25
S11931	8T8/LED/24-835/XD	8	T8	G13	FR	3500K	1200	82	220°	24.00	24.00	50K	045923119316	25
S11932	8T8/LED/24-840/XD	8	T8	G13	FR	4000K	1200	82	220°	24.00	24.00	50K	045923119323	25
S11933	8T8/LED/24-850/XD	8	T8	G13	FR	5000K	1200	82	220°	24.00	24.00	50K	045923119330	25
3FT														
S11934	11T8/LED/36-830/XD	11	T8	G13	FR	3000K	1600	82	220°	36.00	36.00	50K	045923119347	25
S11935	11T8/LED/36-835/XD	11	T8	G13	FR	3500K	1600	82	220°	36.00	36.00	50K	045923119354	25
S11936	11T8/LED/36-840/XD	11	T8	G13	FR	4000K	1600	82	220°	36.00	36.00	50K	045923119361	25
S11937	11T8/LED/36-850/XD	11	T8	G13	FR	5000K	1600	82	220°	36.00	36.00	50K	045923119378	25
4FT														
S11938	12T8/LED/48-830/XD	12	T8	G13	FR	3000K	1800	82	220°	48.00	48.00	50K	045923119385	25
S11939	12T8/LED/48-835/XD	12	T8	G13	FR	3500K	1800	82	220°	48.00	48.00	50K	045923119392	25
S11940	12T8/LED/48-840/XD	12	T8	G13	FR	4000K	1800	82	220°	48.00	48.00	50K	045923119408	25
S11941	12T8/LED/48-850/XD	12	T8	G13	FR	5000K	1800	82	220°	48.00	48.00	50K	045923119415	25

LED T8 Type C drivers

Item	Description	Lamps driven	V in	V out	Current in 120V	Current in 277V	Current out 120V, 277V	Freq. input HZ	Power factor 120V	Power factor 277V	Operating temp.	Storage temp.	UPC
S8012	LED driver/ 2', 3', 4'/Type C/T8	1, 2	120-277	24-48	300	130	290	50/60	0.95	0.93	-20° to 55°C	-40° to 85°C	045923090127
S8013	LED driver/ 2', 3', 4'/Type C/T8	3, 4	120-277	24-48	590	230	290	50/60	0.95	0.93	-20° to 55°C	-40° to 85°C	045923090134

Linear LED T5 Type C lamps

Item	Description	W	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
4FT T5														
S11942	23T5/LED/48-835/XD	23	T5	G5	FR	3500K	3400	82	220°	48.00	48.00	50K	045923119422	25
S11943	23T5/LED/48-840/XD	23	T5	G5	FR	4000K	3400	82	220°	48.00	48.00	50K	045923119439	25
S11944	23T5/LED/48-850/XD	23	T5	G5	FR	5000K	3400	82	220°	48.00	48.00	50K	045923119446	25

LED T5 Type C drivers

Item	Description	Lamps driven	V in	V out	Current in 120V	Current in 277V	Current out 120V, 277V	Freq. input HZ	Power factor 120V	Power factor 277V	Operating temp.	Storage temp.	UPC
S8014	LED driver/4'/ Type C/T5	1, 2	120-277	30-48	540	240	530	50/60	0.95	0.93	-20° to 55°C	-40° to 85°C	045923080142
S8015	LED driver/4'/ Type C/T5	3, 4	120-277	30-45	1020	450	530	50/60	0.98	0.96	-20° to 55°C	-40° to 85°C	045923080159

Product sheet SA2613

8″ AND 12″ T9 LED BALLAST BYPASS TYPE B CIRCLINE LAMPS

Features:

- No ballast or external driver required
- Over 40% energy savings vs. standard T9 systems
- Replaces 22W and 32W fluorescent Circlines
- 120–277V (direct wire)
- Damp location
- NSF certified
- c-ETL-us listed
- Long life—50,000 hours
- 5 Year warranty

8″– 11 Watt

12″– 16 Watt



Beam Angle: 135°

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S16500	FC8T9/LED/CIR/830/BP	11	120-277	T9	G10q	FR	3000K	1100	80	135°	8.00	-	50K	045923165009	12
S16501	FC8T9/LED/CIR/840/BP	11	120-277	T9	G10q	FR	4000K	1210	80	135°	8.00	-	50K	045923165016	12
S16502	FC8T9/LED/CIR/865/BP	11	120-277	T9	G10q	FR	6500K	1210	80	135°	8.00	-	50K	045923165023	12
S16503	FC12T9/LED/CIR/830/BP	16	120-277	T9	G10q	FR	3000K	1600	80	135°	12.00	-	50K	045923165030	12
S16504	FC12T9/LED/CIR/840/BP	16	120-277	T9	G10q	FR	4000K	1760	80	135°	12.00	-	50K	045923165047	12
S16505	FC12T9/LED/CIR/865/BP	16	120-277	T9	G10q	FR	6500K	1760	80	135°	12.00	-	50K	045923165054	12

Product sheet SA2461

TYPE B LED EMERGENCY BACK-UP FOR LED T8 AND T5 BALLAST BYPASS LAMPS

Features:

- 5 Watt or 10 Watt output power options
- Driver type: Constant wattage LED emergency
- Approximate lumens output 500lms~1000lms
- LED test switch and indicator light included
- Operating frequency: 50/60 Hz
- Max. current: 100mA@120v / 215mA@120v
- 1.8 Watt standby power
- 90 minute battery run time
- Output and over-power protection
- Recharge 24 hours max
- Lithium Ion battery
- 120-277V input
- Damp location
- 32°F-122°F (0°C-50°C) Operating temperature
- 5 Year warranty

Compatability:

- Satco 4′ T8 (S9720–S9723)
- Satco U-Bend (S9930–S9933)
- Satco 4′ T5 LED bypass lamps (S29717–S29719)
- Satco 2G11 PL-L (S9950-9951)
- Satco 2′ T8 (S29900-S29905)
- Satco 4′ T8 (S11924, S29913-S29916)
- Satco 3′ T8 (S29926-S29929)
- Satco 4′ T8 (S29904-S29907)

Wiring Instructions

Single Ended Wiring

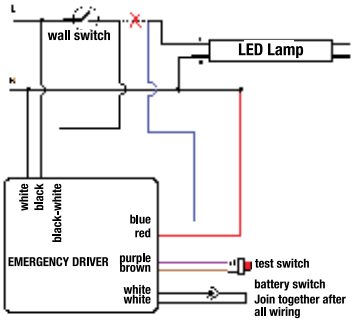

Double Ended Wiring

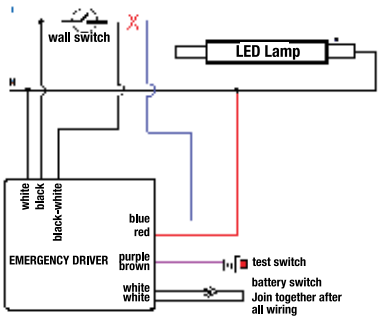

Dimensions

S8000

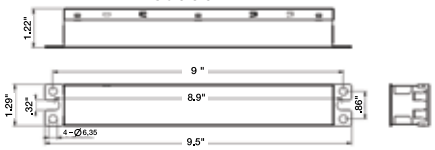

S8002

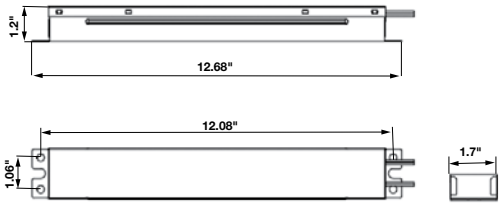

Item	Description	Watts	Voltage	M.O.L. (Inches)	Max. Current	Dimensions	Power Factor	UPC	Case
S8000	5W Emergency LED driver	5	120-277	9.5″	100mA@120V	1.3″W x 1.22″H x 9.5″L	70.35	045923080005	25
S8002	10W Emergency LED driver	10	120-277	12.68″	215mA@120V	1.7″W x 1.20″H x 12.68″L	70.35	045923080029	12

Meets UL924, CEC Title 20, FCC15 Part 15 Class A, Compliance.

Product sheet SA2363

LED T8 TYPE B SIGN LAMPS

Features:

- Over 40% savings vs. standard T8 systems
- 14 Length options from 18" to 10'
- Base rotates 90° for easy installation
- Full illumination for 2-way signs
- Wide, 360° beam spread
- CRI >83
- No ballast and no external driver required
- Direct wire 120-277V line voltage
- Damp location
- NSF Certified
- c-UL-us Classified
- Long life—50,000 hours
- 5 Year warranty

Wiring Diagram - AC 120-277V
Single Ended Wiring Required





Beam Angle: 360°

TYPE B | BALLAST BYPASS | DAMP LOCATION | CLASSIFIED c UL us | NSF

Item	Description	W	V	Bulb Shape	Base	Finish	CCT	Lm	CRI	Beam	MOL (in.)	Nominal (in.)	Life (hrs.)	UPC	Pack
S16412	7T8/LED/HO-SIGN/18-840/BP	7	120-277	T8	R17d	FR	4000K	950	83	360°	15.88	18.00	50K	045923164125	10
S16413	7T8/LED/HO-SIGN/18-865/BP	7	120-277	T8	R17d	FR	6500K	950	83	360°	15.88	18.00	50K	045923164132	10
S16400	9T8/LED/HO-SIGN/24-840/BP	9	120-277	T8	R17d	FR	4000K	1200	83	360°	21.88	24.00	50K	045923164002	10
S16401	9T8/LED/HO-SIGN/24-865/BP	9	120-277	T8	R17d	FR	6500K	1200	83	360°	21.88	24.00	50K	045923164019	10
S16414	11T8/LED/HO-SIGN/30-840/BP	11	120-277	T8	R17d	FR	4000K	1500	83	360°	27.88	30.00	50K	045923164149	10
S16415	11T8/LED/HO-SIGN/30-865/BP	11	120-277	T8	R17d	FR	6500K	1500	83	360°	27.88	30.00	50K	045923164156	10
S16402	12T8/LED/HO-SIGN/36-840/BP	12	120-277	T8	R17d	FR	4000K	1500	83	360°	33.88	36.00	50K	045923164026	10
S16403	12T8/LED/HO-SIGN/36-865/BP	12	120-277	T8	R17d	FR	6500K	1500	83	360°	33.88	36.00	50K	045923164033	10
S16416	15T8/LED/HO-SIGN/42-840/BP	15	120-277	T8	R17d	FR	4000K	2100	83	360°	40.00	42.00	50K	045923164163	10
S16417	15T8/LED/HO-SIGN/42-865/BP	15	120-277	T8	R17d	FR	6500K	2100	83	360°	40.00	42.00	50K	045923164170	10
S16404	18T8/LED/HO-SIGN/48-840/BP	18	120-277	T8	R17d	FR	4000K	2300	83	360°	46.00	48.00	50K	045923164040	10
S16405	18T8/LED/HO-SIGN/48-865/BP	18	120-277	T8	R17d	FR	6500K	2300	83	360°	46.00	48.00	50K	045923164057	10
S16406	24T8/LED/HO-SIGN/60-840/BP	24	120-277	T8	R17d	FR	4000K	3100	83	360°	57.88	60.00	50K	045923164064	10
S16407	24T8/LED/HO-SIGN/60-865/BP	24	120-277	T8	R17d	FR	6500K	3100	83	360°	57.88	60.00	50K	045923164071	10
S16418	26T8/LED/HO-SIGN/64-840/BP	26	120-277	T8	R17d	FR	4000K	3650	83	360°	61.88	64.00	50K	045923164187	10
S16419	26T8/LED/HO-SIGN/64-865/BP	26	120-277	T8	R17d	FR	6500K	3650	83	360°	61.88	64.00	50K	045923164194	10
S16408	30T8/LED/HO-SIGN/72-840/BP	30	120-277	T8	R17d	FR	4000K	4100	83	360°	69.88	72.00	50K	045923164088	10
S16409	30T8/LED/HO-SIGN/72-865/BP	30	120-277	T8	R17d	FR	6500K	4100	83	360°	69.88	72.00	50K	045923164095	10
S16420	32T8/LED/HO-SIGN/84-840/BP	32	120-277	T8	R17d	FR	4000K	4500	83	360°	81.88	84.00	50K	045923164200	10
S16421	32T8/LED/HO-SIGN/84-865/BP	32	120-277	T8	R17d	FR	6500K	4500	83	360°	81.88	84.00	50K	045923164217	10
S16410	36T8/LED/HO-SIGN/96-840/BP	36	120-277	T8	R17d	FR	4000K	5000	83	360°	93.88	96.00	50K	045923164101	10
S16411	36T8/LED/HO-SIGN/96-865/BP	36	120-277	T8	R17d	FR	6500K	5000	83	360°	93.88	96.00	50K	045923164118	10
S16422	42T8/LED/HO-SIGN/108-840/BP	42	120-277	T8	R17d	FR	4000K	5800	83	360°	105.00	108.00	50K	045923164224	10
S16423	42T8/LED/HO-SIGN/108-865/BP	42	120-277	T8	R17d	FR	6500K	5800	83	360°	105.00	108.00	50K	045923164231	10
S16424	45T8/LED/HO-SIGN/117-840/BP	45	120-277	T8	R17d	FR	4000K	6300	83	360°	114.00	117.00	50K	045923164248	10
S16425	45T8/LED/HO-SIGN/117-865/BP	45	120-277	T8	R17d	FR	6500K	6300	83	360°	114.00	117.00	50K	045923164255	10
S16426	48T8/LED/HO-SIGN/120-840/BP	48	120-277	T8	R17d	FR	4000K	6700	83	360°	117.00	120.00	50K	045923164262	10
S16427	48T8/LED/HO-SIGN/120-865/BP	48	120-277	T8	R17d	FR	6500K	6700	83	360°	117.00	120.00	50K	045923164279	10

4' and up - shipped in full cases only

Product sheet SA2494

CIRCULAR LED MODULE/FIXTURE RETROFIT KITS

Features:

- Upgrades most flush mount fixtures to efficient LED light
- Replaces 3 60W incandescent lamps, uses only 20 Watts
- Dimmable
- Dimensions: 8" W x 0.65" H
- Life—30,000 hours
- 3 Year warranty
- LED Circular light engine
- All necessary hardware for installation
- into a variety of flush mount fixtures
- Instructions and wiring diagrams
- A. (1) circular light engine
- B. (6) small wire nuts
- C. (6) medium wire nuts
- D. (1) lock-down retaining ring & washer
- E. (3) 1" #4 screws
- F. (4 x 2 each) assorted snap-in grommets (install grommets where supply wires enter fixture for power).
- G. Wiring Diagram

Easily converts most standard flush mount fixtures to LED

Item	Description	W	V	CCT	CRI	Lm	Life/ Hrs..	UPC	Pack
S9782	20W/LED/LIGHT ENGINE/27K/RK	20	120-277	2700K	90	1450	30K	045923097829	20/1
S9783	20W/LED/LIGHT ENGINE/30K/RK	20	120-277	3000K	90	1550	30K	045923097836	20/1
S9784	20W/LED/LIGHT ENGINE/40K/RK	20	120-277	4000K	90	1650	30K	045923097843	20/1

Product sheet SA2002

INDEX

Item	Page
80-929	105, 106, 108, 109, 112, 113, 114, 116
80-935	107
80-954	105, 112, 113, 117
80-955	117
80-956	105, 112, 113, 117, 105, 112, 113, 117
80-2626	139
80-2627	139
80-2628	139
80-2629	139
86-215	109
90-483	109
92-410	56, 106, 107, 108, 109, 114
93-5005	118
93-5006	118
93-5007	118
93-5034	118
93-5035	118
S8000	155
S8002	155
S8012	153
S8013	153
S8014	153
S8015	153
S8021	27
S8022	27
S8023	27
S8024	27
S8025	27
S8026	27
S8189	66
S8190	66
S8191	66
S8480	42
S8481	42
S8482	42
S8489	51
S8490	53
S8499	51
S8530	126
S8531	126
S8532	126
S8533	126
S8534	126
S8535	126
S8536	126
S8537	126
S8538	126
S8539	126
S8542	55
S8543	55
S8544	55
S8545	55
S8551	23
S8552	25
S8553	17
S8554	27
S8555	27
S8556	27
S8559	27
S8564	51
S8565	51
S8566	53
S8567	53
S8568	53
S8570	55
S8571	55
S8572	40
S8573	40
S8585	84
S8588	88
S8589	88
S8600	92
S8601	92
S8603	84, 89
S8604	89
S8605	89
S8609	35
S8610	35
S8611	35
S8612	35
S8616	35
S8635	87
S8636	87
S8637	87
S8638	87
S8639	87
S8640	87
S8641	87
S8642	87
S8643	87
S8644	87
S8676	88
S8677	88
S8678	88
S8679	88
S8688	93
S8689	93
S8735	56
S8736	56
S8737	56
S8738	56
S8745	128
S8746	128
S8747	128
S8748	128
S8749	128
S8755	128
S8756	128
S8757	128
S8758	128
S8759	128
S8778	56
S8779	56
S8791	56
S8792	56
S8839	21
S8840	25
S8841	27
S8849	18
S8851	27
S8890	149
S8891	149
S8892	149
S8893	149
S8914	42
S8915	42
S8916	42
S8920	42
S8928	114
S8929	114
S8930	114
S8950	63
S8951	63
S8952	63
S8953	63
S8980	114
S8987	114
S9021	71
S9022	71
S9029	71
S9030	40
S9031	40
S9032	40
S9033	40
S9058	71
S9064	40
S9065	40
S9067	40
S9068	40
S9150	39
S9151	39
S9152	39
S9153	39
S9154	39
S9155	39
S9156	39
S9157	39
S9158	39
S9159	39
S9160	39
S9161	39
S9162	39
S9163	39
S9164	39
S9165	39
S9166	39
S9167	39
S9168	39
S9169	39
S9170	39
S9171	39
S9172	39
S9173	39
S9174	39
S9175	39
S9176	39
S9177	39
S9200	63
S9201	63
S9202	63
S9203	63
S9280	84
S9281	84
S9282	84
S9283	84
S9316	55
S9317	55
S9318	55
S9319	55
S9380	88
S9381	88
S9382	88
S9383	88
S9384	88
S9385	88
S9386	84
S9387	84
S9388	84
S9389	84
S94899	106
S9490	87
S9491	87
S9492	87
S9493	87
S9494	87
S9495	87
S9496	87
S9497	87
S9498	87
S9499	87
S9542	92
S9543	92
S9544	92
S9545	92
S9546	92
S9547	92
S9550	84
S9551	84
S9552	87
S9553	87
S9564	18
S9565	19
S9566	19
S9567	23
S9569	23
S9571	25
S9575	27
S9576	27
S9577	29
S9578	29
S9579	29
S9580	27
S9581	27
S9582	27
S9583	29
S9584	29
S9585	29
S9588	29
S9590	41
S9591	41
S9592	41
S9593	42
S9594	42
S9595	42
S9598	101
S9599	101
S9616	87
S9620	69
S9621	69
S9622	69
S9623	69
S9624	69
S9627	69
S9630	69
S9631	69
S9632	69
S9633	69
S9634	71
S9635	71
S9636	71
S9637	71
S9638	71
S9639	71
S9640	71
S9641	71
S9678	106
S9698	70
S9703	42
S9704	42
S9707	42
S9708	42
S9729	101
S9753	108
S9754	108
S9755	108
S9779	108
S9782	157
S9783	157
S9784	157
S9807	27
S9827	18
S9828	18
S9854	125
S9855	125
S9856	125
S9857	125
S9862	125
S9863	125
S9864	125
S9865	125
S9868	21

Item	Page
S9869	25
S9870	17
S9872	27
S9873	29
S9892	27
S9893	18
S9895	27
S9950	129
S9951	129
S9952	129
S9953	129
S9960	21
S9961	21
S9962	25
S9963	25
S9964	23
S9965	25
S9966	31
S9967	31
S9968	31
S9969	31
S9970	31
S9971	31
S9980	91
S9981	91
S9982	91
S9983	91
S9986	29
S9987	29
S11210	93
S11211	93
S11212	93
S11213	93
S11214	93
S11215	93
S11216	93
S11217	93
S11218	62
S11219	62
S11220	64
S11221	64
S11222	64
S11223	64
S11224	62
S11225	62
S11250	7
S11251	7
S11252	7
S11253	7
S11254	7
S11255	7
S11256	7
S11257	7
S11258	7
S11259	8
S11260	8
S11261	8
S11262	8
S11263	9
S11264	9
S11265	9

Item	Page
S11266	11
S11267	11
S11268	11
S11269	11
S11270	11
S11271	7
S11272	10
S11273	10
S11274	7
S11275	7
S11276	7
S11277	7
S11278	7
S11279	8
S11280	8
S11300	37
S11301	37
S11302	37
S11303	37
S11304	37
S11305	37
S11306	37
S11307	37
S11310	50
S11311	50
S11320	41
S11321	41
S11329	54
S11330	54
S11331	54
S11332	54
S11333	69
S11334	87
S11335	87
S11336	87
S11340	87
S11341	87
S11342	87
S11343	87
S11355	14
S11356	14
S11357	15
S11358	15
S11359	15
S11360	15
S11361	15
S11362	15
S11363	17
S11364	17
S11365	18
S11366	18
S11367	19
S11368	19
S11369	21
S11370	21
S11371	21
S11372	21
S11373	21
S11374	23
S11375	23
S11376	25

Item	Page
S11377	25
S11378	27
S11379	27
S11380	27
S11381	27
S11382	27
S11383	21
S11384	21
S11385	21
S11400	47
S11401	47
S11402	41
S11403	41
S11404	41
S11405	41
S11406	42
S11407	42
S11408	42
S11409	42
S11410	47
S11411	47
S11412	47
S11413	47
S11414	45
S11415	45
S11416	45
S11417	45
S11418	53
S11419	53
S11420	71
S11421	49
S11422	53
S11423	53
S11424	53
S11425	53
S11427	49
S11428	49
S11430	44
S11431	44
S11432	44
S11433	44
S11434	45
S11435	45
S11437	51
S11438	51
S11440	65
S11441	65
S11442	65
S12436	16
S12437	16
S12438	16
S12439	16
S12440	16
S12441	16
S12442	16
S12443	16
S11540	67
S11541	67
S11542	67
S11543	67
S11550	124

Item	Page
S11551	124
S11552	124
S11553	124
S11554	124
S11640	99
S11641	99
S11740	131
S11741	131
S11742	131
S11743	131
S11800	95
S11801	95
S11820	95
S11821	95
S11822	95
S11824	95
S11825	95
S11832	97
S11833	97
S11834	97
S11835	97
S11836	97
S11837	97
S11900	143
S11901	143
S11902	143
S11903	143
S11904	143
S11905	143
S11906	143
S11907	143
S11908	143
S11909	143
S11910	137
S11911	137
S11912	137
S11913	137
S11914	137
S11915	137
S11916	137
S11917	137
S11918	151
S11919	151
S11920	136
S11921	136
S11922	136
S11923	136
S11926	140
S11927	140
S11928	151
S11929	151
S11930	153
S11931	153
S11932	153
S11933	153
S11934	153
S11935	153
S11936	153
S11937	153
S11938	153
S11939	153

Item	Page
S11940	153
S11941	153
S11942	153
S11943	153
S11944	153
S11950	144
S11951	144
S11952	144
S11953	139
S11954	139
S11955	139
S11956	139
S11957	140
S11958	140
S11959	140
S11960	133
S11961	133
S11962	133
S11963	133
S11964	141
S11965	141
S11966	141
S11967	141
S11970	147
S11971	147
S11972	147
S11973	147
S11974	150
S11975	150
S11976	150
S11977	150
S11980	135
S11981	135
S11982	135
S11983	135
S11984	135
S11985	135
S11986	135
S11987	135
S11988	135
S11989	135
S11990	135
S11991	135
S11992	135
S11993	135
S11994	135
S11995	135
S11996	135
S11997	135
S11998	135
S11999	135
S12100	17
S12101	17
S12102	17
S12103	17
S12104	17
S12105	17
S12106	18
S12107	18
S12108	18
S12109	18

Item	Page
S12110	18
S12111	19
S12112	19
S12113	19
S12114	27
S12115	21
S12116	21
S12117	21
S12118	21
S12244	85
S12245	85
S12246	85
S12247	85
S12400	13
S12401	13
S12402	13
S12403	13
S12404	13
S12405	13
S12406	13
S12407	13
S12408	14
S12409	14
S12410	14
S12411	14
S12412	14
S12413	14
S12414	14
S12415	14
S12416	14
S12417	14
S12418	14
S12419	14
S12420	14
S12421	14
S12422	15
S12423	15
S12424	15
S12425	15
S12426	15
S12427	15
S12428	15
S12429	15
S12430	15
S12431	15
S12432	15
S12433	15
S12434	15
S12435	15
S13100	59
S13101	59
S13102	59
S13103	59
S13104	59
S13105	59
S13106	59
S13107	59
S13108	59
S13109	59
S13110	59
S13111	59

Item	Page
S13112	116
S13113	116
S13114	116
S13115	116
S13118	110
S13119	110
S13120	112
S13121	112
S13122	112
S13123	111
S13124	111
S13127	112
S13130	103
S13131	103
S13132	103
S13133	103
S13134	103
S13135	103
S13136	103
S13140	105
S13141	105
S13142	105
S13143	105
S13144	105
S13145	105
S13150	115
S13151	115
S13152	115
S13153	115
S13154	115
S13155	115
S14984	61
S14985	61
S14986	61
S14987	61
S14988	61
S14989	61
S14990	61
S16400	156
S16401	156
S16402	156
S16403	156
S16404	156
S16405	156
S16406	156
S16407	156
S16408	156
S16409	156
S16410	156
S16411	156
S16412	156
S16413	156
S16414	156
S16415	156
S16416	156
S16417	156
S16418	156
S16419	156
S16420	156
S16421	156
S16422	156

Item	Page
S16423	156
S16424	156
S16425	156
S16426	156
S16427	156
S16500	154
S16501	154
S16502	154
S16503	154
S16504	154
S16505	154
S18400	123
S18401	123
S18402	123
S18403	123
S18404	123
S18450	148
S18451	148
S18452	148
S18453	148
S21323	50
S21324	50
S21325	50
S21326	52
S21327	52
S21328	52
S21400	127
S21401	127
S21402	127
S21403	127
S21404	127
S21405	127
S21406	127
S21407	127
S21700	35
S21701	35
S21702	35
S21703	35
S21704	35
S21705	35
S21706	35
S21707	35
S21708	21
S21709	23
S21710	35
S21711	35
S21712	16
S21713	16
S21714	16
S21720	35
S21721	35
S21722	35
S21723	35
S21724	35
S21725	35
S21726	35
S21727	35
S21728	35
S21729	21
S21730	35
S21731	35

Item	Page
S21732	35
S21733	35
S21734	16
S21735	35
S21736	35
S21737	18
S21738	18
S21739	18
S21740	18
S21741	89
S21742	89
S21743	89
S21800	60
S21801	60
S21802	60
S21803	60
S21804	60
S21805	60
S21806	60
S21807	60
S21924	133
S21925	140
S22210	79
S22211	79
S22212	79
S22213	79
S22214	79
S22215	79
S22216	79
S22217	79
S22218	79
S22219	79
S22240	83
S22241	83
S22242	83
S22243	83
S22250	83
S22251	83
S22252	83
S22253	83
S22430	33
S22431	33
S22432	33
S22433	33
S22703	37
S22707	37
S22712	37
S22713	37
S23403	37
S23407	37
S23412	37
S23413	37
S25011	43
S25012	43
S28483	50
S28484	50
S28485	50
S28486	52
S28487	52
S28488	52
S28491	69

Item	Page
S28492	69
S28493	71
S28547	69
S28557	41
S28558	41
S28560	45
S28561	45
S28562	45
S28563	45
S28574	63
S28575	63
S28576	63
S28577	69
S28578	69
S28579	69
S28580	71
S28593	41
S28594	41
S28595	63
S28596	69
S28597	71
S28602	92
S28613	35
S28614	35
S28617	63
S28618	63
S28619	69
S28650	50
S28652	52
S28653	52
S28680	92
S28681	92
S28682	92
S28683	92
S28684	93
S28685	93
S28686	93
S28687	93
S28690	142
S28691	142
S28692	142
S28693	142
S28694	142
S28695	142
S28696	142
S28697	142
S28698	142
S28710	107
S28711	107
S28712	107
S28713	107
S28714	107
S28715	107
S28716	107
S28717	107
S28725	123
S28726	123
S28727	123
S28728	123
S28729	123
S28765	50

Item	Page
S28766	50
S28767	50
S28768	50
S28769	51
S28770	51
S28785	52
S28786	52
S28787	52
S28788	52
S28789	53
S28790	53
S28931	113
S28932	113
S28937	113
S28938	113
S28976	121
S29004	90
S29005	90
S29189	73
S29312	100
S29313	100
S29314	100
S29315	100
S29400	75
S29401	75
S29402	75
S29403	75
S29404	75
S29405	75
S29406	75
S29407	75
S29408	75
S29409	75
S29410	76
S29411	76
S29412	76
S29413	76
S29414	76
S29415	76
S29416	76
S29417	76
S29418	76
S29419	76
S29420	76
S29421	76
S29422	76
S29423	76
S29424	76
S29425	76
S29426	76
S29427	76
S29428	76
S29429	76
S29430	76
S29431	76
S29432	76
S29433	76
S29434	76
S29435	76
S29436	76
S29437	76

Item	Page
S29438	76
S29439	76
S29440	77
S29441	77
S29442	77
S29443	77
S29444	77
S29445	77
S29446	77
S29447	77
S29448	77
S29449	77
S29450	77
S29451	77
S29452	77
S29453	77
S29454	77
S29455	77
S29456	77
S29457	77
S29480	81
S29481	81
S29482	81
S29483	81
S29484	81
S29547	92
S29548	92
S29549	92
S29558	45
S29563	18
S29589	45
S29614	69
S29615	71
S29618	63
S29619	63
S29625	69
S29626	69
S29628	70
S29629	46
S29697	92
S29699	46
S29760	83
S29761	83
S29764	83
S29765	83
S29804	50
S29805	52
S29810	50
S29811	50
S29812	50
S29813	50
S29814	50
S29815	52
S29816	52
S29817	52
S29818	52
S29819	52
S29830	41
S29831	41
S29832	41
S29833	41

Item	Page
S29834	41
S29835	42
S29836	42
S29837	42
S29838	42
S29839	42
S29840	42
S29841	42
S29842	42
S29843	42
S29844	42
S29850	125
S29851	125
S29852	125
S29853	125
S29858	125
S29859	125
S29860	125
S29861	125
S29866	21
S29867	25
S29871	17
S29877	21
S29878	18
S29890	21
S29891	25
S29910	141
S29911	141
S29912	141
S29917	140
S29918	140
S29919	140
S29920	21
S29921	25
S29922	21
S29923	25
S29924	141
S29925	141
S29942	141
S29988	17
S38939	119
S38946	119
S38975	119
S39188	73
S39390	106
S39391	106
S39392	106
S39393	106
S39394	106
S39395	106
S39396	106
S39397	106
S39596	45
S39597	45
S39670	106
S39671	106
S39672	106
S39673	106
S39674	106
S39675	106
S39676	106

Item	Page
S39677	106
S39679	109
S39717	142
S39718	142
S39719	142
S39720	142
S39738	106
S39739	106
S39750	109
S39751	109
S39752	109
S39768	109
S39769	109
S39798	109
S39799	109
S39879	14
S39900	133
S39901	133
S39902	133
S39903	133
S39904	133
S39905	133
S39906	133
S39907	133
S39913	133
S39914	133
S39915	133
S39916	133
S39926	133
S39927	133
S39928	133
S39929	133
S49934	131
S49935	131
S49936	131
S49937	131
S49946	131
S49947	131
S49948	131
S49949	131
S49975	131
S49976	131
S49977	131
S49978	131
S49990	131
S49991	131
S49992	131
S49993	131

NOTES

NOTES

SATCO® | NUVO®

To learn more about Satco | Nuvo,
visit satco.com or contact 800-437-2826.

DISTRIBUTION CENTERS

New York (Headquarters)
110 Heartland Blvd., Brentwood, NY 11717
Tel. 631-243-2022, Fax: 631-243-2027

Texas
2000 Valwood Parkway, Farmers Branch, TX 75234
Tel. 972-247-2437, Fax: 972-247-5408

Florida
900 N.W. 159th Drive, Miami, FL 33109
Tel. 305-624-2044, Fax: 305-623-0286

California
31288 San Benito Street, Hayward, CA 94544
Tel. 510-487-4822, Fax: 510-487-8955

Washington
4710 116th S.W., Mukilteo, WA 98275
Tel. 425-789-3300, Fax: 425-789-3310

Puerto Rico
Campeche Street. 23 Julio
N. Matos Industrial Park, Carolina, PR 00984
Tel. 787-757-3510, Fax: 787-757-3540

Products inventoried in Canada & Mexico:
Contact: internationalsales@satco.com
631-243-2022 Ext. 315

© 2021 Satco Products, Inc.
All rights reserved. 12/21 SA2000-4
$10.00