

# LumeLIT FLOOD LIGHTS

# PROJECT:

## FEATURES

Lumen Output	3900 to 9100 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	No
CCT	5000K
IP Rating	IP65 Wet Location
Warranty	5 Years

## APPLICATIONS

Premium outdoor luminaire suitable for building exteriors, billboards, accent lighting, and pedestrian walkways.

## CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. IP65 Wet Location rated for dust-tight, water jets: IEC 60529.

## ELECTRICAL

Input voltages 120-277V. Operating temperatures -40°F to 113°F (-40°C to 45°C).

## MOUNTING

Adjustable Knuckle Mount included.

## OPTICS

Anti-UV Clear Polycarbonate Lens.

## LISTINGS

DLC Premium listed. ETL certified to meet US and Canadian standards. FCC, CE and RoHS compliant.

## WARRANTY

5 year exclusive limited warranty. View complete product warranty information



## SPECIFICATIONS

### ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 30W, 50W, 70W

Power Factor: >0.9

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

### LIGHTING DATA

Lumens: 3900 (30W), 6500 (50W), 9100 (70W)

Lumens Per Watt: 130 lm/W

Color Correlated Temperature (CCT): 5000K

Dimmable: No

Color Rendering Index (CRI): >70

L70: 75000 hours

### CORRELATED COLOR TEMPERATURE (CCT)

5000K



## ORDERING INFORMATION

Model	Wattage	CCT	Voltage	Lumens	Color	Item#	Price.
LumeLIT/FLOOD/30W/5K	30W	5000	120/277	3900	Bronze	L0022	38.50
LumeLIT/FLOOD/50W/5K	50W	5000	120/277	6500	Bronze	L0023	56.00
LumeLIT/FLOOD/70W/5K	70W	5000	120/277	9100	Bronze	L0024	86.50




**Lighting & Electrical Supply**



## PHYSICAL DIMENSIONS


### 30W Models

7.20"L x 7.00"W x 2.00"H

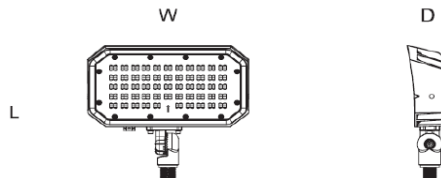


### 50W Models

8.40"L x 9.00"W x 2.30"H

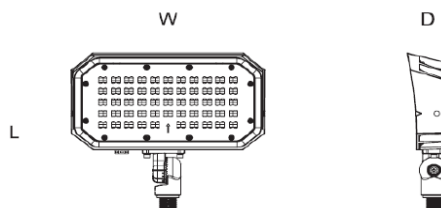

### 70W Models

11.70"L x 12.20"W x 3.15"H

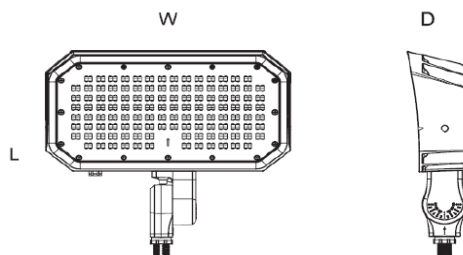

Lighting & Electrical Supply

