


WIRING DEVICES

WIRING DEVICES L1 - L32



SURGE SUPPRESSION L23 - L26

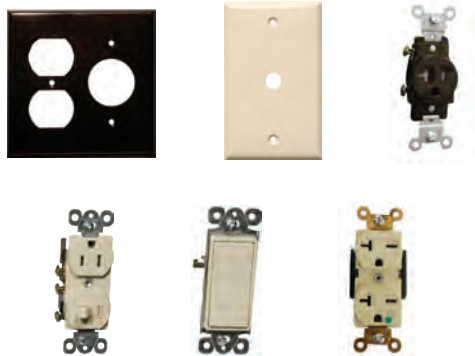

CORD ENDS - PLUGS & RECEPTICLES L27 - L29



LIGHTING & FANSPEED L31 - L34



VOICE & DATA L35 - L46



CHIMES, TRANSFORMERS & PUSHBUTTONS L47 - L50



Toggle Switches



WIRING DEVICES

Toggle Switches



FIG 1



FIG 2

- Toggle Switch
- Back & Side Wired
- Made of GE Lexan, Zinc Plated Steel Mounting Strap
- Accepts #12 or #14 Stranded or Solid Copper (Push-In #14 Solid Only)
- Washer Type Break Off Plaster Ears
- Large head Captive Combination Screws for quick wiring
- Easy-Access Green Hex-Head Ground Screw
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F



FIG 3



FIG 4

AMPS	VOLTAGE	COLOR	RESIDENTIAL GRADE	COMMERCIAL GRADE	FIGURE	BOX QTY	CASE QTY
SINGLE POLE							
15	120/277	IVORY	82010		1	10	200
		WHITE	82011		1	10	200
		BROWN	82012		1	10	200
		ALMOND	82013		1	10	200
20	120/277	IVORY		82020	2	10	200
		WHITE		82021	2	10	200
SINGLE POLE - NO MOUNTING EARS							
15	120	BLACK	82048		3	10	200
SINGLE POLE - (LIT WHEN SWITCH IS OFF)							
15	120/277	CLEAR	82045		4	10	200
3-WAY							
15	120/277	IVORY	82030		1	10	200
		WHITE	82031		1	10	200
		BROWN	82032		1	10	200
		ALMOND	82033		1	10	200
20	120/277	IVORY		82025	2	10	200
		WHITE		82026	2	10	200
3-WAY- (LIT WHEN SWITCH IS OFF)							
15	120/277	CLEAR	82046		4		
4-WAY							
15	120/277	IVORY	82040		1	10	200
		WHITE	82041		1	10	200

Toggle Switches - Combinations



FIG 1



FIG 2



FIG 3

AMPS	VOLTAGE	COLOR	RESIDENTIAL GRADE	FIGURE	BOX QTY	CASE QTY
SINGLE POLE - DOUBLE SWITCH						
15	120	IVORY	82090	1	10	200
		WHITE	82091	1	10	200
SINGLE POLE - SWITCH & RECEPTACLE						
15	120	IVORY	82175	2	10	200
		WHITE	82176	2	10	200
SINGLE POLE - SWITCH & PILOT LIGHT						
15	120	IVORY	82095	3	10	200
		WHITE	82096	3	10	200

Decorative Switches



- Smooth Quiet Paddle Action
- Back & Side Wired
- Made of GE Lexan
- Accepts #12 or #14 Stranded or Solid Copper (Push-In #14 Solid Only)
- Washer Type Break Off Plaster Ears
- Large head Captive Tri-Combo Screws for quick wiring
- Easy-Access Green Hex-Head Ground Screw
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F
- Wallplate Not Included

AMPS	VOLTAGE	COLOR	RESIDENTIAL GRADE	COMMERCIAL GRADE	BOX QTY	CASE QTY
SINGLE POLE						
15	120/277	IVORY	82050		10	200
		WHITE	82051		10	200
		BROWN	82052		10	200
		ALMOND	82053		10	200
20	120/277	IVORY		82080	10	200
		WHITE		82081	10	200
SINGLE POLE - LIGHTED (WHEN SWITCH OFF)						
15	120/277	IVORY	82285		10	200
		WHITE	82286		10	200
3-WAY						
15	120/277	IVORY	82060		10	200
		WHITE	82061		10	200
		BROWN	82062		10	200
		ALMOND	82063		10	200
3-WAY LIGHTED						
15	120/277	IVORY	82290		10	200
		WHITE	82291		10	200
4-WAY						
15	120/277	IVORY	82070		10	200
		WHITE	82071		10	200
MOMENTARY CONTACT (GARBAGE DISPOSAL)						
15	120/277 SPDT OFF-(ON)	IVORY	82100		10	200
		WHITE	82101		10	200



WIRING DEVICES

Decorative Switches

Decorative Switches - Combinations



- Elegant design provides multiple controls in a single gang wall box
- All devices have ground terminals
- Fits most standard wall boxes
- Double Rocker Switch & Switch/Receptacle are Back & Side Wire
- Triple Rocker Switch is Back Wire Only
- Wallplate Not Included



FIG 1



FIG 2



FIG 3

AMPS	VOLTAGE	COLOR	COMMERCIAL GRADE	FIGURE	BOX QTY	CASE QTY
TRIPLE ROCKER SWITCH - 15 AMP PUSH-IN ONLY - 120/277 VAC						
15	120/277	IVORY	81970	1	10	200
		WHITE	81971	1	10	200
		ALMOND	81973	1	10	200
DOUBLE ROCKER SWITCH - 15 AMP SIDE WIRED ONLY - 120/277 VAC						
15	120/277	IVORY	81980	2	10	200
		WHITE	81981	2	10	200
SINGLE POLE SWITCH/RECEPTACLE - 15 AMP 120V SWITCH - 15 AMP 125V RECEPTACLE						
15	120	IVORY	81990	3	10	200
		WHITE	81991	3	10	200
		ALMOND	81993	3	10	200



Duplex Receptacles



RESIDENTIAL



COMMERCIAL



INDUSTRIAL



INDUSTRIAL SINGLE

- Duplex Receptacle
- Green Hex-Head Ground Screw
- 2 Pole 3 Wire
- UL 94V-2 Flame Rating
- Resi & Industrial Grade - Back & Side Wire
- Commercial Grade - Side Wire Only
- Temperature Rating: -40°F to 167°F
- Made of GE Lexan, Steel Mounting Strap
- Accepts #12 or #14 Stranded or Solid CU (Push-In #14 Solid Only)
- Washer Type Break Off Plaster Ears
- Large Head Captive Tri-Combination Screws

AMPS	VOLTAGE	COLOR	RESIDENTIAL GRADE	COMMERCIAL GRADE	INDUSTRIAL GRADE	COMMERCIAL GRADE SINGLE RECEPTACLE	BOX QTY	CASE QTY
15 AMP 125V 5-15R								
15	125	IVORY	82120	82140	82195	82135	10	200
		WHITE	82121	82141	82196	82136	10	200
		BROWN	82122	82142			10	200
		ALMOND	82123				10	200
15 AMP 250V 6-15R								
15	250	IVORY			82200	82240	10	200
		WHITE			82201	82241	10	200
20 AMP 125V 5-20R								
20	125	IVORY		82150	82130	82155	10	200
		WHITE		82151	82131	82156	10	200
		BROWN		82152			10	200
20 AMP 250V 6-20R								
20	250	IVORY			82205	82245	10	200
		WHITE			82206	82246	10	200

Hospital Grade/Isolated Ground Duplex Receptacles



HOSPITAL GRADE



ISOLATED GROUND

- 2 Pole 3 Wire
- Back & Side Wired
- Made of GE Lexan
- Steel Mounting Strap
- 4 Corner Latches Secure Face
- Washer Type Break Off Plaster Ears
- Brass Strap Self Grounding Clip
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F
- Accepts #10 to #14 Stranded or Solid CU
- Touch Proof Side Barriers
- Large Head Captive Tri-Combo Screws

AMPS	VOLTAGE	COLOR	ISOLATED GROUND	HOSPITAL GRADE ISOLATED GROUND	HOSPITAL GRADE	BOX QTY	CASE QTY
15 AMP 125V 5-15R							
15	125	IVORY	82225		82250	10	200
		WHITE		82226	82251	10	200
		ORANGE	82228			10	200
		RED			82253	10	200
15 AMP 250V 6-15R							
15	250	IVORY		82230	82255	10	200
		WHITE		82231	82256	10	200
		ORANGE		82233		10	200
		RED			82258	10	200
20 AMP 125V 5-20R							
20	125	IVORY	82160		82170	10	200
		WHITE	82161		82171	10	200
		ORANGE	82164			10	200
		RED			82173	10	200
20 AMP 250V 6-20R							
20	250	IVORY		82235	82260	10	200
		WHITE		82236	82261	10	200
		ORANGE	82238			10	200
		RED			82263	10	200

Tamper Resistant Duplex Receptacles

- 2 Pole 3 Wire
- Back & Side Wired
- Made of GE Lexan, Steel Mounting Strap
- Washer Type Break Off Plaster Ears
- Large Head Captive Tri-Combination Screws
- Built-in Protective Shutter Mechanism Designed to Prevent Insertion of Foreign Objects
- Clear Visible "TR" marking on Face
- Green Hex-Head Ground Screw
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F
- Accepts #12 or #14 Stranded or Solid CU (Push-In #14 Solid Only)



AMPS	VOLTAGE	COLOR	RESIDENTIAL GRADE	COMMERCIAL GRADE	COMMERCIAL GRADE SINGLE RECEPTACLE	BOX QTY	CASE QTY
15 AMP 125V 5-15R							
15	125	IVORY	81950	82435	82510	10	200
		WHITE	81951	82436	82511	10	200
		ALMOND	81953			10	200
20 AMP 125V 5-20R							
20	125	IVORY			82455	10	200
		WHITE		82441	82456	10	200
		BROWN			82457	10	200

Tamper Resistant Isolated Ground Duplex Receptacles

- 2 Pole 3 Wire
- Back & Side Wired
- Made of GE Lexan
- Steel Mounting Strap
- 4 Corner Latches Secure Face
- Washer Type Break Off Plaster Ears
- Brass Strap Self Grounding Clip
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F
- Accepts #10 to #14 Stranded or Solid CU
- Touch Proof Side Barriers
- Large Head Captive Tri-Combo Screws



AMPS	VOLTAGE	COLOR	ISOLATED GROUND	BOX QTY	CASE QTY
15 AMP 125V 5-15R					
15	125	IVORY	82445	10	200
		WHITE	82446	10	200
		ORANGE	82449	10	200
20 AMP 125V 5-20R					
20	125	IVORY	82450	10	200
		WHITE	82451	10	200
		ORANGE	82454	10	200

Tamper & Weather Resistant Duplex Receptacles

Complies with 2011 NEC Article 406.9 that states that all receptacles installed in wet & damp locations must be weather resistant. "WR" designations provide visual identification. Weather Resistant Receptacles offer protection from rain, snow, ice, moisture, & humidity when properly installed in an approved weather protective or while-in-use cover. Combine WR receptacles with any of our While-in-Use Covers.

- 2 Pole 3 Wire
- Back & Side Wired
- Made of GE Lexan, Steel Mounting Strap
- Washer Type Break Off Plaster Ears
- Large Head Captive Tri-Combination Screws
- Green Hex-Head Ground Screw
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F
- Accepts #12 or #14 Stranded or Solid CU (Push-In #14 Solid Only)



AMPS	VOLTAGE	COLOR	COMMERCIAL GRADE	BOX QTY	CASE QTY
15 AMP 125V 5-15R					
15	125	IVORY	82500	10	200
		WHITE	82501	10	200
		BROWN	82502	10	200
20 AMP 125V 5-20R					
20	125	IVORY	82505	10	200
		WHITE	82506	10	200
		BROWN	82507	10	200



Decorative Receptacles



- 2 Pole 3 Wire
- Back & Side Wired
- Made of GE Lexan. Steel Mounting Strap
- Washer Type Break Off Plaster Ears
- Large Head Captive Tri-Combination Screws
- Green Hex-Head Ground Screw
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F
- Accepts #12 or #14 Stranded or Solid CU
- (Push-In #14 Solid Only)

AMPS	VOLTAGE	COLOR	RESIDENTIAL GRADE	FIGURE	BOX QTY	CASE QTY
15 AMP 125V 5-15R						
15	125	IVORY	82015	1	10	200
		WHITE	82016	1	10	200
		BROWN	82017	1	10	200
		ALMOND	82018	1	10	200

Industrial Grade Decorative Receptacles



- 2 Pole 3 Wire 5-15R
- Back & Side Wired
- Made of GE Lexan. Steel Mounting Strap
- Washer Type Break Off Plaster Ears
- Large Head Captive Tri-Combination Screws
- Dual Ground Self Ground Clip/Screw
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F
- Accepts #12 or #14 Stranded or Solid CU
- (Push-In #14 Solid Only)

AMPS	VOLTAGE	COLOR	INDUSTRIAL GRADE	BOX QTY	CASE QTY
15 AMP 125V 5-15R					
15	125	IVORY	82210	10	200
		WHITE	82211	10	200
15 AMP 250V 6-15R					
15	250	IVORY	82215	10	200
		WHITE	82216	10	200
20 AMP 125V 5-20R					
20	125	IVORY	82180	10	200
		WHITE	82181	10	200
20 AMP 250V 6-20R					
20	250	IVORY	82220	10	200
		WHITE	82221	10	200

Isolated Ground Decorative Receptacles



- Protect Sensitive Electronic Equipment and Eliminate Electromagnetic interference by Providing Separate Path to Ground
- Back and Side Wired
- 2 Pole 3 Wire 5-15R
- Unique Screw Terminal Guards Provide Fast, Easy Installation
- Isolated Ground
- Washer Type Break Off Plaster Ears
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F

AMPS	VOLTAGE	COLOR	ISOLATED GROUND	BOX QTY	CASE QTY
15 AMP 125V 5-15R					
15	125	IVORY	81910	10	200
		WHITE	81911	10	200
		ORANGE	81914	10	200
15 AMP 250V 6-15R					
15	250	IVORY	81920	10	200
		WHITE	81921	10	200
		ORANGE	81924	10	200
20 AMP 125V 5-20R					
20	125	IVORY	81915	10	200
		WHITE	81916	10	200
		ORANGE	81919	10	200
20 AMP 250V 6-20R					
20	250	IVORY	81925	10	200
		WHITE	81926	10	200
		ORANGE	81929	10	200

Decorative Tamper Resistant Duplex Receptacles



- Decorative Receptacle - Tamper Resistant
- Built-In Protective Shutter Mechanism Prevents Insertion of Foreign Objects - Clearly Visible TR Marking On Face
- Back & Side Wired
- Made of GE Lexan, Zinc Plated Steel Mounting Strap
- Accepts #12 or #14 Stranded or Solid Copper (Push-In #14 Solid Only)
- Washer Type Break Off Plaster Ears
- Large head Captive Combination Screws for quick wiring
- Easy-Access Green Hex-Head Ground Screw
- UL 94V-2 Flame Rating
- Temperature Rating: -40°F to 167°F



FIG 1



FIG 2



FIG 3



FIG 4

AMPS	VOLTAGE	COLOR	RESIDENTIAL GRADE	COMMERCIAL GRADE	ISOLATED GROUND	FIGURE	BOX QTY	CASE QTY
15 AMP 125V 5-15R								
15	125	IVORY	81960	82465		1	10	200
		WHITE	81961	82466		1	10	200
		ALMOND	81963			1	10	200
20 AMP 125V 5-20R								
20	125	IVORY		82470		2	10	200
		WHITE		82471		2	10	200
15 AMP 125V 5-15R								
15	125	IVORY			82475	3	10	200
		WHITE			82476	3	10	200
		ORANGE			82479	3	10	200
20 AMP 125V 5-20R								
20	125	IVORY			82480	4	10	200
		WHITE			82481	4	10	200
		ORANGE			82484	4	10	200

USB Chargers & Tamper Resistant Decorative Receptacles

- Decorative Receptacle with USB Charging Ports Tamper Resistant
- 4 Amps - 5 VDC
- Compatible with USB 1.1/2.0/3.0 Device
- Built-In Protective Shutter Mechanism prevents Insertion Of Foreign Objects
- Clearly Visible TR Marking On Face
- Accepts #12 or #14 Stranded or Solid Copper (Push-In #10 to #14 Solid Only)
- Washer Type Break Off Plaster Ears
- Large head Captive Combination Screws
- Easy-Access Green Hex-Head Ground Screw

- Zinc Plated Steel Mounting Strap
- Back & Side Wired
- Made of GE Lexan
- UL 94 V2 Flame Rating
- Temperature Rating: -4°F to 140°F
- ETL listed



**RAPID CHARGE
4 AMP 5V DC**



FIG 1



FIG 2

AMPS	VOLTAGE	COLOR	CAT. NO.	FIGURE	BOX QTY	CASE QTY
2 USB PORTS W/ DECORATIVE RECEPTACLE						
15	125	IVORY	82370	1	10	40
		WHITE	82371	1	10	40
20	125	IVORY	82375	1	10	40
		WHITE	82376	1	10	40

WIRING DEVICES

Tamper Resistant Receptacles




Flush Dryer Receptacles



- Dryer Receptacle
- Single Gang
- 30 Amp
- 4 Wire
- 125/250 Volt

CAT. NO.	COLOR	BOX QTY	CASE QTY
82521	WHITE	10	200
82522	BLACK	10	200

Flush Stove/Range Receptacle

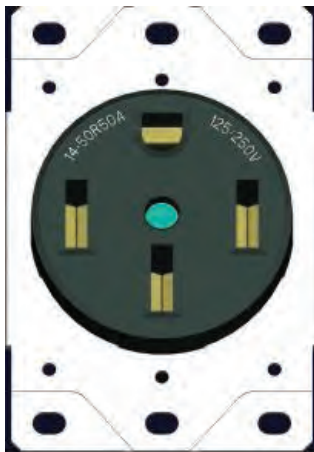

- Range Receptacle
- Single Gang
- 50 Amp
- 4 Wire
- 125/250 Volt

CAT. NO.	COLOR	BOX QTY	CASE QTY
82526	BLACK	10	200

Switch Guard



- Protect toggle switch handles and other devices from accidental actuation or damage
- NEMA Standard Mounting Hole Pattern

CAT. NO.	BOX QTY	CASE QTY
83489	10	100

T-8 Low Profile Lampholder

- Medium Bi-Pin Fluorescent
- Slide-On with Captive Nut
- Push Wire Terminations
- Non-Shunted
- 660W
- 600V

CAT. NO.	BAG QTY
45225	10



T-8 Tall Profile Lampholder

- Medium Bi-Pin Fluorescent
- Slide-On with Captive Nut
- Push Wire Terminations
- Non-Shunted
- 660W
- 600V

CAT. NO.	BAG QTY
45226	10



Single Pin Lampholders



- Slimline Fluorescent Pedestal Type Lamp Fa8
- Slide-On Base
- Push Wire Terminations
- 660W
- 1000V

CAT. NO.	TYPE	BAG QTY
45232	PLUNGER	10
45233	FIXED	10



High Output Lampholders



- High Output Fluorescent Pedestal Type Lamp R17d
- Slide-On Base
- Push Wire Terminations
- 660W
- 1000V

CAT. NO.	TYPE	BAG QTY
45234	PLUNGER	10
45235	FIXED	10



Snap-In Cabinet Devices

- 3-Wire Grounding Polarized Receptacle
- 15A; 125V
- 18 Awg 221°F(105°C) 6" Leads
- Flammability Rating: UL 94V-2
- Operating Temperature: -13°F to 140°F (-25°C to 60°C)
- Single gang

CAT. NO.	COLOR	BOX QTY	CASE QTY
45251	WHITE	25	200
45252	BLACK	25	200



WIRING DEVICES

Lampholders



Wallplates

Wallplate Dimensions:

Standard Plates:

- 1 Gang - 2-1/2" x 4-1/2"
- 2 Gang - 4-1/2" x 4-1/2"
- 3 Gang - 4-1/2" x 6-3/8"
- 4 Gang - 4-1/2" x 8-3/8"
- 5 Gang - 4-1/2" x 10"
- 6 Gang - 4-1/2" x 11-3/4"

Mid-Size Plates:


- 3-1/8" x 4-7/8"
- 4-7/8" x 5"
- 4-7/8" x 6-3/4"
- 4-7/8" x 8-5/8"
- 4-7/8" x 10-3/8"
- 4-7/8" x 12-1/4"

Princess Mid-Size:

- 3-1/2" x 5"
- 4-9/16" x 5"

Over-Size:

- 3-1/2" x 5-1/2"

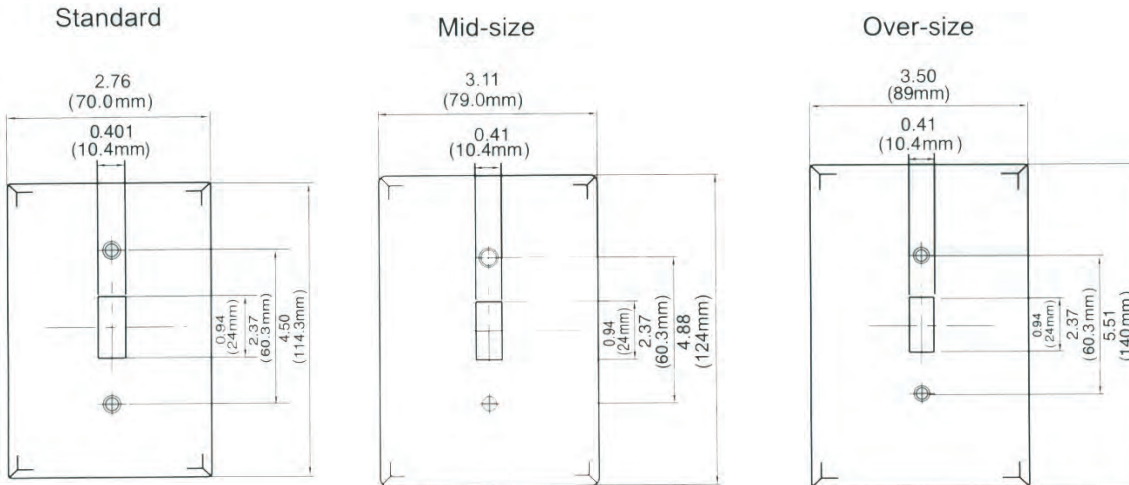

Wiring Devices - NEMA Configuration Chart

STRAIGHT BLADE STYLE NEMA CONFIGURATIONS

VOLTAGE	NEMA #	15 AMP	20 AMP	30 AMP
		RECEPTACLE/PLUG	RECEPTACLE/PLUG	RECEPTACLE/PLUG
2-POLE 3-WIRE GROUNDING	125V	5		
	250V	6		

LOCKING STYLE NEMA CONFIGURATIONS

VOLTAGE	NEMA #	15 AMP	20 AMP	30 AMP
		RECEPTACLE/PLUG	RECEPTACLE/PLUG	RECEPTACLE/PLUG
2-POLE 3-WIRE GROUNDING	125V	L5		
	250V	L6		
2-POLE 3-WIRE GROUNDING	125/250VAC	L14		
	30/250 VAC	L15		

1 Gang Toggle Switch Wallplates



LEXAN	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY	81010	81710		81810	25	200
WHITE	81011	81711		81811	25	200
BROWN	81012	81712		81812	25	200

PAINTED STEEL	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY	83013			83723	25	200
WHITE	83012				25	200

430 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83010	83681	83620		25	100

304 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83811	83872		83882	25	100



2 Gang Toggle Switch Wallplates



LEXAN	STANDARD	MID-SIZE	PRINCESS MID-SIZE	BOX QTY	CASE QTY
IVORY	81020	81750		25	200
WHITE	81021	81751		25	200
BROWN	81022	81752		25	200
ALMOND	81023	81753		25	200

PAINTED STEEL	STANDARD	MID-SIZE	PRINCESS MID-SIZE	BOX QTY	CASE QTY
IVORY	83023		83663	25	100
WHITE	83022		83662	25	100

430 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83020		83660	10	100

304 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83812			10	100



3 Gang Toggle Switch Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81030	81755	10	200
WHITE	81031	81756	10	200
BROWN	81032		10	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83033		10	100

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83030		10	100



WIRING DEVICES

Wallplates

L10



4 Gang Toggle Switch Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81040	81758	10	200
WHITE	81041	81759	10	200
ALMOND	81043		10	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83043		10	100
WHITE	83042		10	100

5 Gang Toggle Switch Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81050	10	200
WHITE	81051	10	200
BROWN	81052	10	200

6 Gang Toggle Switch Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81060	10	200
WHITE	81061	10	200
BROWN	81062	10	200
ALMOND	81063	10	200

1 Gang Decorative/GFCI Wallplates



LEXAN	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY	81110	81720			25	200
WHITE	81111	81721		81821	25	200
ALMOND	81113	81723			25	200

PAINTED STEEL	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY			83643	83743	25	200
WHITE	83112				25	200

430 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83110		83640	83740	25	100

304 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83821				25	100



2 Gang Decorative/GFCI Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81120	81770	25	200
WHITE	81121	81771	25	200
BROWN	81122	81772	25	200
ALMOND		81773	25	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83123		25	100
WHITE	83122		25	100

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83120		10	100

304 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83822		10	100



3 Gang Decorative/GFCI Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY		81775	10	200
WHITE	81131	81776	10	200
BROWN	81132		10	200
ALMOND	81133		10	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83133		10	100

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83130		10	100




WIRING DEVICES

Wallplates



4 Gang Decorative/GFCI Wallplates

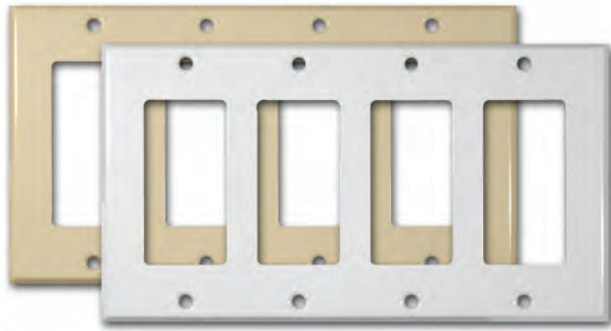

LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81140	81778	10	200
WHITE	81141	81779	10	200
BROWN	81142		10	200
ALMOND	81143		10	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83143		10	100
WHITE	83142		10	100

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83140		10	100

5 Gang Decorative/GFCI Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81150	81780	10	200
WHITE	81151	81781	10	200
BROWN	81152		10	200

6 Gang Decorative/GFCI Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY		81785	10	200
WHITE	81161	81786	10	200
BROWN	81162		10	200
ALMOND	81163		10	200

1 Gang Duplex Receptacle Wallplates



LEXAN	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY	81410	81730		81830	25	200
WHITE	81411	81731		81831	25	200
BROWN	81412	81732		81832	25	200
ALMOND	81413	81733		81833	25	200

PAINTED STEEL	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY	83213				25	100
WHITE	83212				25	100

430 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83210	83682	83630	83730	25	100

304 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83831	83873			25	100



2 Gang Duplex Receptacle Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81420	81760	25	200
WHITE	81421	81761	25	200
BROWN		81762	25	200
ALMOND	81423	81763	25	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83223		25	100
WHITE	83222		25	100

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83220		10	100




3 Gang Duplex Receptacle Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY		81765	10	200
WHITE	81431	81766	10	200
BROWN			10	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83233		10	100
WHITE	83232		10	100

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83230		10	100

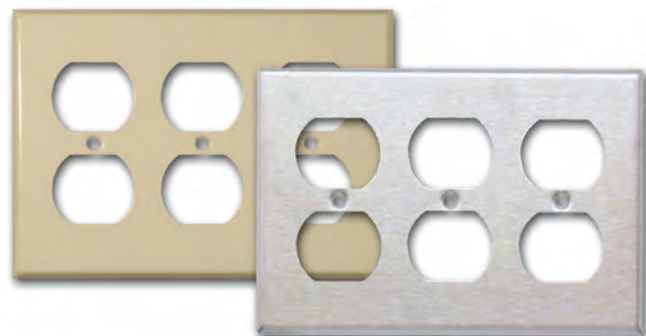

WIRING DEVICES Wallplates



4 Gang Duplex Receptacle Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81440	10	200
WHITE	81441	10	200
BROWN	81442	10	200

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
IVORY	83243	10	100
WHITE	83242	10	100

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83240	10	100

1 Gang Blank Wallplates



LEXAN	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY	81510	81740		81840	25	200
WHITE	81511	81741		81841	25	200
BROWN	81512	81742		81842	25	200
ALMOND	81513				25	200

PAINTED STEEL	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
IVORY	83313		83613	83713	25	100
WHITE	83312		83612		25	100

430 STAINLESS	STANDARD	MID-SIZE	PRINCESS MID-SIZE	OVER-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83310	83680	83610	83710	25	100

2 Gang Blank Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81520	81745	25	200
WHITE	81521	81746	25	200
BROWN	81522		25	200
ALMOND	81523		25	200

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83320		10	100


3 Gang Blank Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81530	10	200
WHITE	81531	10	200

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
WHITE	83332	10	100

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83330	10	100

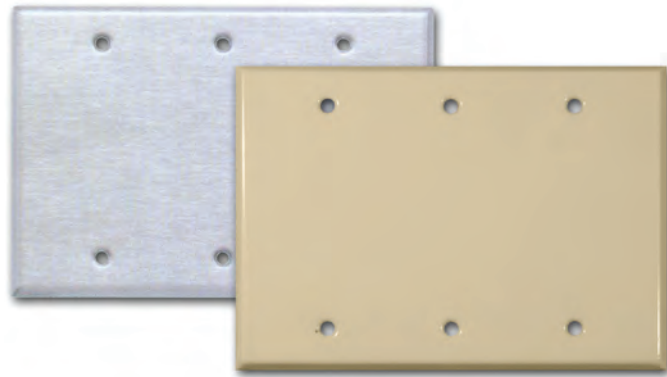


4 Gang Blank Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81540	10	200
WHITE	81541	10	200

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
WHITE	83342	10	100

430 STAINLESS	430	BOX QTY	CASE QTY
STAINLESS STEEL	83340	10	100

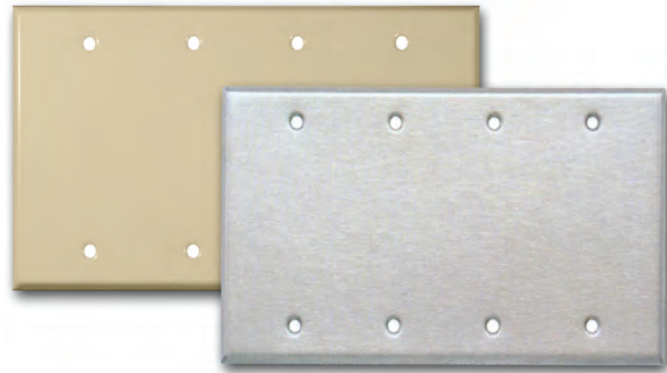

1 Gang Single Receptacle Wallplates



LEXAN	STANDARD	PRINCESS MID-SIZE	OVER-SIZE	HOLE DIA	BOX QTY	CASE QTY
IVORY	81610			1.406	25	200
WHITE	81611			1.406	25	200
BROWN	81612			1.406	25	200
ALMOND	81613			1.406	25	200

PAINTED STEEL	STANDARD	PRINCESS MID-SIZE	OVER-SIZE	HOLE DIA	BOX QTY	CASE QTY
IVORY	83448			1.620	25	200
WHITE	83447			1.620	25	100
IVORY	83453	83653	83753	1.406	25	200

430 STAINLESS	STANDARD	PRINCESS MID-SIZE	OVER-SIZE	HOLE DIA	BOX QTY	CASE QTY
STAINLESS STEEL	83445			1.620	25	100
STAINLESS STEEL	83450	83650	83750	1.406	25	100



2 Gang 2 Single Receptacle Wallplates



LEXAN	STANDARD	HOLE DIA	BOX QTY	CASE QTY
IVORY	81620	1.406	25	200
WHITE	81621	1.406	25	200
BROWN	81622	1.406	25	200
ALMOND	81623	1.406	25	200

PAINTED STEEL	STANDARD	HOLE DIA	BOX QTY	CASE QTY
IVORY	83513	1.406	25	100
WHITE	83512	1.406	25	100

1 Gang Cable Wallplates



LEXAN	STANDARD	OVER-SIZE	HOLE DIA.	BOX QTY	CASE QTY
IVORY	81630		.406	25	200
WHITE	81631		.406	25	200
BROWN	81632		.406	25	200
ALMOND	81633		.406	25	200
IVORY	81670		.625	25	200
ALMOND	81673		.625	25	200

PAINTED STEEL	STANDARD	OVER-SIZE	HOLE DIA.	BOX QTY	CASE QTY
IVORY	83458		.406	25	200
WHITE	83457		.406	25	200
IVORY	83463	83763	.625	25	200
IVORY	83468		.437	25	200
WHITE	83467		.437	25	200

430 STAINLESS	STANDARD	OVER-SIZE	HOLE DIA.	BOX QTY	CASE QTY
STAINLESS STEEL	83455		.406	25	200
STAINLESS STEEL	83460	83760	.625	25	200

2 Gang Cable Wallplates



PAINTED STEEL	STANDARD	HOLE DIA.	BOX QTY	CASE QTY
IVORY	83473	.625	25	100
WHITE	83472	.625	25	100
IVORY	83478	.406	25	100
WHITE	83477	.406	25	100

430 STAINLESS	STANDARD	HOLE DIA.	BOX QTY	CASE QTY
STAINLESS STEEL	83470	.625	25	100
STAINLESS STEEL	83475	.406	25	100

2 Gang 1 Toggle, 1 Blank Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81210	25	200
WHITE	81211	25	200
BROWN	81212	25	200

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
IVORY	83413	25	100

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83410	25	100



2 Gang 1 GFCI, 1 Blank Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81220	25	200
WHITE	81221	25	200

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83560	10	100



2 Gang 1 Blank, 1 Duplex Wallplates



LEXAN	STANDARD	INNER QTY	OUTER QTY
IVORY	81230	25	200
WHITE	81231	25	200
BROWN	81232	25	200
ALMOND	81233	25	200

PAINTED STEEL	STANDARD	INNER QTY	OUTER QTY
IVORY	83543	25	100
WHITE	83542	25	100

430 STAINLESS	STANDARD	INNER QTY	OUTER QTY
STAINLESS STEEL	83540	10	100





2 Gang Toggle, Decorative/GFCI Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81240	81790	25	200
WHITE	81241	81791	25	200
ALMOND	81243		25	200

PAINTED STEEL	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	83433		25	100

430 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83430		25	100

304 STAINLESS	STANDARD	MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83860		10	100

2 Gang Duplex, Toggle Wallplates



LEXAN	STANDARD	MID-SIZE	BOX QTY	CASE QTY
IVORY	81290	81795	25	200
WHITE	81291	81796	25	200
BROWN	81292		25	200
ALMOND	81293		25	200

PAINTED STEEL	STANDARD	PRINCESS MID-SIZE	BOX QTY	CASE QTY
IVORY	83423	83673	25	100
WHITE	83422	83672	25	100

430 STAINLESS	STANDARD	PRINCESS MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83420		25	100

304 STAINLESS	STANDARD	PRINCESS MID-SIZE	BOX QTY	CASE QTY
STAINLESS STEEL	83859		10	100

2 Gang Decorative, Duplex Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81250	25	200
WHITE	81251	25	200
ALMOND	81253	25	200

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
IVORY	83443	25	100
WHITE	83442	25	100

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83440	25	100

304 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83861	10	100

2 Gang Duplex, Single Receptacle Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81685	25	200
WHITE	81686	25	200
ALMOND	81688	25	200

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
IVORY	83553	25	100

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83550	25	100



1406" DIAMETER

3 Gang 2 Toggle, 1 GFCI Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81310	10	200
WHITE	81311	10	200
BROWN	81312	10	200
ALMOND	81313	10	200

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
IVORY	83583	10	100
WHITE	83582	10	100

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83580	10	100

304 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83864	10	100



3 Gang 1 Duplex, 2 Toggle Wallplates



LEXAN	STANDARD	BOX QTY	CASE QTY
IVORY	81260	10	200
WHITE	81261	10	200
BROWN	81262	10	200
ALMOND	81263	10	200





1 Gang Phone, Cable Wallplates



PAINTED STEEL	STANDARD	HOLE DIA.	BOX QTY	CASE QTY
IVORY	83523	.374" & .177"	25	200
WHITE	83522	.374" & .177"	25	200


1 Gang Range/Dryer Wallplates



2.125"
DIAMETER

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83480	25	200

2 Gang Range/Dryer Wallplates

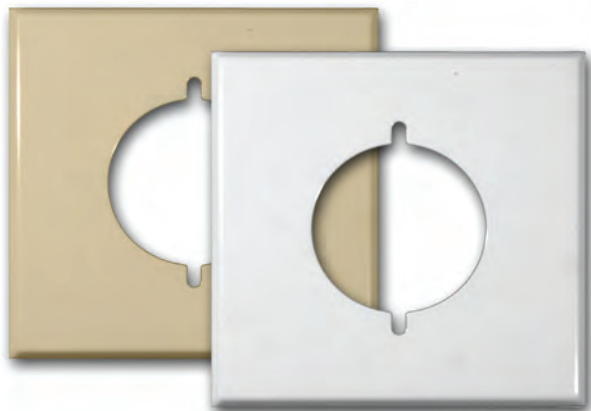

2.125" DIAMETER

PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
WHITE	83487	10	100

430 STAINLESS	STANDARD	BOX QTY	CASE QTY
STAINLESS STEEL	83485	10	100

2 Gang Power Outlet Wallplates



PAINTED STEEL	STANDARD	BOX QTY	CASE QTY
IVORY	83508	25	100




2.125" DIAMETER

Decorative Screwless Wallplates



- Screwless Snap-In Design gives smooth finish without recessed lines
- Decorative compatible two piece kit allows easy retrofit to any decorative installation
- Virtually unbreakable thermoplastic

CAT. NO.	GANGS	COLOR	BOX QTY	CASE QTY
80900	1	IVORY	25	200
80901	1	WHITE	25	200
80903	1	ALMOND	25	200
80905	2	IVORY	25	200
80906	2	WHITE	25	200
80908	2	ALMOND	25	200
80910	3	IVORY	10	100
80911	3	WHITE	10	100
80913	3	ALMOND	10	100
80915	4	IVORY	10	100
80916	4	WHITE	10	100
80918	4	ALMOND	10	100
80920	5	IVORY	10	100
80921	5	WHITE	10	100
80923	5	ALMOND	10	100

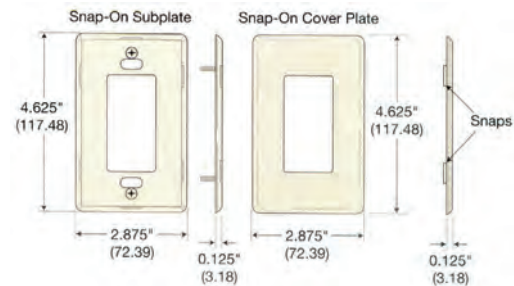


Emergency Metal Switch Plates



- Red with silk screened white letters

CAT. NO.	TYPE	SIZE	BOX QTY	CASE QTY
83490	OIL	UTILITY	25	100
83491	OIL	1 GANG	25	100
83492	OIL	4" RAISED	10	100
83495	GAS	UTILITY	25	100
83496	GAS	1 GANG	25	100
83497	GAS	4" RAISED	10	100
83500	EMERGENCY	UTILITY	25	100
83501	EMERGENCY	1 GANG	25	100
83502	EMERGENCY	4" RAISED	10	100

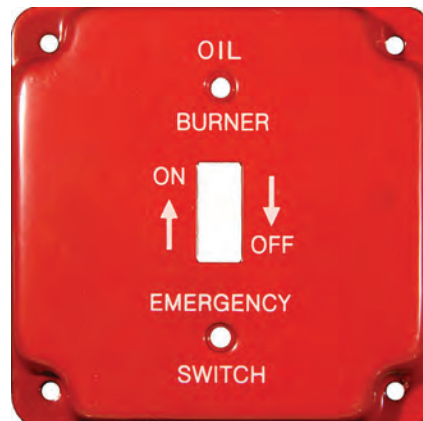



3 Outlet Surge Protector



- Safely converts a standard outlet to 3 Outlets with Surge Protection
- Tamper Resistant rotating safety covers for all outlets
- 15A; 120V; 60 Hz
- Surge Dissipation: 900 Joules - Ground & Surge Protect Indicator Light
- Clamping Voltage: 700V L-N

- Max Surge Voltage: 6,000V
- Max Current Spike: 15,000A
- 1-Line Surge Protection
- EMI/RFI Filtering
- UL 498A & UL 1449

CAT. NO.	JOULES	BOX QTY
89040	900	48

6 Outlet Surge Protector



- Safely converts a standard wall outlet into a 6 Outlet Surge Protector
- Tamper Resistant rotating safety covers for all outlets
- 15A; 120V; 60 Hz
- Surge Dissipation: 1200 Joules - Ground & Surge Protect Indicator Light
- Clamping Voltage: 500V L-N, N-G, L-G

- Max Surge Voltage: 6,000V
- Max Current Spike: 60,000A
- 3-Line Surge Protection
- EMI/RFI Filtering
- UL 498A & UL 1449

CAT. NO.	JOULES	BOX QTY
89010	1200	24

6 Outlet Power Adaptor



- Converts on 3-prong polarized outlet into 6 grounded outlets

- 15A/125V/1875W
- UL 498A

CAT NO.	BOX QTY
89405	48

4 Outlet Surge Strip with Two 2.1A USB Charging Ports




- 4 Outlet Surge Protector & 2 USB Charging Ports 2.1A
- Provides Surge Protection for USB and Electrical devices
- Tamper Resistant rotating safety covers for all outlets
- 15A; 120V; 60 Hz, Lit Reset/Off switch over current protection

- Surge Dissipation: 800 Joules - Surge Protection Indicator Light
- Clamping Voltage: 500V L-N, N-G, L-G
- Max Surge Voltage: 6,000V, Max Current Spike: 30,000A
- 3-Line Surge Protection
- EMI/RFI Filtering
- UL 1363 & UL 1449

CAT. NO.	JOULES	CORD LENGTH	BOX QTY
89020	800	6FT	12

6 Outlet Power Strip

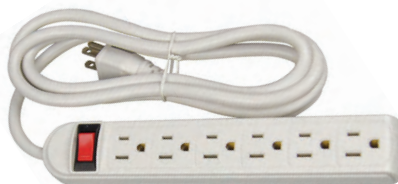

- Indoor Power Strip with 6 outlets
- Slim design for space saving
- On/off switch with built in circuit breaker
- Plastic housing

- Mounting key holes on back for easy hanging
- 15A; 125V; 60Hz 1875W, SJT 14/3
- UL 1363

CAT. NO.	CORD LENGTH	BOX QTY
89022	6 FT	36

6 Outlet Surge Strip

- Indoor Power Strip with 6 outlets
- Slim design for space saving
- Unlit on/off switch with built in circuit breaker
- Plastic enclosure
- Mounting key holes on back for easy hanging
- Clamping Voltage: 700V L-N
- 125V; 15A; 60Hz; 1875W, SJT 14/3
- UL 1363 & UL 1449

CAT. NO.	JOULES	CORD LENGTH	BOX QTY
89032	245	6 FT	36
89034	245	12 FT	24



6 Outlet Surge Strip with Phone Line Protection

- Indoor Surge Strip with 6 outlets & Phone/Fax/Modem protection
- EMI/Noise filter
- LED Surge Indicator light
- Full 3 Line Surge Protection
- Plastic housing
- Clamping Voltage: 500V L-N, N-G, L-G
- Max Surge Volts: 6,000V, Max Current Spike: 30,000A
- 15A; 120V; 60 Hz
- UL 1363 & UL 1449

CAT. NO.	JOULES	CORD LENGTH	BOX QTY
89071	800	6 FT	24



6 Outlet Metal Surge Strip with 2 Transformer Outlets

- Horizontal Grounded Outlets
- Heavy Duty Metal Housing
- Tamper Resistant Slide Safety Covers for all outlets
- Lighted On/Off Circuit Breaker Switch
- Mounting key holes on back for easy hanging
- SJT 14/3 Cord Type, 15A; 120V; 60 Hz
- Surge Dissipation: 800 Joules
- Clamping Voltage: 500V L-N, N-G, L-G
- Max Surge Voltage: 6,000V, Max Current Spike: 30,000A
- EMI/RFI Filtering
- 3-Line Surge Protection
- Surge Protection Indicator Light
- Power Shutdown Feature
- UL 1363 & UL 1449

CAT. NO.	JOULES	CORD LENGTH	BOX QTY
89060	800	6FT	20



8 Outlet Surge Strip with Phone Line & CATV Protection

- 2 Power Adapter spaces to allow more flexibility
- Tamper Resistant Slide Safety Covers for all Outlets
- Lighted On/Off Circuit Breaker
- Mounting key holes on back for easy hanging
- Sliding Cable Organizer Bracket
- 15A 125V 60Hz
- Surge Dissipation: 2100 Joules - Ground & Surge Protect Indicator
- Clamping Voltage: 400V L-N, N-G, L-G
- Max Surge Voltage: 6,000V Max Current Spike: 75,000A
- EMI/RFI Filtering
- 3-Line Surge Protection
- MCOV 127 VAC. In 3KA
- Power Shutdown Feature
- UL 1363 & UL 1449

CAT. NO.	JOULES	CORD LENGTH	FUNCTION	BOX QTY
89091	2100	6FT	PHONE/CATV	12

ULTIMATE PROTECTION



Heavy Duty Metal Power Bar Surge Strip



MOUNTING KEY HOLES ON BACK FOR EASY HANGING

- 12 Outlet 48" long power surge strip
- Durable construction for Lab, Work-Shop & Office Applications etc.
- Brushed Aluminum Housing
- Lighted On/Off Circuit Breaker Switch
- LED indicator light for function status
- 15A 120V, 1875W 60Hz
- Surge Dissipation: 450 Joules
- Clamping Voltage: 500V L-N, N-G, L-G
- Max Surge Voltage: 6,000V
- Max Current Spike: 22,500A
- 6Ft SJT 14/3 Power Cord
- EMI/RFI Filtering
- 3-Line Surge Protection
- UL 1363 & UL 1449

CAT. NO.	JOULES	CORD LENGTH	BOX QTY
89100	450	6 FT	4


Pigtail Socket



- Pigtail Type Medium Base Weather-proof Lampholder
- With Two #14, 6 inch Leads, One Black and One White
- Includes a rubber gasket that fits securely around the bulb neck to ensure water does not enter the socket
- Single Circuit, 660 Watt; 50 Volt, Black, Right handed

CAT. NO.	SIZE	BOX QTY	CASE QTY
45260	#14 STRANDED 6" LEADS	25	250

3 Outlet Power Adaptor



- 15A/125V
- Converts any grounded outlet to 3 grounded outlets
- Unbreakable Hard Rubber Material

CAT NO.	BOX QTY
89412	50

Commercial/Industrial Surge Suppression - 3 Phase



NEW

- I_{max} 100kA 8/20 μs
- UL1449 4th Edition Type I Listed Common mode suppression
- Thermal fused metal oxide varistor (MOV) suppression within series Gas-Tube technology for maximum surge protection and zero leakage
- Light emitting diode's (LED) visual protection status indicator
- Real time diagnostics by LED per phase and audible alarm
- Maximum surge current capacity of 100,000 surge Amps
- Indoor/Outdoor IP66 NEMA 6 rated enclosure NEMA 6 exceeds NEMA 4 or 4X In 20 kA; SCCR 200 kA
- Meets requirements of UL 96A Lighting Protection Master Label
- Available in a variety of voltages ranging from 120 to 600 VAC
- Hardwired connection #12 AWG 36" leads
- Audible Alarm protection status indicator
- Product is approved to be installed inside of circuit panel



CAT. NO.	COLOR	BOX QTY	CASE QTY
89I20	WHITE	10	200
89I22	BLACK	10	200

Residential Whole House Surge Suppression - Single Phase



NEW

- I_{max} 100kA 8/20 μs
- UL1449 4th Edition Type I Listed Common mode suppression
- Thermal fused metal oxide varistor (MOV) suppression with in series Gas-Tube technology for maximum surge protection and zero leakage
- Light emitting diode's (LED) visual protection status indicator
- Real time diagnostics by LED per phase and audible alarm
- Maximum surge current capacity of 100,000 surge Amps
- Indoor/Outdoor IP66 NEMA 6 rated enclosure NEMA 6 exceeds NEMA 4 or 4X
- In 20 kA; SCCR 200 kA
- Meets requirements of UL 96A Lighting Protection Master Label
- Hardwired connection #12 AWG 36" leads
- Audible Alarm protection status indicator
- Product is approved to be installed inside of circuit panel



CAT. NO.	COLOR	BOX QTY	CASE QTY
89I28	WHITE	10	200

Sub-Panel Surge Suppressor

NEW



- Installs at electrical panel, electrical disconnect to protect Pumps, Motors, HVAC Condensers & Incoming Utility Power for Residential & Light Commercial Applications
- Hardwire Parallel Connection
- Unlimited (Parallel Installation) Continuous Current
- Response Time: <1 nSec component level
- Automatic Reset to Protect against Multiple Surge Events
- MCOV: 130 VAC (L - G), 260 VAC (L - L)
- AC protection Modes: 500V (L - G) & 900V (L - L)
- Short Circuit Current Rating: 10,000A
- Operating Frequency: 0 - 400 Hz
- Protection Type: SPD Type 2
- Service Voltage: 120/240 VAC (2w+G) Single Phase
- WeatherProof High Impact ABS Non-Metallic Housing
- Housing size: 3" x 2.25" x .75"
- Indicator light for surge protection, grounding and power status
- cULus Listed, UL 1449, 3rd Edition; ANSI/IEEE C62.11



CAT. NO.	INDICATOR LIGHT	MAX SURGE CURRENT	MAX ENERGY DISSIPATION	CASE QTY
89I14	YES	75,000 AMPS	940 JOULES	48

Twist Lock Plugs and Receptacles - 2 Pole 3 Wire



- Rugged Nylon/Polycarbonate Construction resists impact, abrasion, sunlight & chemicals
- Grooved Housing for enhanced grip
- All contacts are solid one-piece brass for superior conductivity and reduced heat rise
- Heavy duty power contacts set in deep pockets to resist damage
- Heavy duty brass combo head terminal screws
- Clear terminal chamber allows for visual inspection of terminals
- Cord strain relief and rubber grommet to seal from environment
- Includes grounding screw

2 POLE 3 WIRE



FIG 1



FIG 2

CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
89729	MALE	1	15	125	L5-15P	50	200
89730	FEMALE	2	15	125	L5-15C	50	200
89731	MALE	1	15	250	L6-15P	50	200
89732	FEMALE	2	15	250	L6-15C	50	200
NEW 20443	MALE	1	15	277	L7-15P	50	200
NEW 20445	FEMALE	2	15	277	L7-15C	50	200
89733	MALE	1	20	125	L5-20P	10	100
89734	FEMALE	2	20	125	L5-20C	10	100
89746	MALE	1	20	250	L6-20P	10	100
89747	FEMALE	2	20	250	L6-20C	10	100
NEW 20447	MALE	1	20	277	L7-20P	10	100
NEW 20448	FEMALE	2	20	277	L7-20C	10	100
NEW 20453	MALE	1	20	480	L8-20P	10	100
NEW 20454	FEMALE	2	20	480	L8-20C	10	100
89748	MALE	1	30	125	L5-30P	10	100
89749	FEMALE	2	30	125	L5-30C	10	100
89750	MALE	1	30	250	L6-30P	10	100
89751	FEMALE	2	30	250	L6-30C	10	100
NEW 20450	MALE	1	30	277	L7-30P	10	100
NEW 20451	FEMALE	2	30	277	L7-30C	10	100

90° Twist Lock Plugs - 2 Pole 3 Wire



CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
20426	MALE	1	15	125	L5-15P	20	200
20436	MALE	1	15	250	L6-15P	20	200
20444	MALE	1	15	277	L7-15P	20	200

Recessed Twist Lock Plugs & Receptacles 2P/3W



CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
20427	MALE	1	15	125	L5-15P	50	200
20429	FEMALE	2	15	125	L5-15C	50	200
20437	MALE	1	15	250	L6-15P	50	200
20438	FEMALE	2	15	250	L6-15C	50	200
20431	MALE	1	20	125	L5-20P	10	100
20433	FEMALE	2	20	125	L5-20C	10	100
20439	MALE	1	20	250	L6-20P	10	100
20440	FEMALE	2	20	250	L6-20C	10	100
20434	MALE	1	30	125	L5-30P	10	100
20435	FEMALE	2	30	125	L5-30C	10	100
20441	MALE	1	30	250	L6-30P	10	100
20442	FEMALE	2	30	250	L6-30C	10	100

Twist Lock Plugs and Receptacles - 3 Pole 4 Wire

CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
3 POLE 4 WIRE							
89752	MALE	3	20	125/250	L14-20P	10	100
89754	FEMALE	4	20	125/250	L14-20C	10	100
89755	MALE	3	20	250	L15-20P	10	100
89757	FEMALE	4	20	250	L15-20C	10	100
NEW 20464	MALE	3	20	480	L16-20P	10	100
NEW 20465	FEMALE	4	20	480	L16-20C	10	100
89756	MALE	3	30	125/250	L14-30P	10	100
89758	FEMALE	4	30	125/250	L14-30C	10	100
89760	MALE	3	30	250	L15-30P	10	100
89761	FEMALE	4	30	250	L15-30C	10	100
NEW 20469	MALE	3	30	480	L16-30P	10	100
NEW 20470	FEMALE	4	30	480	L16-30C	10	100

3 POLE 4 WIRE



FIG 3

FIG 4

Recessed Twist Lock Plugs & Receptacles - 3 Pole 4 Wire

CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
3 POLE 4 WIRE							
20456	MALE	1	20	125-250	L14-20P	10	100
20457	FEMALE	2	20	125-250	L14-20C	10	100
20458	MALE	1	30	125-250	L14-30P	10	100
20459	FEMALE	2	30	125-250	L14-30C	10	100
20460	MALE	1	20	250	L15-20P	10	100
20461	FEMALE	2	20	250	L15-20C	10	100
20462	MALE	1	30	250	L15-30P	10	100
20463	FEMALE	2	30	250	L15-30C	10	100
20467	MALE	1	20	480	L16-20P	10	100
20468	FEMALE	2	20	480	L16-20C	10	100
20472	MALE	1	30	480	L16-30P	10	100
20473	FEMALE	2	30	480	L16-30C	10	100



NEW

Twist Lock Wall Mount Receptacles

- Rugged Phenolic Cover with PBT (Polybutylene Terephthalate) Base construction resists impact, sunlight, chemicals and rough use
- Contacts are solid one-piece brass for superior conductivity & reduced heat rise
- Heavy Duty Power Contacts set in deep pockets to resist damage
- Heavy Duty Brass Combo Head Terminal Screws, Flush Mount Design



2 POLE 3 WIRE

CAT. NO.	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
89736	15	125	L5-15R	50	200
89737	15	250	L6-15R	50	200
NEW 20446	15	277	L7-15R	50	200
89739	20	125	L5-20R	50	200
89738	20	250	L6-20R	50	200
NEW 20449	20	277	L7-20R	50	200
NEW 20455	20	480	L8-20	50	200
89740	30	125	L5-30R	50	200
89741	30	250	L6-30R	50	200
NEW 20452	30	277	L7-30R	50	200



3 POLE 4 WIRE

CAT. NO.	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
89742	20	125/250	L14-20R	50	200
89743	20	250	L15-20R	50	200
NEW 20466	20	480	L8-20R	50	200
89744	30	125/250	L14-30R	50	200
89745	30	250	L15-30R	50	200
NEW 20471	30	480	L8-20R	50	200



WIRING DEVICES Twist Lock Plugs & Receptacles

Hospital Grade Straight Blade Plugs



FIG 1

CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
20410	MALE	1	15	125	L5-15P	50	200

Lit Straight Blade Plugs



FIG 1

CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
20411	MALE	1	15	125	5-15P	50	200

Straight Blade Plugs and Receptacles




2 POLE 3 WIRE



FIG 1



FIG 2



- Rugged Nylon Construction resists impact, abrasion, sunlight & chemicals
- Grooved Housing for Enhanced Grip
- All contacts are solid one-piece brass for Superior Conductivity and Reduced Heat Rise
- Heavy duty contacts set in deep pockets to resist damage
- Heavy duty brass combo head terminal screws
- Clear terminal chamber allows for visual inspection of terminals
- Cord strain relief and rubber grommet to seal from environment
- Includes grounding screw

CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
89612	MALE	1	15	125	5-15P	50	200
89613	FEMALE	2	15	125	5-15C	50	200
89614	MALE	1	20	125	5-20P	50	200
89615	FEMALE	2	20	125	5-20C	50	200
89616	MALE	1	15	250	6-15P	50	200
89617	FEMALE	2	15	250	6-15C	50	200
89618	MALE	1	20	250	6-20P	50	200
89619	FEMALE	2	20	250	6-20C	50	200

Flanged Recessed Straight Blade Plugs and Receptacles



FIG 1



FIG 2


CAT. NO.	MALE/FEMALE	FIGURE	AMPS	VOLTS	NEMA#	BOX QTY	MASTER BOX QTY
20413	MALE	1	15	125	L5-15P	50	200
20415	FEMALE	2	15	125	L5-15R	50	200
20416	MALE	1	15	250	L6-15P	50	200
20417	FEMALE	2	15	250	L6-15R	50	200
20419	MALE	1	20	125	L5-20P	10	100
20421	FEMALE	2	20	125	L5-20R	10	100
20423	MALE	1	20	250	L6-20P	10	100
20425	FEMALE	2	20	250	L6-20R	10	100

Residential Floor Boxes




WIRING DEVICES
Floor Boxes

- Heavy duty Brass or Nickel Plated Brass covers
- Junction Box, duplex receptacle & rubber gasketed cover included
- Corrosion resistant hardware and water-tight gasket assure long life and reliability
- Good for tile and carpet applications
- Adjustable to make installs easy
- 1/2" Conduit Knockouts
- Fits manufacturer's 3-1/2" deep switch box
- Can accommodate data-communications inserts
- Boxes comply with NEMA WDI-1983
- Includes 15A 125V White TamperProof Receptacle
- UL 351B & UL 498 listed receptacles

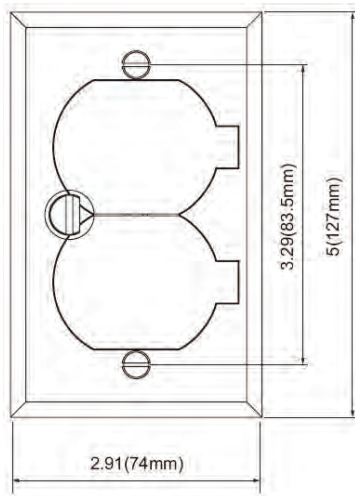

84000 - 84001

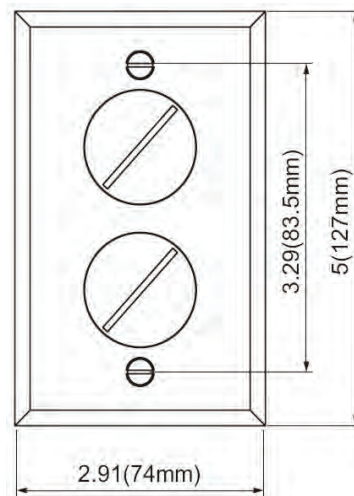


84002 - 84003

CAT. NO.	COVER MATERIAL	INNER BOX	OUTER BOX
HINGED LID DUPLEX FLOOR BOX ASSEMBLY			
84000	BRASS	I	20
84001	NICKEL PLATED BRASS	I	20
SCREW LID DUPLEX FLOOR BOX ASSEMBLY			
84002	BRASS	I	20
84003	NICKEL PLATED BRASS	I	20




LED Dimmers 12V/24V DC

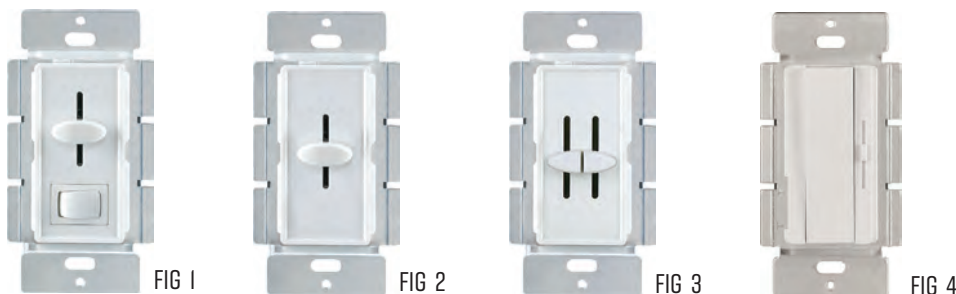

- LED Compatible
- 12V or 24V DC
- PWM DIMMING
- Decorative PC Housing & Face
- MOV Surge Suppression

CAT. NO.	FIG	VOLTAGE (DC)	FUNCTIONS	SWITCH RATING	LED/CFL WATTS	FLUORESCENT WATTS	CASE QTY
82840	1	12/24V	SLIDE/ON/OFF SWITCH	1P	60	NO	10/60
82841	1	12/24V	SLIDE/ON/OFF SWITCH	3 WAY	60	NO	10/60
82842	2	12/24V	SLIDE	1P	60	NO	10/60
82843	2	12/24V	SLIDE	3 WAY	60	NO	10/60
82844	2	12/24V	SLIDE	1P	100	NO	10/60
82845	3	12/24V	DUAL SLIDE	2P	60 PER POLE	NO	10/60
82860	4	12/24V	ROCKER	1P	60	NO	10/60
82861	4	12/24V	ROCKER	3 WAY	60	NO	10/60
82850	4	12/24V	ROCKER	3 WAY	100	NO	10/60

LED Dimmers 120 VAC

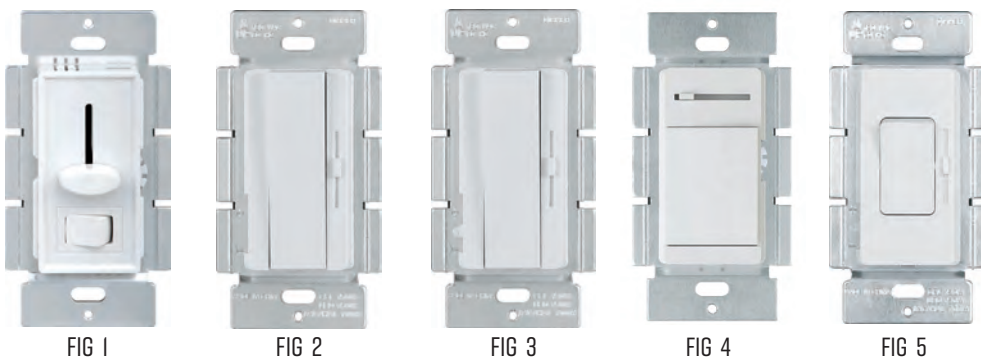

- LED Compatible
- 120V
- TRIAC Dimming
- Full Range Dimming
- MOV Surge Suppression
- Decorative PC Housing

CAT. NO.	FIG	VOLTS	FUNCTIONS	SWITCH RATING	LED/CFL WATTS	FLUORESCENT WATTS	MICRO CONTROLLER	SENSITIVITY ADJ DIAL	CASE QTY
82859	1	120V	SLIDE/ON/OFF SWITCH	1 POLE	150	700	NO	YES	10/60
82846	1	120V	SLIDE/ON/OFF SWITCH	3 WAY	150	700	NO	YES	10/60
82847	2	120V	ROCKER	1 POLE	150	600	NO	NO	10/60
82848	2	120V	ROCKER	3 WAY	150	600	NO	NO	10/60
82862	2	120V	ROCKER	1 POLE	150	700	NO	YES	10/60
82849	2	120V	ROCKER	3 WAY	150	700	NO	YES	10/60
82863	3	120V	ROCKER	1 POLE	150	600	YES	NO	10/60
82853	3	120V	ROCKER	3 WAY	150	600	YES	NO	10/60
82864	4	120V	SLIDE/ON/OFF SWITCH	1 POLE	150	600	YES	NO	10/60
82865	4	120V	SLIDE/ON/OFF SWITCH	3 WAY	150	600	YES	NO	10/60
82855	5	120V	SLIDE/ROCKER	1 POLE/3 WAY	150	700	NO	YES	10/60

LED Dimmers - 120 VAC 0-10V Dimming



- LED Compatible
- 0-10V Dimming
- 120/277V
- LED, CFL & Electronic Self Ballasted Applications
- MOV Surge Suppression
- Decorative PC Housing
- Adjustable High end/Low End trim Sensitivity Dial to Optimize dimming
- Title 24
- cULus Listed

CAT. NO.	FIG	VOLTAGE	FUNCTIONS	SWITCH RATING	LED/CFL WATTS	INCANDESCENT WATTS	AMPS	CASE QTY
82851	1	120/277V	ROCKER	1P/3 WAY	150W	600	3A @120V; 1A @ 277V	60
82852	2	120/277V	ROCKER	1P/3 WAY	150W	600	6A @120V; 3A @ 277V	60
82854	3	120/277V	ROCKER	1P/3 WAY	150W	600	6A @120V; 3A @ 277V	60

Dimmer With Motion Sensor

- PIR Motion Sensor
- Sensitivity, Light Level and Time Delay Settings
- Resistive: 3A
- Motor: 1/8 HP
- 180° Coverage
- 1200 Sq Ft Area
- LED, CFL & Electronic Self Ballasted Applications
- Operating Temperature: -4°F To 140°F
- LED Compatible
- 120-277V
- MOV Surge Suppression
- Decorative PC Housing
- UL Listed

CAT. NO.	VOLTAGE	DIMMING	SWITCH RATING	LED/CFL WATTS	BALLAST WATTS	CASE QTY
82656	120-277V	0-10V	1P	150W	800W	10/60
82657	120-277V	0-120V	1P	150W	800W	10/60



Dual Slide Fan Speed and Light Controls

- LED Compatible
- Fan Control: 3 Speed or Fully Variable
- Light Control: Fully Variable
- 120V
- LED, CFL & Electronic Self Ballasted Applications
- Operating Temperature: 32°F To 104°F
- Material: PC Housing and Face Plate
- cULus or ETL Listed

CAT. NO.	VOLTAGE	FUNCTIONS	SWITCH RATING	CURRENT RATING	LED WATTS	INCANDESCENT/HALOGEN WATTS	CASE QTY
82654	120V	3 SPEED	1P	5A	150W	360W	10/60
82655	120V	FULL VARIABLE	1P	2.5A	150W	360W	10/60



Slide Fan Speed Control

- Fan Control: 3 Speed
- 120V
- Operating Temperature: 32°F To 104°F
- Material: PC Housing and Face Plate
- ETL Listed

CAT. NO.	VOLTAGE	FUNCTIONS	SWITCH RATING	CURRENT RATING	CASE QTY
82664	120V	SLIDE SWITCH	1P	2.5A	10/60



Rotary Fan Speed Control

- Rotary Fan Control
- 120V
- Rotary On/Off
- Material: PC Housing and Face - Includes Face Plate
- RFI Suppression
- cULus Listed

CAT. NO.	COLOR	VOLTAGE	FUNCTIONS	SWITCH RATING	CURRENT	CASE QTY
82610	IVORY	120V	3 SPEED	1P	2.5A	10/60
82611	WHITE	120V	3 SPEED	1P	2.5A	10/60
82613	ALMOND	120V	3 SPEED	1P	2.5A	10/60
82620	IVORY	120	4 SPEED	3 WAY	1.25A	10/60
82621	WHITE	120	4 SPEED	3 WAY	1.25A	10/60



Wall Mount Occupancy/Vacancy Sensor - PIR



- The Passive Infrared (PIR) Sensor detects motion by sensing the difference between body heat and ambient room temperature
- PIR Occupancy Sensor works best in offices, conference rooms and other commonly used areas without obstructions
- Vacancy Setting allows for Manual ON/Auto OFF Function
- Auto ON/OFF & Manual ON/Auto OFF
- 30Ft Range When Mounted at 4ft Height
- LED Indicator for visibility in darkened rooms
- Adjustable Light Level Sensitivity Settings
- Time Delay Off setting is adjustable from 5 Seconds to 30 minutes
- Removable Cover with mode settings and dip switch adjustments
- Decorative Wall Plate Included
- Polycarbonate
- Compatible with Incandescent, Electronic Ballast Fluorescent, Compact Fluorescent, Magnetic Low Voltage, Electronic Low Voltage, LED lighting
- Conforms to California Title 24 Energy Code
- 60Hz
- Neutral Required

CAT. NO.	COLOR	SWITCH TYPE	SWITCH RATING	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTAGE	TIME DELAY	CASE QTY
80520	IVORY	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	5 SEC-30 MIN	50
80521	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	5 SEC-30 MIN	50
80540	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE 3-WAY	800W @ 120V 1200W @ 277V	180°	120-277V	5 SEC-30 MIN	50

Wall Mount Occupancy/Vacancy Sensor - No Neutral - PIR



- The Passive Infrared (PIR) Sensor detects motion by sensing the difference between body heat and ambient room temperature
- Wall switch works best in offices, conference rooms and other commonly used areas
- Vacancy Setting allows for Manual ON/Auto OFF Function
- Auto ON/OFF & Manual ON/Auto OFF
- 30Ft Range When Mounted at 4ft Height
- LED indicator for visibility in darkened rooms
- Adjustable Light Level Sensitivity Settings
- Time delay Off setting is adjustable from 5 Seconds to 30 minutes
- Removable Cover with mode settings and dip switch adjustments
- Decorator Wall Plate Included
- Polycarbonate
- Compatible with Incandescent, Electronic Ballast Fluorescent, Compact Fluorescent, Magnetic Low Voltage, Electronic Low Voltage, LED lighting
- Conforms to California Title 24 Energy Code
- 60Hz
- No Neutral Required

CAT. NO.	COLOR	SWITCH TYPE	SWITCH CONFIGURATION	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTAGE	TIME DELAY	CASE QTY
80528	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	5 SEC - 30 MIN	50
80532	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE 3 WAY	800W @ 120V 1200W @ 277V	180°	120-277V	5 SEC - 30MIN	50

Wall Mount Occupancy/Vacancy Sensor - Double Pole - PIR



- The Passive Infrared (PIR) sensor detects motion by sensing the difference between body heat and ambient room temperature
- Wall switch works best in offices, conference rooms and commonly used areas
- Vacancy Setting allows for Manual ON/Auto OFF Function
- LED indicator for visibility in darkened rooms
- 30Ft Range When Mounted at 4Ft Height
- Adjustable Light Level Sensitivity Settings
- Time delay Off setting is adjustable from 5 Seconds to 30 minutes
- Removable Cover with mode settings and dip switch adjustments
- Decorative Wall Plate Included
- Compatible with Incandescent, Electronic Ballast Fluorescent, Compact Fluorescent, Magnetic Low Voltage, Electronic Low Voltage, LED lighting
- Button 1: Manual On/Auto Off; Button 2: Standby & OCC/VAC Selectable
- Conforms to California Title 24 Energy Code
- Neutral Required for Cat#: 80544



CAT. NO.	COLOR	SWITCH TYPE	SWITCH CONFIGURATION	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTAGE	CASE QTY
80544	WHITE	ON/OFF AUTO MANUAL ON/AUTO OFF	DOUBLE POLE	800W @ 120V	180°	120V	50
80548	WHITE	ON/OFF AUTO MANUAL ON/AUTO OFF	DOUBLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	50

Ceiling Sensor Switch - PIR



- The Passive Infrared (PIR) sensor detects motion by sensing the difference between body heat and ambient room temperature
- Adjustable Light Level Sensitivity Settings
- Auto ON/OFF
- Time delay Off setting is adjustable from 15 seconds to 30 minutes
- No ground required
- Compatible with Incandescent, Electronic Ballast Fluorescent, Compact Fluorescent, Magnetic Low Voltage, Electronic Low Voltage, LED lighting
- Polycarbonate
- Conforms to California Title 24 Energy Code
- No Separate Power Pack Required



CAT. NO.	COLOR	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTAGE	CASE QTY
80552	WHITE	800W @ 120V 1200W @ 277V	360° 20 FT DIAMETER @ 15 FT HEIGHT 15 FT DIAMETER @ 10 FT HEIGHT	120-277V	50

Hi-Bay Sensor Switch - PIR



- The Passive Infrared (PIR) sensor detects motion by sensing the difference between body heat and ambient room temperature
- Threaded Stem For Mounting In Linear High-Bay Fixture
- Adjustable Light Level Sensitivity Settings
- Time delay Off setting is adjustable from 15 seconds to 30 minutes
- No ground required
- Compatible with Incandescent, Electronic Ballast Fluorescent, Compact Fluorescent, Magnetic Low Voltage, Electronic Low Voltage, LED lighting
- Polycarbonate
- Conforms to California Title 24 Energy Code
- No Separate Power Pack required



CAT. NO.	COLOR	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTAGE	CASE QTY
80556	WHITE	800W @ 120V 1200W @ 277V	360° - 30FT HEIGHT & 40FT DIAMETER	120-277V	50





CAT 6 (RJ-45) Unshielded Keystone Jacks



- CAT 6 components provide better insertion loss, return loss, & NEXT & FEXT characteristics, resulting in higher signal to loss ratios and a more reliable network
- Complies with TIA/EIA-568-C-2, ISO 1801 2nd Edition Class E, NEC Article 800
- 10 Gbps
- 250 MHz Bandwidth
- 110 Punchdown & Krone Type Termination
- 8 Conductor 22-26 AWG Solid & Stranded Wire
- 568A & 568B Wiring - Color Coded
- 50u Gold Plated Contacts
- Flammability Rating: UL94V-0

CAT. NO.	COLOR	MASTER BAG QTY
88420	IVORY	10
88421	WHITE	10
88422	BLUE	10
88423	RED	10
88424	YELLOW	10
88425	BLACK	10
88426	GREEN	10
88427	ORANGE	10
88428	LT. ALMOND	10

CAT 6 (RJ-45) Unshielded Keystone Jacks - Rear Entry



- Same Features as Standard CAT6 Jacks listed above
- Conductor Termination at Rear of Jack

CAT. NO.	COLOR	MASTER BAG QTY
88030	IVORY	10
88031	WHITE	10

CAT 6 (RJ-45) Unshielded Keystone Jacks - Toolless



- Same Features as Standard CAT6 Jacks listed above
- Conductor Termination at Rear of Jack

CAT. NO.	COLOR	MASTER BAG QTY
88012	IVORY	10
88013	WHITE	10

CAT 6 High Density Patch Panels



- Complies with TIA/EIA-568-C-2, ISO 1801 2nd Edition Class E, NEC Article 800
- Fits all Standard 19" Racks, Brackets & Cabinets
- 110 Punchdown & Krone Type Termination
- 10 Gbps, 250 MHz Bandwidth
- 12 Port Patch Panel includes 89D Mounting Bracket

CAT. NO.	PORTS	DIMENSIONS	CASE QTY
88442	12 PORT PATCH PANEL	H 2.25" X W 10" X D 1.32"	25
88444	24 PORT PATCH PANEL	H 1.75" X W 19" X D 1.32"	25
88446	48 PORT PATCH PANEL	H 3.50" X W 19" X D 1.32"	5

CAT 6 UTP Patch Cords



- CAT 6 patch cords provide better insertion loss, return loss, & NEXT & FEXT characteristics, resulting in higher signal to loss ratios and a more reliable network
- Complies with TIA/EIA-568-C-2, ISO 1801 2nd Edition Class E, NEC Article 800
- 10Gbps, 250 MHz Bandwidth
- 2-RJ45 Gold Plated 50u 8P8C Plugs
- 24AWG 4 Pair Stranded Wire
- Color: White

CAT. NO.	LENGTH	CASE QTY
88452	3'	300
88454	5'	200
88458	10'	120
88460	14'	100
88462	20'	80

CAT 5E (RJ-45) Unshielded Keystone Jacks



CAT. NO.	COLOR	MASTER BAG QTY
88020	IVORY	10
88021	WHITE	10
88022	BLUE	10
88023	RED	10
88024	YELLOW	10
88028	LT. ALMOND	10

- CAT 6 patch cords provide better insertion loss, return loss, & NEXT & FEXT characteristics, resulting in higher signal to loss ratios and a more reliable network
- Complies with TIA/EIA-568-C-2, ISO 1801 2nd Edition Class E, NEC Article 800
- 10Gbps, 250 MHz Bandwidth
- 2-RJ45 Gold Plated 50u 8P8C Plugs
- 24AWG 4 Pair Stranded Wire
- Color: White



CAT 5E (RJ-45) Unshielded Keystone Jacks - Rear Entry



CAT. NO.	COLOR	MASTER BAG QTY
88015	IVORY	10
88016	WHITE	10

- Same Features as Standard CAT5E Jacks listed above
- Conductor Termination at Rear of Jack



CAT 5E High Density Patch Panels



- Complies with TIA/EIA-568-A-5, ISO 1801 2nd Edition Class D, NEC Article 800
- Fits all Standard 19" Racks, Brackets & Cabinets
- 110 Punchdown & Krone Type Termination
- 1 Gbps, 100 MHz Bandwidth
- 12 Port Patch Panes includes 89D Mounting Bracket

CAT. NO.	PORTS	DIMENSIONS	CASE QTY
88042	12 PORT PATCH PANEL	H 2.25" X W 10" X D 1.32"	25
88044	24 PORT PATCH PANEL	H 1.75" X W 19" X D 1.32"	25
88046	48 PORT PATCH PANEL	H 3.50" X W 19" X D 1.32"	10

CAT 5E UTP Patch Cords



CAT. NO.	LENGTH	CASE QTY
88312	3'	300
88314	5'	200
88318	10'	120
88320	14'	100

- Complies with TIA/EIA-568-A-5, ISO 1801 2nd Edition Class D, NEC Article 800
- 1 Gbps, 100 MHz Bandwidth
- 2-RJ45 Gold Plated 50u 8P8C Plugs
- 24 AWG 4 Pair Stranded Wire
- Color: Blue





Hinged 19" Patch Panel Wall Mount Brackets



- For 19" Wide 24 & 48 Port Patch Panels
- Hold panels 6" from wall
- Provides a rear cable entry
- Opening for easy cable access
- Threaded holes follow standard EIA pattern

CAT. NO.	HEIGHT	PANEL SIZE	CASE QTY
88052	1-3/4"	24 PORT	2
88054	3-1/2"	48 PORT	2

Wallplates for Keystone Jacks and Modular Inserts



DECORATIVE DATACOMM FRAMES

(Outer Wallplate Sold Separately)



FIG 1

DECORATIVE DATACOMM FRAMES (FIG 1)

CAT. NO.	COLOR	PORTS	GANG	BAG QTY
88102	IVORY	1	1	10
88104	IVORY	2	1	10
88106	IVORY	3	1	10
*88108	IVORY	4	1	10
*88110	IVORY	6	1	10
88112	WHITE	1	1	10
88114	WHITE	2	1	10
88116	WHITE	3	1	10
*88118	WHITE	4	1	10
*88120	WHITE	6	1	10
88124	LT. ALMOND	2	1	10
*88128	LT. ALMOND	4	1	10
*88130	LT. ALMOND	6	1	10

DATACOMM WALLPLATES

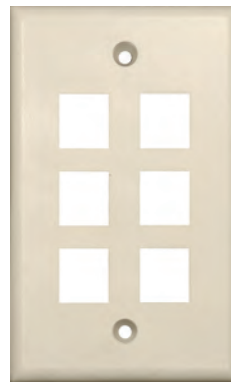


FIG 2

DATACOMM WALLPLATES (FIG 2)

CAT. NO.	COLOR	PORTS	GANG	BAG QTY
88142	IVORY	1	1	10
88144	IVORY	2	1	10
88146	IVORY	3	1	10
88148	IVORY	4	1	10
88150	IVORY	6	1	10
88162	WHITE	1	1	10
88164	WHITE	2	1	10
88166	WHITE	3	1	10
88168	WHITE	4	1	10
88170	WHITE	6	1	10
88184	LT. ALMOND	2	1	10
88186	LT. ALMOND	3	1	10
88188	LT. ALMOND	4	1	10
88190	LT. ALMOND	6	1	10

- Use with Keystone Jacks & Modular Inserts located on pages W1, W2 & W4
*Note that 4 & 6 gang Datacomm Inserts can only be used with Keystone Jacks 88030 & 88031 (Pg W1) & Modular Inserts (Pg W4)
- Decorative DataComm Frames & Wallplates Mount in Standard Junction Boxes
- Material - Polycarbonate

Surface Mount Boxes For Keystone Jacks



- Housing Only
- Accepts Cat 3/5/5E/6 RJ-45 Keystone Jacks
- Adhesive Backed
- Snap-On 2-Piece Base & Cover

CAT. NO.	DIMENSIONS	COLOR	BAG QTY
1 GANG SURFACE MOUNT BOXES			
88252	1-1/8" X 1-1/8" X 2-1/4"	IVORY	10
88254	1-1/8" X 1-1/8" X 2-1/4"	WHITE	10
2 GANG SURFACE MOUNT BOXES			
88256	2-1/8" X 2-1/4" X 1-1/8"	IVORY	10
88258	2-1/8" X 2-1/4" X 1-1/8"	WHITE	10

DataComm & Coaxial Modular Inserts

CAT. NO.	FIGURE	COLOR	BAG QTY
ST FIBER CONNECTORS			
88220	1	IVORY	10
88222	1	WHITE	10
F CONNECTORS			
88216	2	IVORY	10
88218	2	WHITE	10
88219	2	LT. ALMOND	10
BNC CONNECTORS			
88212	3	IVORY	10
88214	3	WHITE	10
BLANK INSERTS			
88224	4	IVORY	10
88226	4	WHITE	10
88227	4	LT. ALMOND	10



FIG 1



FIG 2



FIG 3

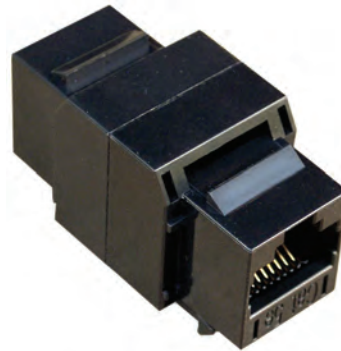


FIG 4

CAT 5E UTP Cord Coupler

- For RJ 45 Jacks/Patch Cords/Cables
- Mounts in Keystone Patch Panel or Plate
- Female to Female Configuration
- 1 Gbps
- 100 Mhz
- Contacts have 50u Gold Plating
- Flammability Rating: UL94V-0

CAT. NO.	COLOR	BAG QTY
88240	BLACK	10



Phone & DataComm Plugs/Cord Ends

CAT NO.	TYPE	USAGE	BAG QTY
40120	RJ11 - 4 CONDUCTOR	PHONE WALL JACK	50
88611	RJ45 - STRANDED	CAT5E WALL JACK	50
88612	RJ45 - SOLID	CAT5E WALL JACK	50
88614	RJ45 - STRANDED	CAT6 WALL JACK	50





9 Port Phone Expansion Module



BASIC TELEPHONE DISTRIBUTION



- 4-pair 110 IDC punchdown blocks bridge up to 4 telephone lines to 9 locations connect up to 9 separate phones per line
- The 1st 110 input connection is terminated to the demarcation point, (9) 110 punch-down outputs
- Circuit board module includes mounting feet & hardware
- 6-1/2"(W) x 1-7/8"(H) x 1-1/2"(D)

CAT. NO.	PORTS	CASE QTY
87112	9	40

8 Port Cat 5E Voice/Data Module



BASIC HOME NETWORKING EXPANSION MODULE



- Patch phone or data connections to 8 locations
- Combine with a TLDM, key system, or network hubs for additional applications
- Printed circuit board module with mounting feet & hardware
- (8) 4-pair 110 Punchdowns and (8) CAT 5e RJ-45 outputs
- 6-1/2"(W) x 1-7/8"(H) x 1-1/2"(D)

CAT. NO.	PORTS	CASE QTY
87114	8	40

8 Port Phone/Security Expansion Module



BASIC TELEPHONE DISTRIBUTION



- Bridge up to 4 telephone lines to 8 locations, connect up to 8 separate telephones per line or connect to security system
- (1) 110 Punchdown & (1) RJ31 inputs - (1) RJ45 & (8) 110 Punchdown outputs
- Printed circuit board module includes mounting feet & hardware
- 6-1/2"(W) x 1-7/8"(H) x 1-1/2"(D)

CAT. NO.	PORTS	CASE QTY
87116	8	20

Voice/Cat 5E Data Expansion Module




BASIC HOME NETWORKING EXPANSION MODULE



- Bridge up to 4 telephone lines or Cat 5E Data to 10 locations
- (1) Incoming 4-pair phone/Cat 5E punchdown block, (1) RJ 45 Port & (10) outgoing RJ-45 jacks
- Combine with a Category 5e board to route phone to remote locations
- Printed circuit board module with mounting feet & hardware
- 6-1/2"(W) x 1-7/8"(H) x 1-1/2"(D)

CAT. NO.	PORTS	CASE QTY
87124	11	40

Voice/Cat 5E Data/Security Expansion Module

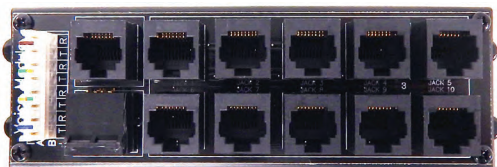

BASIC HOME NETWORKING EXPANSION MODULE



- Bridge telephone, Cat 5E Data or Security to 10 locations
- Combine with a Category 5e board to route phone to remote locations
- (1) Incoming 4-pair phone/Cat 5E punchdown block, (1) RJ 31 Port, (1) RJ 45 Port & (10) outgoing RJ-45 jacks
- Printed circuit board module with mounting feet & hardware
- 6-1/2"(W) x 1-7/8"(H) x 1-1/2"(D)

CAT. NO.	PORTS	CASE QTY
87120	11	20

2-Way Splitter

- Allows 2 units to be operated from one source
- Accepts coaxial 'F' fittings
- 900 Mhz

CAT. NO.	FREQUENCY MHZ	TYPE	BAG QTY	MASTER BOX QTY
45025	900	STANDARD	10	100

Split Feed Splitter

- Split Feed/Directional Coupler
- Maintains Signal Bandwidth In Multi-Unit Dwelling Applications
- High Isolation of Reflected Signals
- Tap Value: 12 dB
- Max Insertion Loss: 1 dB
- Isolation Output-Tap: 35 dB
- Return Loss: 20 dB
- 75 Ohm

CAT. NO.	FREQUENCY MHZ	TYPE	BAG QTY
45028	1000	DIGITAL	10

2-Way Splitter With Ground Block

- Allows 2 units to be operated from one source
- Accepts coaxial 'F' fittings

CAT. NO.	FREQUENCY MHZ	TYPE	BAG QTY	MASTER BOX QTY
45030	900	STANDARD	10	50
45032	1000	DIGITAL	10	50
45034	2050	SATELLITE	10	50

3-Way Splitter With Ground Block

- Allows 3 units to be operated from one source
- Accepts coaxial 'F' fittings

CAT. NO.	FREQUENCY MHZ	TYPE	BAG QTY	MASTER BOX QTY
45040	900	STANDARD	10	30
45042	1000	DIGITAL	10	30
45044	2050	SATELLITE	10	30

4-Way Splitter With Ground Block


- Allows 4 units to be operated from one source
- Accepts coaxial 'F' fittings

CAT. NO.	FREQUENCY MHZ	TYPE	BAG QTY	MASTER BOX QTY
45050	900	STANDARD	10	30
45052	1000	DIGITAL	10	30
45054	2050	SATELLITE	10	30

8-Way Splitter With Ground Block

- Allows 8 units to be operated from one source
- Accepts coaxial 'F' fittings

CAT. NO.	FREQUENCY MHZ	TYPE	BAG QTY	MASTER BOX QTY
45055	900	STANDARD	1	10
45057	1000	DIGITAL	1	10
45059	2050	SATELLITE	1	10





Type 'F' Coaxial Connector - Crimp-On



- Terminates coaxial cable
- Crimp on to prepared cable end

CAT. NO.	TYPE	BAG QTY	MASTER BAG QTY
45060	RG6	10	100
45062	RG6/U	10	100
45070	RG59	10	100

Type 'F' Coaxial Connector - Twist-On



- Terminates coaxial cable
- Twist on to prepared cable end
- No Tool required

CAT. NO.	TYPE	BAG QTY	MASTER BAG QTY
45080	RG6	10	100
45090	RG59	10	100

Coaxial Cable Terminator



- Attach to unused terminals of splitters, couplers, amplifiers & outlets
- Built-in resistor reduces ghosting & feedback

CAT. NO.	BAG QTY	MASTER BAG QTY
45095	10	100

Female To Female Coax Coupler



- Couples 2 coaxial cables together that terminate in 'F' plugs
- Includes Nut & Washer

CAT. NO.	BAG QTY	MASTER BAG QTY
45100	10	100

Coaxial Compression Connectors

- Visible Post Design - User friendly, eliminates damage to cable foil & dielectric
- Improved signal performance
- Water-tight seal for outdoor applications & superior durability in all climates
- 21mm (.827") or 35.7mm (1.40") travel compression crimp protects the center conductor from damage
- Permanent connections do not pull out or become loose - >50 lbs Retention Force
- Large tapered entry allows for easy cable insertion
- Gold Plated contacts
- RF signal containment ensures strong signal
- Bandwidth: 0-3 GHz
- Return Loss: -30 db @1 GHz
- Insertion Loss: < .1db @ 1 GHz
- Shielding Effectiveness: 80 db
- Operating Temperature: -40°F (-40°C) ~ 140°F (60°C)
- Cable Retention: >50 lbs
- Meets or Exceeds all SCTE specifications
- 45073, 45077 & 45079 are all brass exterior construction for superior durability

USED BY CABLE TV
& SATELLITE
COMPANIES

COMPRESSION
PUSH-LOCK
DESIGN

CAT. NO.	TYPE	DESCRIPTION	BAG QTY
F MALE COMPRESSION			
45075	RG6	STD & TRI SHIELD	10
45071	RG6	STD & TRI SHIELD	100
F MALE COMPRESSION - HI-CONTINUITY			
45072	RG6U	STD, TRI & QUAD SHIELD	10
45078	RG6U	STD, TRI & QUAD SHIELD	100
45076	RG59	STD, TRI & QUAD SHIELD	10
F MALE COMPRESSION - HI-CONTINUITY - ALL BRASS (PREMIER CONNECTOR)			
45073	RG6U	STD, TRI & QUAD SHIELD	10
45079	RG6U	STD, TRI & QUAD SHIELD	100
45077	RG11U	STD, TRI & QUAD SHIELD	10
BNC MALE COMPRESSION			
45102	RG6U QUAD SHIELD	STD, TRI & QUAD SHIELD	10
45106	RG59U QUAD SHIELD	STD, TRI & QUAD SHIELD	10
RCA MALE COMPRESSION			
45112	RG6U QUAD SHIELD	STD, TRI & QUAD SHIELD	10
45116	RG59U QUAD SHIELD	STD, TRI & QUAD SHIELD	10



45071/45075



45072/45078



45073/45079



45077



45076



45102, 45106



45112, 45116



WIRING DEVICES

Voice/Datacom - Coaxial Connectors



HDMI Home Entertainment Wallplates



80442



80444



80446



80448



80452



80454

- High Definition 1080p & 1080i Video Connectors
- Supports DTS-HD, Dolby True HD & 7.1 Channel Surround Sound Audio
- Supports HDCP, EDID, DDC
- Supports 24-bit True Color
- HDMI & RCA Connector Configurations
- Decorative Style Plate
- Gold Plated Contacts
- Flame Resistant UL 94V-0 Lexan

CAT. NO.	COLOR	CONFIGURATION	BOX QTY
80442	WHITE	1 HDMI	75
80444	WHITE	2 HDMI	75
80446	WHITE	1 HDMI, 1 RCA (RED)	75
80448	WHITE	1 HDMI 1 F CONN	75
80450	WHITE	1 HDMI & 2 RCA (RED & WHITE)	75
80452	WHITE	1 HDMI & 3 RCA (R,W,Y)	75
80454	WHITE	1 HDMI & 3 RCA (R,G,B)	75

Kitchen Phone Plates



- Used in Kitchen Applications
- 4 Conductor RJ11, RJ14 Jacks
- Non-Metallic

CAT. NO.	COLOR	BAG QTY	MASTER BOX QTY
80030	IVORY	10	100
80031	WHITE	10	100
80033	LT. ALMOND	10	100

Cord Coupler



- Connect/Splice 2 Modular Cords
- 4 Conductor RJ11, RJ14
- Ivory

CAT NO.	DESCRIPTION	BAG QTY
40100	CORD COUPLER	50

1 To 2 Line Splitter



- Split 1 Line Into 2 Separate Lines
- 4 Conductor RJ11, RJ14
- Ivory

CAT NO.	DESCRIPTION	BAG QTY
40090	1 TO 2 LINE SPLITTER	50

Phone & Coax Plates



- Flush Phone Plates
- 4 & 6 Conductor
- Flammability Rating: UL94V-0
- 50 Micro Inch Gold Plating
- UL 1863 Listed & Complies with NEC Article 800-51

CAT. NO.	FIG	COLOR	BAG QTY	MASTER BOX QTY
SINGLE RJ11, RJ14 PHONE - 4 CONDUCTOR				
80010	1	IVORY	10	100
80011	1	WHITE	10	100
80012	1	BROWN	10	100
80013	1	LT. ALMOND	10	100
SINGLE RJ11, RJ14, RJ25 PHONE - 6 CONDUCTOR				
86010	1	IVORY	10	100
86011	1	WHITE	10	100
86013	1	LT. ALMOND	10	100
DOUBLE RJ11, RJ14 PHONE - 4 CONDUCTOR				
80020	2	IVORY	10	100
80021	2	WHITE	10	100
80023	2	LT. ALMOND	10	100
SINGLE RJ11, RJ14 PHONE & SINGLE F CONNECTOR				
80056	3	IVORY	10	100
80057	3	WHITE	10	100
80059	3	LT. ALMOND	10	100
SINGLE F CONNECTOR				
85010	4	IVORY	10	100
85011	4	WHITE	10	100
85012	4	BROWN	10	100
85013	4	LT. ALMOND	10	100
DUAL F CONNECTOR				
85020	5	IVORY	10	100
85021	5	WHITE	10	100
85023	5	LT. ALMOND	10	100
DUAL F CONNECTOR & SINGLE PHONE - 4 CONDUCTOR				
85030	6	IVORY	10	100
85031	6	WHITE	10	100
85033	6	LT. ALMOND	10	100



FIG 1



FIG 2



FIG 3



FIG 4



FIG 5



FIG 6



Mid-Size Phone & Coax Plates

- Flush Mid-Size Phone Plates
- 4 Conductor RJ11, RJ14 Jacks
- Flammability Rating: UL94V-0
- 50 Micro Inch Gold Plating
- UL 1863 Listed & Complies with NEC Article 800-51

CAT. NO.	FIG	COLOR	BAG QTY	MASTER BOX QTY
SINGLE RJ11, RJ14 PHONE - 4 CONDUCTOR				
87010	1	IVORY	10	100
87011	1	WHITE	10	100
87013	1	LT. ALMOND	10	100
DUAL RJ11, RJ14 PHONE - 4 CONDUCTOR				
87021	2	WHITE	10	100
87023	2	LT. ALMOND	10	100
SINGLE F CONNECTOR				
87510	3	IVORY	10	100
87511	3	WHITE	10	100



FIG 1



FIG 2



FIG 3



Surface Mount Phone Jacks

- Surface Mount 4 Conductor RJ11, RJ14 Jacks
- Flammability Rating: UL94V-0

CAT. NO.	COLOR	BAG QTY	MASTER BOX QTY
SINGLE GANG			
80050	IVORY	10	100
80051	WHITE	10	100
DOUBLE GANG			
80053	IVORY	10	100
80054	WHITE	10	100
80055	LT. ALMOND	10	100



WIRING DEVICES

Voice/Datacom - Phone Plates



1 Piece Decorative Phone & Coax Plates



FIG 1

FIG 2

FIG 3



FIG 4

FIG 5

- Flush Decorative Phone Plates
- 4 Conductor RJ11, RJ14 Jacks
- Flammability Rating: UL94V-0
- 50 Micro Inch Gold Plating
- UL 1863 Listed & Complies with NEC Article 800-51

CAT. NO.	FIG	COLOR	BAG QTY	MASTER BOX QTY
SINGLE RJ11, RJ14 PHONE				
80060	1	IVORY	10	100
DUAL RJ11, RJ14 PHONE				
80070	2	IVORY	10	100
80071	2	WHITE	10	100
SINGLE RJ11, RJ14 PHONE & SINGLE F CONNECTOR				
80080	3	IVORY	10	100
80081	3	WHITE	10	100
SINGLE F CONNECTOR				
85015	4	IVORY	10	100
85016	4	WHITE	10	100
DUAL F CONNECTOR				
85120	5	IVORY	10	100
85121	5	WHITE	10	100

2 Piece Decorative Phone & Coax Plates



FIG 1

FIG 2



FIG 3

FIG 4

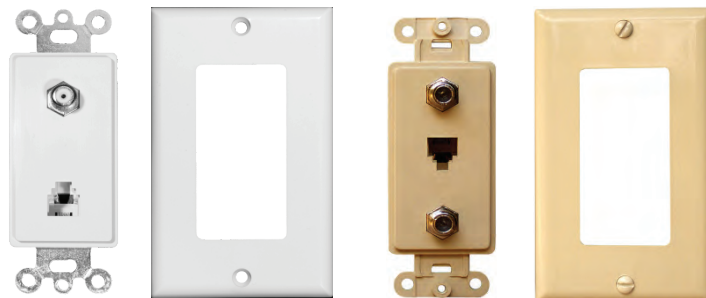


FIG 5

FIG 6

- Flammability Rating: UL94V-0
- 4 Conductor RJ11, RJ14 Jacks
- 50 Micro Inch Gold Plating
- UL 1863 Listed & Complies with NEC Article 800-51

CAT. NO.	FIG	COLOR	BAG QTY	MASTER BOX QTY
SINGLE RJ11, RJ14 PHONE				
80160	1	IVORY	10	100
80161	1	WHITE	10	100
80163	1	LT ALMOND	10	100
DOUBLE RJ11, RJ14 PHONE				
80170	2	IVORY	10	100
80171	2	WHITE	10	100
80173	2	LT ALMOND	10	100
SINGLE F CONNECTOR				
85115	3	IVORY	10	100
85116	3	WHITE	10	100
85118	3	LT ALMOND	10	100
DUAL F CONNECTOR				
85220	4	IVORY	10	100
85221	4	WHITE	10	100
85223	4	LT ALMOND	10	100
SINGLE RJ11, RJ14 PHONE & SINGLE F CONNECTOR				
80180	5	IVORY	10	100
80181	5	WHITE	10	100
80183	5	LT ALMOND	10	100
DUAL F CONNECTOR & SINGLE RJ11, RJ14 PHONE				
85230	6	IVORY	10	100
85231	6	WHITE	10	100
85233	6	LT ALMOND	10	100

Insulation Displacement Connectors (IDC) Telecommunications Splicing

- IDC connectors create fast splice and tap
- Corrosion resistant gel sealant protects connection
- Low voltage telecommunication cable applications
- Quick, easy one-step splicing
- Use with solid copper single-conductor wire
- UB - 2 Wire Tap Splice - permits tapping onto conductors without service interruption
- UR - 3 Wire Butt Splice - Tap onto Telecomm lines in ready-access cases for pedestal mounts, pigtail joints etc.
- UR2 - Telecomm or AC Power (220V) rated to tap onto load coils such as toll cable splicing
- UY - 2 Wire Butt Splice - designed for straight butt style splicing for Telecomm
- UY2 - Telecomm or AC Power (220V) Rated
- UCC - 2 Wire Butt Splice - designed as a butt type wire end cap without mechanical termination
- Complies with REA PE-52
- Complies with TIA/EIA 568-A Par 10.4.4 CAT-5 Std



UB 2 PORT



UR & UR2 3 PORT



UY & UY2 2 PORT




UCC

CAT. NO.	TYPE	DESCRIPTION	COLOR	WIRE RANGE	INSULATION MAX O.D.	W	L	H	BAG QTY	MASTER BAG QTY
25 PACK										
10752	UB	2-PORT TAP SPLICE IDC	BLUE	22-26	.050"	.346"	.492"	.24"	25	100
10754	UR	3-PORT BUTT SPLICE IDC	RED	22-26	.066"	.492"	.768"	.23"	25	100
10755	UR2	3-PORT BUTT SPLICE IDC	RED	19-26	.082"	.492"	.768"	.23"	25	100
10756	UY	2-PORT BUTT SPLICE IDC	YELLOW	22-26	.060"	.346"	.492"	.23"	25	100
10757	UY2	2-PORT BUTT SPLICE IDC	YELLOW	19-26	.082"	.346"	.492"	.23"	25	100
10760	UCC	2-PORT BUTT SPLICE IDC	RED	22-26	.060"	.346"	.492"	.23"	25	100
100 PACK										
10762	UB	2-PORT TAP SPLICE IDC	BLUE	22-26	.050"	.346"	.492"	.24"	100	1000
10764	UR	3-PORT BUTT SPLICE IDC	RED	22-26	.066"	.492"	.768"	.23"	100	1000
10765	UR2	3-PORT BUTT SPLICE IDC	RED	19-26	.082"	.492"	.768"	.23"	100	1000
10766	UY	2-PORT BUTT SPLICE IDC	YELLOW	22-26	.060"	.346"	.492"	.23"	100	1000
10767	UY2	2-PORT BUTT SPLICE IDC	YELLOW	19-26	.082"	.346"	.492"	.23"	100	1000
10770	UCC	2-PORT BUTT SPLICE IDC	RED	22-26	.060"	.346"	.492"	.23"	100	1000

Phone Junction Box

- Split 1 Line Into 2 Separate Lines
- With Mounting Block
- 4 Conductor
- Ivory

CAT. NO.	BAG QTY
40070	50

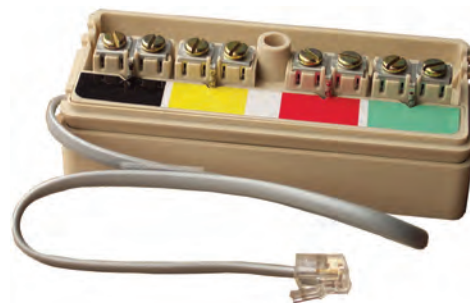

25-Pair 66 Phone Block

- Hooked contacts for smooth wire placement
- Nickel plating gives secure connection
- Clear plastic cover fits over entire block, protects contacts & allows a clear view of all connections without removing cover
- High-Impact PVC construction
- 22-26 Awg Wire
- 10" L x 2"W x 1-1/4" H


CAT. NO.	DESCRIPTION	CASE QTY
40130	WIRING BLOCK AND COVER	10
40132	MOUNTING BRACKET	-



WIRING BLOCK



COVER

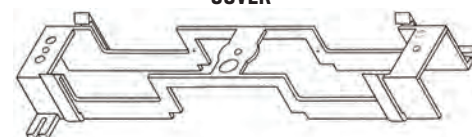

MOUNTING BRACKET





Builder's Chime Kit



KIT CONTENTS:

- (1) Chime (white)
- (2) Push buttons (white)
- (1) 16V 10W transformer

- White cover designed to go with any décor
- High quality sound bars provide pleasing tone
- Sound Level: 83 db Max
- Non-stick buttons & non-stick plungers provide years of trouble-free performance
- Lit Pushbuttons contain 28 Volt low density bulbs for long life
- Easy installation
- Chime Dimensions: 7" x 4" x 2"

CAT. NO.	DESCRIPTION	KITS/CASE
78010A	KIT WITH 2 UNLIT PUSHBUTTONS	24
78020A	AKIT WITH 2 LIT PUSHBUTTONS	24
78000A	CHIME ONLY (NO BUTTONS OR TRANSFORMER)	24

Builder's Chime Kit with 5/8" Diameter Pushbutton



CONTENTS:

- (1) Chime (White)
- (1) Lit gold rim pearl push button
- (1) 16Volt 10 Watt transformer

- White cover designed to go with any décor
- High quality sound bars provide pleasing tone
- Sound Level: 83 db Max
- Non-stick buttons & non-stick plungers provide years of trouble free performance
- Lit Pushbutton contains 28 volt low density bulb for long life
- Easy installation
- Chime Dimensions: 7" x 4" x 2"

CAT. NO.	DESCRIPTION	KITS/CASE
78030A	KIT WITH 1 LIT 5/8" DIA. PUSHBUTTON	24
78031A	KIT WITH 1 LIT 5/8" DIA. STUCCO	24

Bells



- Satin Aluminum finish with Snap-On Cover for easy installation
- May Be operated By 6 VDC or 8-16 VAC transformer

CAT. NO.	DESCRIPTION	DB	AMPS	AMPS/WATTS	CASE QTY
78120A	2 1/2" BELL	90	.68A	11W	40
78130	3" BELL	93	.68A	11W	40
78140A	4" BELL	95	2.2A	35W	40

Buzzer



- Satin Aluminum finish with Snap-On Cover for easy installation
- May Be operated By 6 VDC or 8-16 VAC Transformer
- Max Current 680 mA
- Max dB: 85

CAT. NO.	DESCRIPTION	CASE QTY
78110A	BUZZER	40

Commercial WeatherProof Pushbuttons

- Surface Mount
- 120 Volt
- Mounts flush to Wall or 1/2" EMT
- Silver color
- 5-1/2" X 1-9/16"

CAT. NO.	TYPE	CASE QTY
78244	UNLIT	500



- Surface Mount
- 120 Volt
- 6: Leads
- Silver color
- 5/16" Diameter 1" overall depth
- Cat# 78248 includes 4" X 2-3/4" WallPlate

CAT. NO.	TYPE	CASE QTY
78246	BUTTON ONLY	500
78248	BUTTON W/ PLATE	500



Resi Plastic Pushbuttons

- Surface Mount
- Plastic Material
- White color
- 7/8" X 2-7/8"

CAT. NO.	TYPE	CASE QTY
78231A	UNLIT	500
78232	LIT	500



Resi Round Pushbutton

- 1-3/4" diameter
- Max 16 VDC or 16 VAC
- Traditional round push button
- Attractive Brass finish
- Unlit Surface Mount


CAT. NO.	COLOR	BOX QTY	CASE QTY
78234A	POLISHED BRASS	6	120
78235A	ANTIQUÉ BRASS	6	120
78236A	POLISHED BRASS	6	120



Resi Lit Stucco Pushbutton

- 5/8" Diameter Lighted Gold Rim Pearl Button
- 2-1/2" Diameter Gold Anodized Aluminum plate and spring set

CAT. NO.	SLEEVE	CASE QTY
78239A	YES	200
78240A	NO	200



Decorative Pushbuttons



FIG 1



FIG 2



FIG 3

- Decorative Designs
- Back Lit Button
- Flush Mount Design
- 16 VDC

CAT. NO.	FIG	COLOR	DIMENSIONS	BOX QTY	CASE QTY
78252	1	WHITE	4" H X 1-1/8" W	6	120
78253	2	BLACK	4" H X 1-1/8" W	6	120
78256	3	PEWTER	3-1/4" H X 1-1/4" W	6	120

Gold Rim Lit Pushbutton



- 5/8" Diameter lighted gold rim pearl pushbutton
- Chrome finish
- 16V; 10VA

CAT. NO.	CASE QTY
78220A	500

Electric Door Release



- Commonly used in apartment & offices buildings
- Allows remote opening when energized
- Reversible for right or left hand doors
- Normally closed or locked, Mortise type
- Use with new or replacement wood or metal
- Brass finish face plate includes 2 brass mounting screws
- 8-16VAC, 3-6VDC - Use with 78200 transformer
- Face Plate: 1-1/4" x 5-7/8"
- Case: 1-5/16" x 3-5/8" x 1-7/16"
- Latch: 1-3/8" Opening

CAT. NO.	BOX QTY
70330	1

Reed Switch



- Triggers alarm when doors, windows & entry-ways are opened
- SPDT
- Max. 200mA Inrush Current
- 24 AC/DC; 30V AC/DC
- Normally Closed & Normally Open
- Magnetic Switch
- 3 Terminals
- Adhesive Backing

CAT. NO.	COLOR	BAG QTY
70501	WHITE	10

Door Switch



- Push button switch with metal box, cover plate & mounting hardware to operate lights when door is opened
- Typically used for closets, dark rooms, walk-in refrigerators
- Mounts in door jam
- 6" wire leads
- Mounting hole is approximately 1.25" x 2.75" x 2.0" (W x H x D)
- Normally on momentary contact
- AC/DC SPST, 10A 125 VAC, 10A 250 VAC



CAT. NO.	BOX QTY
70420	1

Roller Ball Door Contacts

- Suitable for security & alarm systems, signaling circuits and all types of general low voltage switching applications
- Used with Doors, Windows or Bells/Buzzers
- Designed to operate when depressed from any angle
- 70332 Door Closed - Circuit Off (light off) Door Open - Circuit On (light on)
- 70334 Door Closed - Circuit On (light on) Door Open - Circuit Off (light off)
- 70336 Door Closed/Opened - Momentary On (Buzzer/Bell on then off)
- Low Voltage Only 48 VAC Max, 2 Nickel Wood screws Included



CAT. NO.	TYPE	CONTACT VOLTS	AMPS AC	AMPS DC	DIA.	LENGTH	HOLE SPACING	BOX QTY
70332	OPEN CIRCUIT ON	12	2	2	.782	1.13	1.27	1
70334	OPEN CIRCUIT OFF	24	2	1	.782	1.13	1.27	1
70336	MAKE & BREAK CIRCUIT	48	1	0.5	.782	1.13	1.27	1

Transformers



- Quality transformers engineered to ensure long life with bells, buzzers, chimes, door openers, etc.
- Quick Clamp mounting feature allows quick & easy installation
- 120 VAC Input
- Thermally Protected
- Fits Standard Wiring Knockout Class 2 Energy Limiting Type



CAT. NO.	VOLTS	CASE QTY
78200A	16V 10 VA	20
78202A	16V 15 VA	20
78204A	8V 10VA; 16V 10 VA; 24 V 20 VA	20
78208	8V 20 VA; 16V 30 VA; 24V 30 VA	30
78210	24V; 40 VA	30
78212	10V; 5 VA	20