


# TAPE

CI - C7



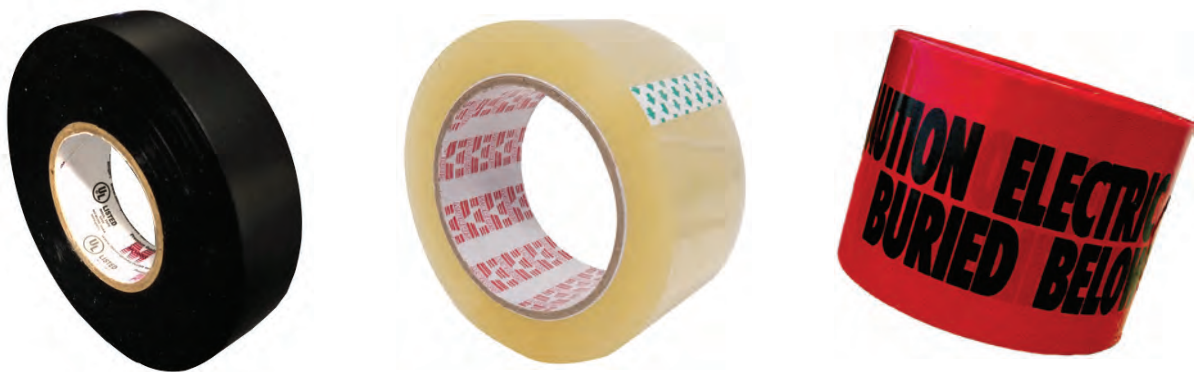

# 7 Mil Professional Grade Electrical Tape



- 3/4" X 66Ft X 7Mil
- All Weather Professional Grade Splicing Tape used as Primary Insulation up to 600V and as a Protective Outer Jacket up to 69KV
- Flame Retardant & Weather Resistant
- Excellent Cold Weather Resistant Properties -1°F to 221°F (-18°C to 105°C)
- High Dielectric Strength, High Adhesion and Shear
- Highly Elastic Polymeric Vinyl Backing - Excellent Elongation
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 & CSA 22.2 Approved
- ASTM-D-3005 HH-I-595C
- Lead Free

COMPARABLE TO 3M 33+ & 35



CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60110	BLACK	3/4" X 66FT	PLASTIC CUP	100
60111	RED	3/4" X 66FT	PLASTIC CUP	100
60112	WHITE	3/4" X 66FT	PLASTIC CUP	100
60113	YELLOW	3/4" X 66FT	PLASTIC CUP	100
60114	GREEN	3/4" X 66FT	PLASTIC CUP	100
60115	BLUE	3/4" X 66FT	PLASTIC CUP	100
60116	BROWN	3/4" X 66FT	PLASTIC CUP	100
60117	ORANGE	3/4" X 66FT	PLASTIC CUP	100
60118	GRAY	3/4" X 66FT	PLASTIC CUP	100
60119	VIOLET	3/4" X 66FT	PLASTIC CUP	100

# 8.5 Mil Professional Grade Heavy Duty Electrical Tape



- 8.5Mil
- Heavier thickness for added mechanical & electrical protection
- All Weather Professional Grade Splicing Tape used as Primary Insulation up to 600V and as a Protective Outer Jacket up to 69KV
- Flame Retardant & Weather Resistant
- Excellent Cold Weather Resistant Properties -1°F to 221°F (-18°C to 105°C)
- High Dielectric Strength, High Adhesion and Shear
- Highly Elastic Polymeric Vinyl Backing - Excellent Elongation
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 & CSA 22.2 Approved
- ASTM-D-3005 HH-I-595C
- Mil Spec Approved - MIL-I-24391C
- Lead Free

COMPARABLE TO 3M SUPER 88

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60205	BLACK	3/4" X 66FT	PLASTIC CUP	100
60206	BLACK	2" X 66FT	CELLO	40
60207	BLACK	2' X 108FT	CELLO	40

## 7 Mil Commercial Grade Electrical Tape



- 3/4" X 66Ft X 7Mil
- Used for General Purpose Splicing as Primary Insulation to 600V and as a Protective Outer Jacket at Higher Voltages
- Flame Retardant & Weather Resistant
- Cold Weather Resistant -1°F to 221°F (-18°C to 105°C)
- Good Dielectric Strength, High Adhesion and Shear
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 & CSA 22.2 Approved
- MIL-I-7798A
- Lead Free



COMPARABLE TO 3M HIGHLAND

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	SLEEVE QTY	CASE QTY
60100	BLACK	3/4" X 66FT	CELLO	10	100

## 8.5 Mil Commercial Grade Electrical Tape



- 8.5Mil
- Heavier thickness for added mechanical & electrical protection
- Used for General Purpose Splicing as Primary Insulation to 600V and as a Protective Outer Jacket at Higher Voltages
- Flame Retardant & Weather Resistant
- Cold Weather Resistant -1°F to 221°F (-18°C to 105°C)
- Good Dielectric Strength, High Adhesion and Shear
- Resistant to acids, alkalis, chemicals, oils, moisture and corrosion
- UL 510 & CSA 22.2 Approved
- MIL-I-7798A
- Lead Free




CAT. NO.	COLOR	SIZE	PACKAGING TYPE	SLEEVE QTY	CASE QTY
60200	BLACK	3/4" X 66FT	CELLO	10	100
60202	BLACK	2" X 66FT	CELLO	-	40

## General Purpose Vinyl Electrical Tape



- 3/4" X 60Ft X 7Mil
- Used for Protective Jacketing & Bundling/Harnessing
- Resistant to Acids, Alkalis, Chemicals, Oils, Moisture, Sunlight & Corrosion
- Flame Retardant and Weather Resistant
- UL 510 & CSA Approved
- Lead Free
- 600V

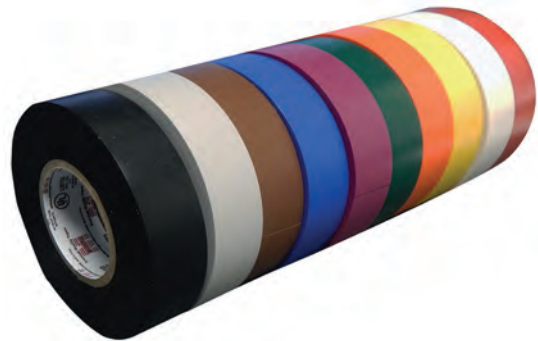

COMPARABLE TO 3M 1700

CAT. NO.	COLOR	PACKAGE TYPE	SLEEVE QTY	CASE QTY
60000	BLACK	CELLO	10	100
60010	RED	CELLO	10	100
60020	WHITE	CELLO	10	100
60030	YELLOW	CELLO	10	100
60040	GREEN	CELLO	10	100
60050	BLUE	CELLO	10	100
60060	BROWN	CELLO	10	100
60070	ORANGE	CELLO	10	100
60080	GRAY	CELLO	10	100
60090	VIOLET	CELLO	10	100

## Wire Harness Tape - 5 MIL



- Used for protecting, insulating, and bundling electrical wire harnesses
- High elongation & excellent conformability for wire harnesses
- 5 mil thickness

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60280	BLACK	3/4" X 66FT X 5MIL	BULK	208

## Friction Tape



COMPARABLE TO 3M 1755

- Cloth Construction Offering good Mechanical Protection Against Abrasion and Penetration of Cable, Splices and Wire
- Overwrap electrical connections
- Used for Temporary & Binding Tape Applications
- Adhesive Compound on both sides
- 1000V/mil minimum dielectric strength
- Meets ASTM-D699, .014" thickness

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60210	BLACK	3/4" X 60FT	CELLO	100
60212	BLACK	2" X 60FT	CELLO	50

## Rubber Splicing Tape - 600V



COMPARABLE TO 3M 2155

- Self Fusing Rubber with liner
- High quality unvulcanized rubber that will bond quickly to itself to form a solid mass of water-tight protection for electrical wires
- Primary insulation for electrical wires & cables splices of not more than 600V
- High elongation conforms to irregular shapes
- Flexible to withstand expansion and contraction
- High resistance to salt water, steam, oils, detergents, and other chemicals make it an ideal tape for pipe repair, automotive, marine, construction, etc.
- Dielectric strength 490 volts per mil, for use up to 176°F (80°C)

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60220	BLUE	3/4" X 22FT X 30MIL	CELLO	100
60222	BLUE	2" X 22FT X 30MIL	CELLO	50

## Tinned Copper Shield Tape



COMPARABLE TO 3M 24

- Tinned Copper Mesh Shielding Tape for Replacing Shield Layer in Shielded Cable Repair of High Voltage Splices & Terminations
- Highly Conformable, use to continue shielding across a splice
- Nonflammable & non-corrosive
- Compatible with cable oils, common solvents & adhesives
- Highly Conductive, Easily Soldered
- 1" Width allows for easy application and overlap for increased safety

CAT. NO.	SIZE	PACKAGE TYPE	CASE QTY
60260	1" X 15FT	BOXED	40



## High Voltage Rubber Tape - 69KV

- Liner-Less Self Bonding High Voltage 30 mil EPR rubber Insulating Tape for Insulating and Jacketing Splices through 69KV
- Can also be used for building stress cones on power cable through 35KV
- Self-bonding, Self Amalgamating High Voltage Tape, provides tight, moisture resistant insulation without loss of electrical properties when elongated - Yields a Void-Free Build Up
- Excellent Corona, Ozone, and Chemical Resistance
- Permits Quicker Application than tape with liner
- ASTM-D-4388; HH-I-553C

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60250	BLACK	3/4" X 30FT X 30MIL	BOXED	60
60252	BLACK	1-1/2" X 30FT X 30MIL	BOXED	30

## Mastic Insulating Tape - 600V

- Self-Amalgamating 600V Rubber Mastic Tape
- For Insulating and Moisture Sealing all types of Overhead and Direct Burial Electrical Connections up to 600 Volts
- Can be wrapped, stretched or molded around irregular shapes for insulation build up, water sealing & surface protection
- Superior adhesion, moisture, & chemical resistance to Metals & Cable Insulations with no adverse effects on Polymeric Conducting Shields
- For Sealing Ductwork, Cable Ends, and all types of Splices
- 125 Mils, Black Color

CAT. NO.	FIG	SIZE	PACKAGING TYPE	CASE QTY
60240	1	3-3/4" X 10FT	BOXED	12
60242	2	3-3/4" X 3-3/4" PAD	BOXED	80
60244	2	3-3/4" X 6-1/2" PAD	BOXED	32

## Self Amalgamating Filler Tape

- Low Voltage Rubber Tape for Insulating compound designed for quick, Void-Free Insulation Build-Up
- Can easily be molded by hand to conform to irregular shapes
- Can be used a primary insulation for splices through 5KV in conjunction with other insulating tapes
- Ideal for covering split bolts, padding bus bar edges and connections
- Provides excellent moisture seal
- 125 Mils


CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60235	BLACK	1-1/2" X 5FT	BOXED	24

## Pipe Wrap Tape

- Heavy Gauge Pressure Sensitive Vinyl Tape
- To protect pipe surfaces from Corrosion, Abrasion & Electrolytic action
- Complete Environmental, Mechanical, & Electrical Protection for all types of pipe, conduit, joints & valves
- Can be used indoors or outdoors for overhead or direct burial applications
- Outstanding protection against sunlight, water, acids, corrosive salts & sewage
- UV, bacteria, and fungus resistant
- Lead-free, UPC approved

CAT. NO.	COLOR	SIZE	PACKAGE TYPE	CASE QTY
60270	BLACK	2" X 100FT X 10MIL	CELLO	24
60272	BLACK	2" X 100FT X 20MIL	CELLO	24

WWW.MORRISPRODUCTS.COM



COMPARABLE TO 3M 130C



FIG 1


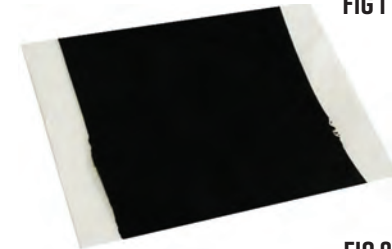


FIG 2

COMPARABLE TO 3M 2229



COMPARABLE TO 3M SCOTCHFIL



COMPARABLE TO 3M 50

1-888-777-6678



TAPE

Rubber Splicing

C4



## Cork Insulation Tape



T6-330

- Adheres firmly to all metals.
- Use on hot or cold pipes to stop condensation and drips

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T6-330	CORK INSULATION TAPE - 1/8" X 2" X 30' ROLL - BLACK	EA	1

## Foam Insulation Tape



T6-9718

- Superior self-adhesive foam tape can be used on hot or cold pipes
- Fits well around valves and fittings.
- Easily cut and molded

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T6-9718	FOAM INSULATION TAPE - 1/8" X 2" X 30' ROLL - BLACK	EA	1

## Double-Sided Adhesive Foam Tape



ADHESIVE ON BOTH SIDES

- Use to affix raceway, duct, track lighting, signs, etc.
- EVA Foam offers excellent shear strength, softness, flexibility, low temperature toughness, stress-crack resistance, waterproof properties, UV resistance & conformity to irregular surfaces
- Superior Holding Power - Acrylic adhesive allows high initial adhesion and high instant tack for effective long term bonding to glass, metal, plastic, wood & various other surfaces

CAT. NO.	WIDTH	LENGTH	BAG QTY
22512	.32"	165FT	1

## Clear Packaging Tape



- Quick-stick self-adhesive backing
- Resists abrasions, water solvents and oils
- Use in dispensers to easily seal cartons
- 2Mil Acrylic Adhesive
- 46 lbs per inch tensile strength

COMPARABLE TO 3M TARTAN

CAT. NO.	COLOR	SIZE	PACKAGING TYPE	CASE QTY
60291	CLEAR	1.88" X 109 YARDS	CELLO	36

## PTFE Tape



T6-733

- Made of pure white PTFE.
- Non toxic.
- For use with chemicals, solvents, oxygen, and on food lines.
- Withstands up to 2000 psi of pressure.

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T6-733	TEFLON TAPE - 1/2" X 520"	EA	1

## Sure-Stick Heavy Duty Adhesive Spray



T315-20

- Wide web spray adhesive ideal for both temporary or permanent bonding.
- Waterproof, transparent and non-staining.
- Use for the toughest adhesive applications with leather, cardboard, most plastics, polyethylene sheeting and insulation in HVAC applications.
- Cleans with mineral spirits.
- Not for use on vinyl.

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T315-20	SURE-STICK ADHESIVE SPRAY - 12 OZ. AEROSOL	EA	12

## Stick-E-Tape



T50302

- Self adhesive aluminum tape with temperature range of 40° F to 200° F.
- Easily painted.
- Excellent vapor barrier.
- Effective UV and water shield over urethane foam.
- Preferred duct and pipe wrap.

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T50302	STICK-E-TAPE - AFT-701-2 - 2" X 50' ROLL	EA	1

## Strapping Tape



COMPARABLE TO 3M 897

- Superior strength for carton sealing, bundling of packages together & reinforcing applications
- Glass-filament reinforced tape to give superior strength
- 150 lbs per inch tensile strength

CAT. NO.	SIZE	PACKAGING TYPE	CASE QTY
60295	3/4" X 60 YARDS	CELLO	48

## Cloth Duct Tape

- Polyethylene backing provides moisture resistance
- Strong hot melt rubber adhesive adheres aggressively to most surfaces for good holding power & a tight seal
- Perfect for areas with water & humidity
- Provides rust, chemical, & abrasion resistance
- Industry choice for most new, maintenance & repair HVAC applications
- Also use for masking, sealing, packaging, bundling & other general purpose applications
- Easy tear & high tensile strength

CAT. NO.	SIZE	PACKAGING TYPE	CASE QTY
<b>CONTRACTOR GRADE</b>			
60190	1.88" X 50 YARDS X 5.8MIL	CELLO	24
<b>PREMIUM UTILITY GRADE</b>			
60195	1.88" X 50 YARDS X 9.0MIL	CELLO	24



COMPARABLE TO 3M 1900 & 3939

## Flex Duct Tape

- Specially designed to meet new UL181B FX code for flex duct. for superior performance in extreme environments. (35°F to 260°F)
- Higher adhesion and tack than traditional cloth duct tapes.
- Conformable, hand tearable foil.
- 3 mil thickness.
- 2 in. x 120 yds.
- Code identification printed on the tape.
- Acrylic adhesive

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T640-FD2S	FLEX DUCT TAPE - SILVER - 2"	EA	1
T640-FD3S	FLEX DUCT TAPE - SILVER - 3"	EA	1



T640-FD2S

## Aluminum Foil Tape

- Prevents heating and cooling losses.
- Blocks odors and moisture.
- Use for HVAC and refrigeration systems.
- Easy to handle.
- 35°F to plus 260°F working temperatures.
- 3-5 year shelf life.
- Made in USA.

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T640-AF2	2" ALUMINUM FOIL TAPE - 50 YDS.	EA	1
T640-AF25	2-1/2" ALUMINUM FOIL TAPE - 50 YDS.	EA	1
T640-AF3	3" ALUMINUM FOIL TAPE - 50 YDS.	EA	1



T640-AF2

## UL Listed Foil Tape

- Unique acrylic adhesive for airtight bonds on joints and seams of fiberglass duct systems.
- Flexible, easy to use.
- Meets or exceeds performance standard AFLS 100 73 and UL 181 A P.



T640-UL25

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T640-UL25	UL 181 LISTED FOIL TAPE - 2-1/2" - 60 YARDS	EA	1
T640-UL3	UL 181 LISTED FOIL TAPE - 3" - 60 YARDS	EA	1

## Foil Scrim Kraft Tape

- Non tearable, diamond patterned backing.
- Aggressive rubber based adhesive system for consistently dependable performance.
- Made in the USA.



T640-FSK2

CAT. NO.	DESCRIPTION	UOM	ORDER MULTIPLE
T640-FSK2	FOIL SCRIM KRAFT TAPE - 2" - 50 YARDS	EA	1
T640-FSK3	FOIL SCRIM KRAFT TAPE - 3" - 50 YARDS	EA	1

## Barricade Tape



- CAUTION CAUTION CAUTION Legend
- Made of long lasting, non-adhesive, reusable 3 mil Polyethylene
- Exceptional quality, durability and performance
- Used above ground to mark off hazards
- Continuous repeat of warning
- Meets OSHA 1910.144 for physical hazards

CAT. NO.	LEGEND	SIZE	COLOR	BOX QTY
69002	CAUTION CAUTION CAUTION	3" X 200'	YELLOW	8
69000	CAUTION CAUTION CAUTION	3" X 1000'	YELLOW	8
<b>NEW</b> 69003	CAUTION/CUIDADO	3" X 1000'	YELLOW	8
<b>NEW</b> 69004	DANGER	3" X 1000'	RED	8
<b>NEW</b> 69005	DO NOT ENTER	3" X 1000'	YELLOW	8
<b>NEW</b> 69006	DANGER DO NOT ENTER	3" X 1000'	RED	8

## Underground Detectable Tape



- 4 Mil Non Adhesive Polyethylene
- Continuous repeat of warning
- Identifies buried utility lines
- Should be installed 12" to 18" below ground level and 12" above pipes and conduits before backfilling
- Formulated to resist degradation from acid and alkali found in soils

CAT. NO.	LEGEND	SIZE	COLOR	BOX QTY
69008	CAUTION BURIED ELECTRIC LINE BELOW	3" X 300'	RED	8
69010	CAUTION BURIED ELECTRIC LINE BELOW	3" X 1000'	RED	8
69011	CAUTION ELECTRIC LINE BURIED BELOW	3" X 1000'	YELLOW	8
69012	CAUTION BURIED TELEPHONE LINE BELOW	3" X 1000'	ORANGE	8
69016	CAUTION FIBER OPTIC LINE BURIED BELOW	3" X 1000'	ORANGE	8
69020	CAUTION BURIED ELECTRIC LINE BELOW	6" X 1000'	RED	4
69021	CAUTION ELECTRIC LINE BURIED BELOW	6" X 1000'	YELLOW	4

## Detectable Tape



- CAUTION BURIED ELECTRIC LINE BELOW Legend
- 5 Mil Silver foil
- Continuous repeat of warning
- Easily located with any common metal detector
- For use before you dig
- Its highly visible colors make it easy to locate after dig has begun
- Formulated to resist degradation from acid and alkali found in soils
- 3" Wide detectable from 12" To 24" Depth
- 6" Wide detectable from 22" To 30" Depth

CAT. NO.	LEGEND	SIZE	COLOR	BOX QTY
69030	CAUTION BURIED ELECTRIC LINE BELOW	3" X 1000'	RED	4
69040	CAUTION BURIED ELECTRIC LINE BELOW	6" X 1000'	RED	2
<b>NEW</b> 69042	CAUTION BURIED FIBER OPTIC LINE BELOW	3" X 1000'	ORANGE	4
<b>NEW</b> 69044	CAUTION BURIED FIBER OPTIC LINE BELOW	6" X 1000'	ORANGE	2
<b>NEW</b> 69046	CAUTION BURIED WATER LINE BELOW	3" X 1000'	BLUE	4
<b>NEW</b> 69048	CAUTION BURIED WATER LINE BELOW	6" X 1000'	BLUE	2
<b>NEW</b> 69050	CAUTION BURIED SEWER LINE BELOW	3" X 1000'	GREEN	4
<b>NEW</b> 69052	CAUTION BURIED SEWER LINE BELOW	6" X 1000'	GREEN	2